AC Filter for PCB Mounting Cost Optimized



See below:

Approvals and Compliances

Description

- Line filter in standard and medical version
- 1-stage
- standard attenuation

Characteristics

- Cost-saving plastic housing Designed for standard applications
- Protection against interference voltage from the mains Possible interferences generated in the equipment are strongly attenuated
- For standard applications
- Suitable for use in equipment according to IEC/UL 62368-1

Other versions on request

- Version with wire connection
- Medical Version (M80)

References

Alternative: Standard version

Weblinks

pdf data sheet, html datasheet, General Product Information, Approvals, Distributor-Stock-Check, Detailed request for product, Microsite

Technical Data	
Ratings IEC	0.6 - 6A @ Ta 40 °C / 250 VAC; 50 Hz
Ratings UL/CSA	0.6 - 6A @ Ta 40 °C / 125 VAC; 60 Hz
Leakage Current	standard < 0.25 mA (250 V / 60 Hz) medical < 5 µA (250 V / 60 Hz)
Dielectric Strength	> 1.7 kVDC between L-N > 2.7 kVDC between L/N-PE Test voltage (2 sec)
Allowable Operation Temperature	-25 °C to 85 °C
Climatic Category	25/085/21 acc. to IEC 60068-1
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	For PCB mounting, tin-plated

Thermoplastic, black, UL 94V-0

Line Filter	Standard and Medical Version, IEC 60939, UL 1283, CSA C22.2 no. 8 Technical Details
MTBF	> 200'000h acc. to MIL-HB-217 F

Approvals and Compliances

Material

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: FPP2

Approval Logo	Certificates	Certification Body	Description
10	VDE Approvals	VDE	Certificate Number: 40004673
c FU °us	UL Approvals	UL	UR File Number: E72928

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60939	Passive filters for suppressing electromagnetic interference
(I)	Designed according to	UL 1283	Passive filters for suppressing electromagnetic interference
CSA Group	Designed according to	CSA C22.2 no. 8	Electromagnetic interference (EMI) filters

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Part 1: Safety requirements
<u>IEC</u> ,	Suitable for applications acc.	IEC 60601-1	Medical electrical equipment - Part 1: General requirements for basic safety and essential performance


Compliances


The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
UK CA	UKCA declaration of conformity	SCHURTER AG	The UKCA marking declares that the product complies with the applicable requirements laid down in the British Amendment of Regulation (EC) 765/2008.
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.
T	Medical Equipment	SCHURTER AG	Suitable for use in medical equipment according to IEC/UL 60601-1 (1 MOOP, 1 MOPP)


Dimension [mm]

Case 13P Case 18P

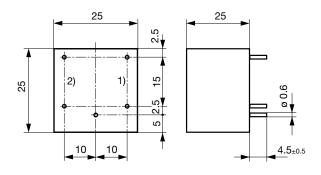

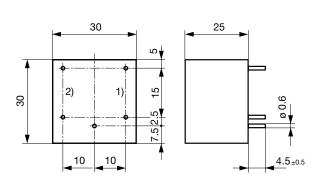


Case 24P

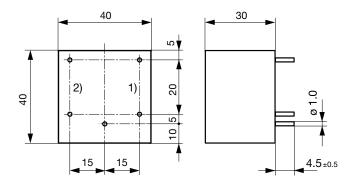


- 1) Line 2) Load

Diagrams

S1 standard version

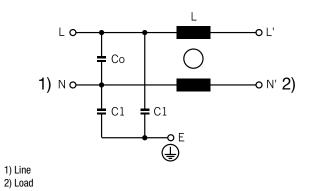


S2 medical version

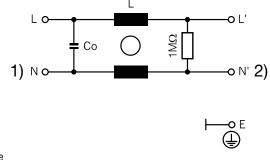


Attenuation Loss

Standard version


0.6 A



1 A




2 A




4 A


- - - - 50Ω differential mode _____ 50Ω common mode




6 A




0.7 A




1 A




2 A




3 A



1 A




3 A




Medical version (M5)


 $0.6\,A$




1 A




2 A




4 A




6 A




0.7 A




1 A




2 A




3 A



1 A



3 A



All Variants

Rated Current [A]	Filter-Type	L [mH]	Co / C2 (X2) [μF]	C1 (Y2) [nF]	Diagram	Weight [g]	Housing	Order Number
0.6	Standard version	2 x 40	0.015	2.2	S1	27 g	13P	5500.2000
1	Standard version	2 x 10	0.015	2.2	S1	27 g	13P	5500.2001
2	Standard version	2 x 4	0.015	2.2	S1	27 g	13P	5500.2002
4	Standard version	2 x 1.5	0.015	2.2	S1	27 g	13P	5500.2003
6	Standard version	2 x 0.8	0.015	2.2	S1	35 g	13P	5500.2004
0.7	Standard version	2 x 40	0.015	2.2	S1	32 g	18P	5500.2005
1	Standard version	2 x 20	0.022	2.2	S1	32 g	18P	5500.2006
2	Standard version	2 x 6	0.022	2.2	S1	32 g	18P	5500.2007
3	Standard version	2 x 3	0.022	2.2	S1	32 g	18P	5500.2008
1	Standard version	2 x 30	0.047	2.2	S1	78 g	24P	5500.2009
3	Standard version	2 x 4	0.047	2.2	S1	78 g	24P	5500.2010
0.6	Medical Version (M5)	2 x 40	0.015	-	S2	35 g	13P	5500.2116
1	Medical Version (M5)	2 x 10	0.015	-	S2	35 g	13P	5500.2117
2	Medical Version (M5)	2 x 4	0.015	-	S2	25.5 g	13P	5500.2118
4	Medical Version (M5)	2 x 1.5	0.015	-	S2	35 g	13P	5500.2119
6	Medical Version (M5)	2 x 0.8	0.015	-	S2	35 g	13P	5500.2120
0.7	Medical Version (M5)	2 x 40	0.015	-	S2	45 g	18P	5500.2121
1	Medical Version (M5)	2 x 20	0.022	-	S2	45 g	18P	5500.2122
2	Medical Version (M5)	2 x 6	0.022	-	S2	45 g	18P	5500.2123
3	Medical Version (M5)	2 x 3	0.022	-	S2	45 g	18P	5500.2124
1	Medical Version (M5)	2 x 30	0.047	-	S2	78 g	24P	5500.2125
3	Medical Version (M5)	2 x 4	0.047	-	S2	78 g	24P	5500.2126

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit

50 Pcs

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Schurter:

5500.2124	5500.2133	5500.2131	5500.2122	5500.2116	5500.2129	5500.2119	5500.2127	5500.2132	5500.2128
5500.2120	5500.2118	5500.2123	5500.2125	5500.2121	5500.2117	5500.2130	5500.2126	5500.2006	5500.2002
5500.2004	5500.2008	5500.2001	5500.2005	5500.2007	5500.2003	5500.2009	5500.2020	5500.2000	5500.2016
5500.2019	5500.2014	5500.2018	5500.2010	5500.2017	5500.2015				