

Transformer for BCM6526




Descriptions


- Size (Max.):LxWxH 8.1x8.0x9.85mm
- Custom design is available.
- VDSL line transformer.
- Ideally used in VDSL/VDSL2 CO equipments.
- Approved by Broadcom (BCM6511/6526, BCM6516/6524) and Alcatel.
- RoHS Compliance
- Sumida Type name : CEP710B




Dimensions (mm)

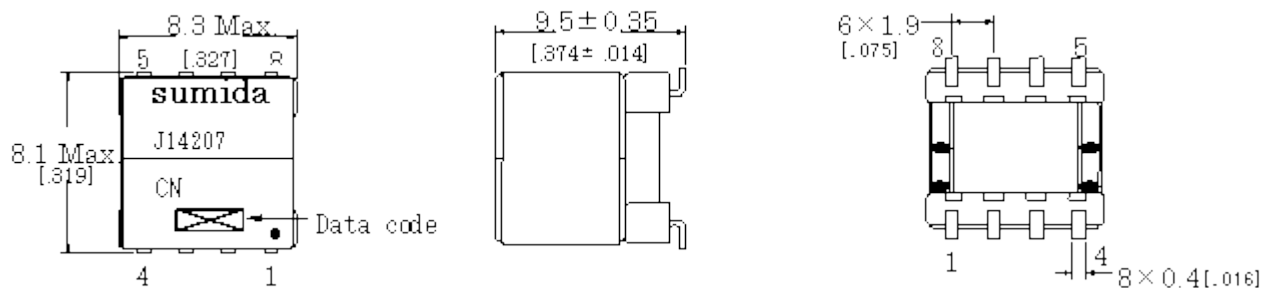

Land patterns (mm)



Schematic (Bottom View)

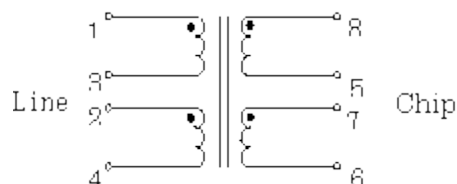

Remarks : Sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text
sample text sample text sample text sample text sample text sample text.

Transformer for BCM6526



Electrical characteristics

Part No.	Item	Inductance (1-4)	Leakage Inductance (1-4)	Turns ratio (T/R) (1-4): (8-6)	Total Harmonic Distortion (THI)	Inter winding capacitance C _{ww} (1-8)
J14202	Specifications	420μH ±10% within	Max. 1.3μH	2.5 : 1 (±1%)	Max. -60dB	Max.30pF
	Testing conditions	10kHz 0.1V Tie(2+3)	1MHz, 0.1V, Tie [(2+3), (5+6+7+8)]	100kHz, 0.1Vrms, Tie[(2+3), (6+7)]	30kHz 3.0Vrms	100kHz 0.1V Tie[(2+3), (6+7)]

Part No.	Item	Longitudinal Balance (LB)			D.C.R. (8-6)	D.C.R. (1-4)
J14202	Specifications	Min.44dB	Min.40dB	Min.30dB	Max.0.5Ω	Max.0.7Ω
	Testing conditions	12MHz, Tie (2+3), (6+7) Grounded	17MHz, Tie (2+3), (6+7) Grounded	30MHz, Tie (2+3), (6+7) Grounded	Tie (6+7)	Tie (2+3)

Part No.	Item	Hi-pot (1-2)	Hi-pot (1-8)
J14202	Specifications	Min.750Vrms	Min.1,875Vrms.
	Testing conditions	Max.0.5mA, 1sec.	Max.0.5mA, 1sec. Tie [(2+3), (5+7)]



For sales office information, please [click here](#) to visit our website.

Remarks : Sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text sample text
sample text sample text sample text sample text sample text sample text.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Sumida:](#)

[J14202](#)