



S8655P

Mini RFID Panel Antenna

865-870 MHZ 5.5 DBIC CP MINI RFID PANEL ANTENNA

The S8655P is a high-performance RFID antenna lineup and is the only UHF RFID antenna available to the market that offers no-compromise performance in a small package. At only 5.2" square the antenna offers a gain specification of 5.0 dBic and axial ratio better than 2 dB. In effect the antenna is providing the performance one would expect of a much larger antenna. The antenna is not only mechanically robust but is less likely to be exposed to excessive damage by virtue of its reduced size.


FEATURES

- Low profile
- Extremely low VSWR and axial ratio
- IP 67 Rated
- Weather and UV resistant radome
- Wide range of connector options
- Left hand and right hand CP versions

APPLICATIONS

- Warehouse
- Distribution center
- Airports and hospitals
- Transit terminals
- Conveyor belt

ELECTRICAL SPECIFICATION	
Antenna Part Number	S8655PR and S8655PL
Frequency Range	865 - 870 MHz
Gain	5.0 dBi
Maxium VSWR	1.5:1
3 dB Beamwidth - Azimuth	100°
Front to Back Ratio	8 dB
Polarization	Circular RH or Circular LH
Maxium Input Power	10 Watts
Input Impedence	50 Ohms
Axial Ratio	2.0 dB Typical
Weight lb. (Kg)	1.0 lbs (.45)
Mechanical Size in. (mm)	5.2" x 5.2" x .71" (132.1 x 132.1 x 17.8)
Antenna Connection	Type N Female, RP-TNC Female, RP-SMA Female, SMA Female
Radome	White or Charcoal High Strength PC
Mount Style	Threaded Stud 2x #10-32
Temperature Operational	-30°C to +70°C
Storage Temperature	40°C to 85°C
Impact Resistance	1 lbs. Ball Drop, 24"
Salt	MIL-STD-810
Vibration	MIL-STD-810
Shock	IEC 68-2-27
Humidity	IEC 68-2-30
Lightning Protection	DC Grounded
Enclosure Rating	IP 67

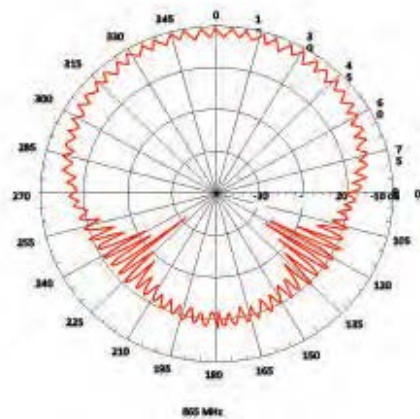

TE TECHNICAL SUPPORT CENTER

USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico:	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks owned or licensed by the TE Connectivity plc family of companies. Other product names, logos, and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this document, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, complete, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES REGARDING THE INFORMATION CONTAINED HEREIN, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event will TE be liable for any direct, indirect, incidental, special or consequential damages arising from or related to recipient's use of the information. It is the sole responsibility of recipient of this information to verify the results of this information using their engineering and product environment. Recipient assumes any and all risks associated with the use of the information. Antenna performance may vary. TE is a component manufacturer, and customer and/or end-user is responsible for all end-use compliance and regulatory requirements.

©2025 TE Connectivity. All Rights Reserved.

05/25 Original

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[S8655PLRTN](#)