

REV. A

DCO 144520

COIL: @ 25°C

RESISTANCE 1350 OHMS $\pm 10\%$

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:

VIBRATION 10 Hz TO 3000 Hz @ 30 g's


SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.

STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

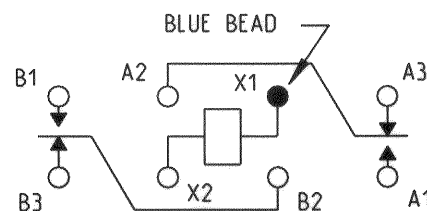

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
50,000 OPERATIONS

DR. B.D. 11SEP2008

CK.



Tyco Electronics

©COPYRIGHT 2005

TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. QPL

CUST. NO. M39016/13-066P REV.

TE NUMBER

1-1617073-9

CII PART NUMBER

3SBC 2011A2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3SBC2011A2](#)