

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - BY - ALL RIGHTS RESERVED.





LOC

DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	V2	REFERENCE FOR OVERALL PITCH DIMENSION CORRECTED	09MAR2017	SS	PS

PART NUMBER BOX PACKAGING	PART NUMBER REEL PACKAGING	NO OF POS "n"	DIMENSION "A" MAX
7-215083-4	215083-4	4	8,6
7-215083-6	215083-6	6	11,1
7-215083-8	215083-8	8	13,6
8-215083-0	1-215083-0	10	16,2
8-215083-2	1-215083-2	12	18,7
8-215083-4	1-215083-4	14	21,3
8-215083-6	1-215083-6	16	23,8
8-215083-8	1-215083-8	18	26,3
9-215083-0	2-215083-0	20	28,9
9-215083-4	2-215083-4	24	34,0

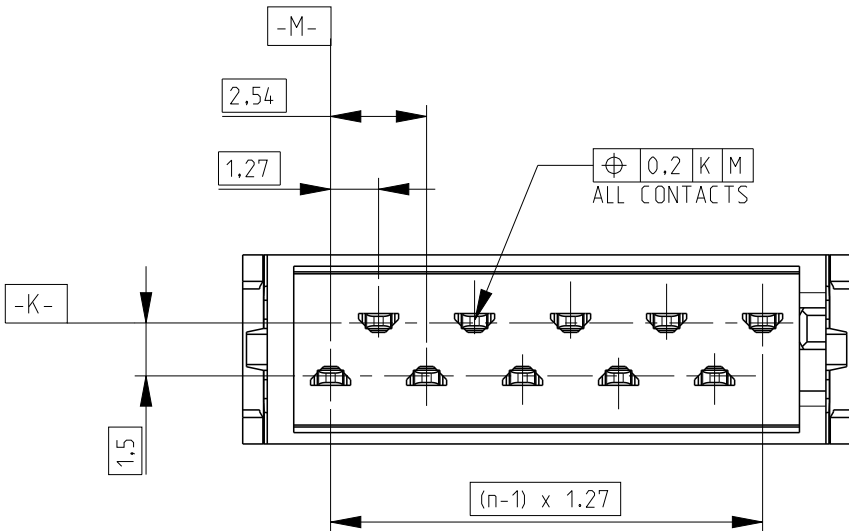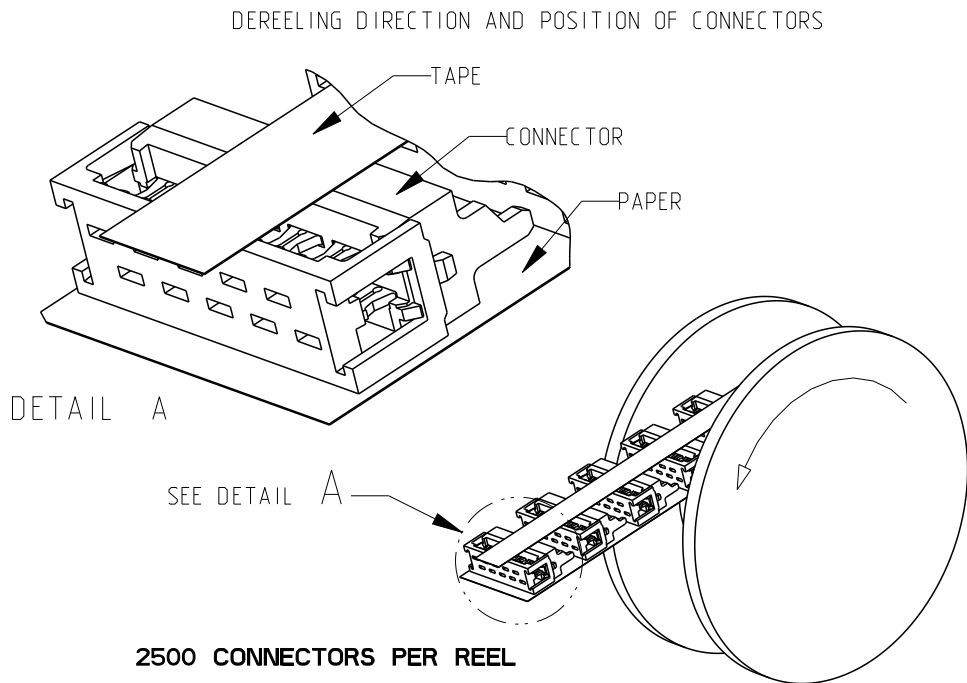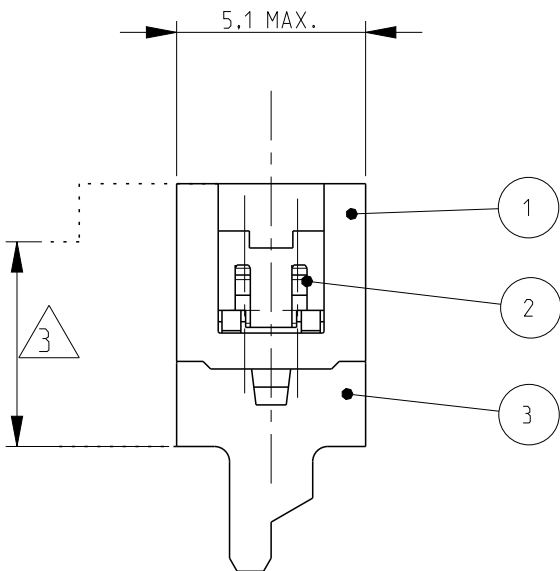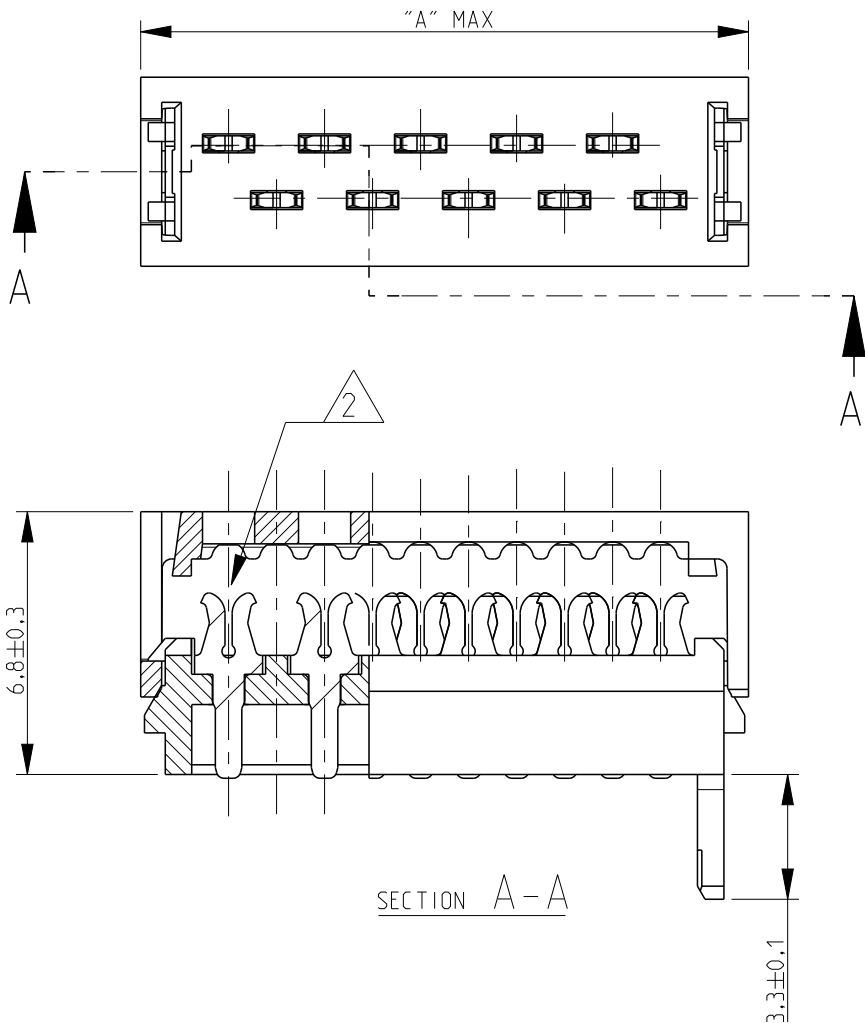

NOTES;

1. SHOWN IS A 10 POSITION CONNECTOR

2 FOR FLAT RIBBON CABLE REQUIREMENTS.
SEE APPLICATION SPEC 114-19016.

3 CONNECTOR-HEIGHT AFTER CABLE TERMINATION 5.1 mm AVERAGE.
DEPENDING ON PROCESSING, SEE APPLICATION SPEC 114-19016.

250 CONNECTORS PER BOX
BOX PACKAGING

2500 CONNECTORS PER REEL
REEL PACKAGING

--	GLASS FILLED POLYESTER (RED)	HOUSING	3
TIN OVER NICKEL PLATING	PHOSPHOR BRONZE	MALE CONTACT	2
--	GLASS FILLED POLYESTER (RED)	COVER	1
FINISH	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
FINISH	SEE TABLE

MATERIAL SEE TABLE

DWN	P.V.Tongerren	-
CHK	H SPELDE	24-08-01
APVD	H SPELDE	24-08-01
PRODUCT SPEC	108-19052	
APPLICATION SPEC	114-19016	
WEIGHT	-	

Customer Drawing



TE Connectivity

Micro-MaTch
MALE-ON-WIRE CONNECTOR

NAME	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	A3	00779	C-215083	-

SCALE 5:1 SHEET 1 OF 1 REV V2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-215083-0](#)