

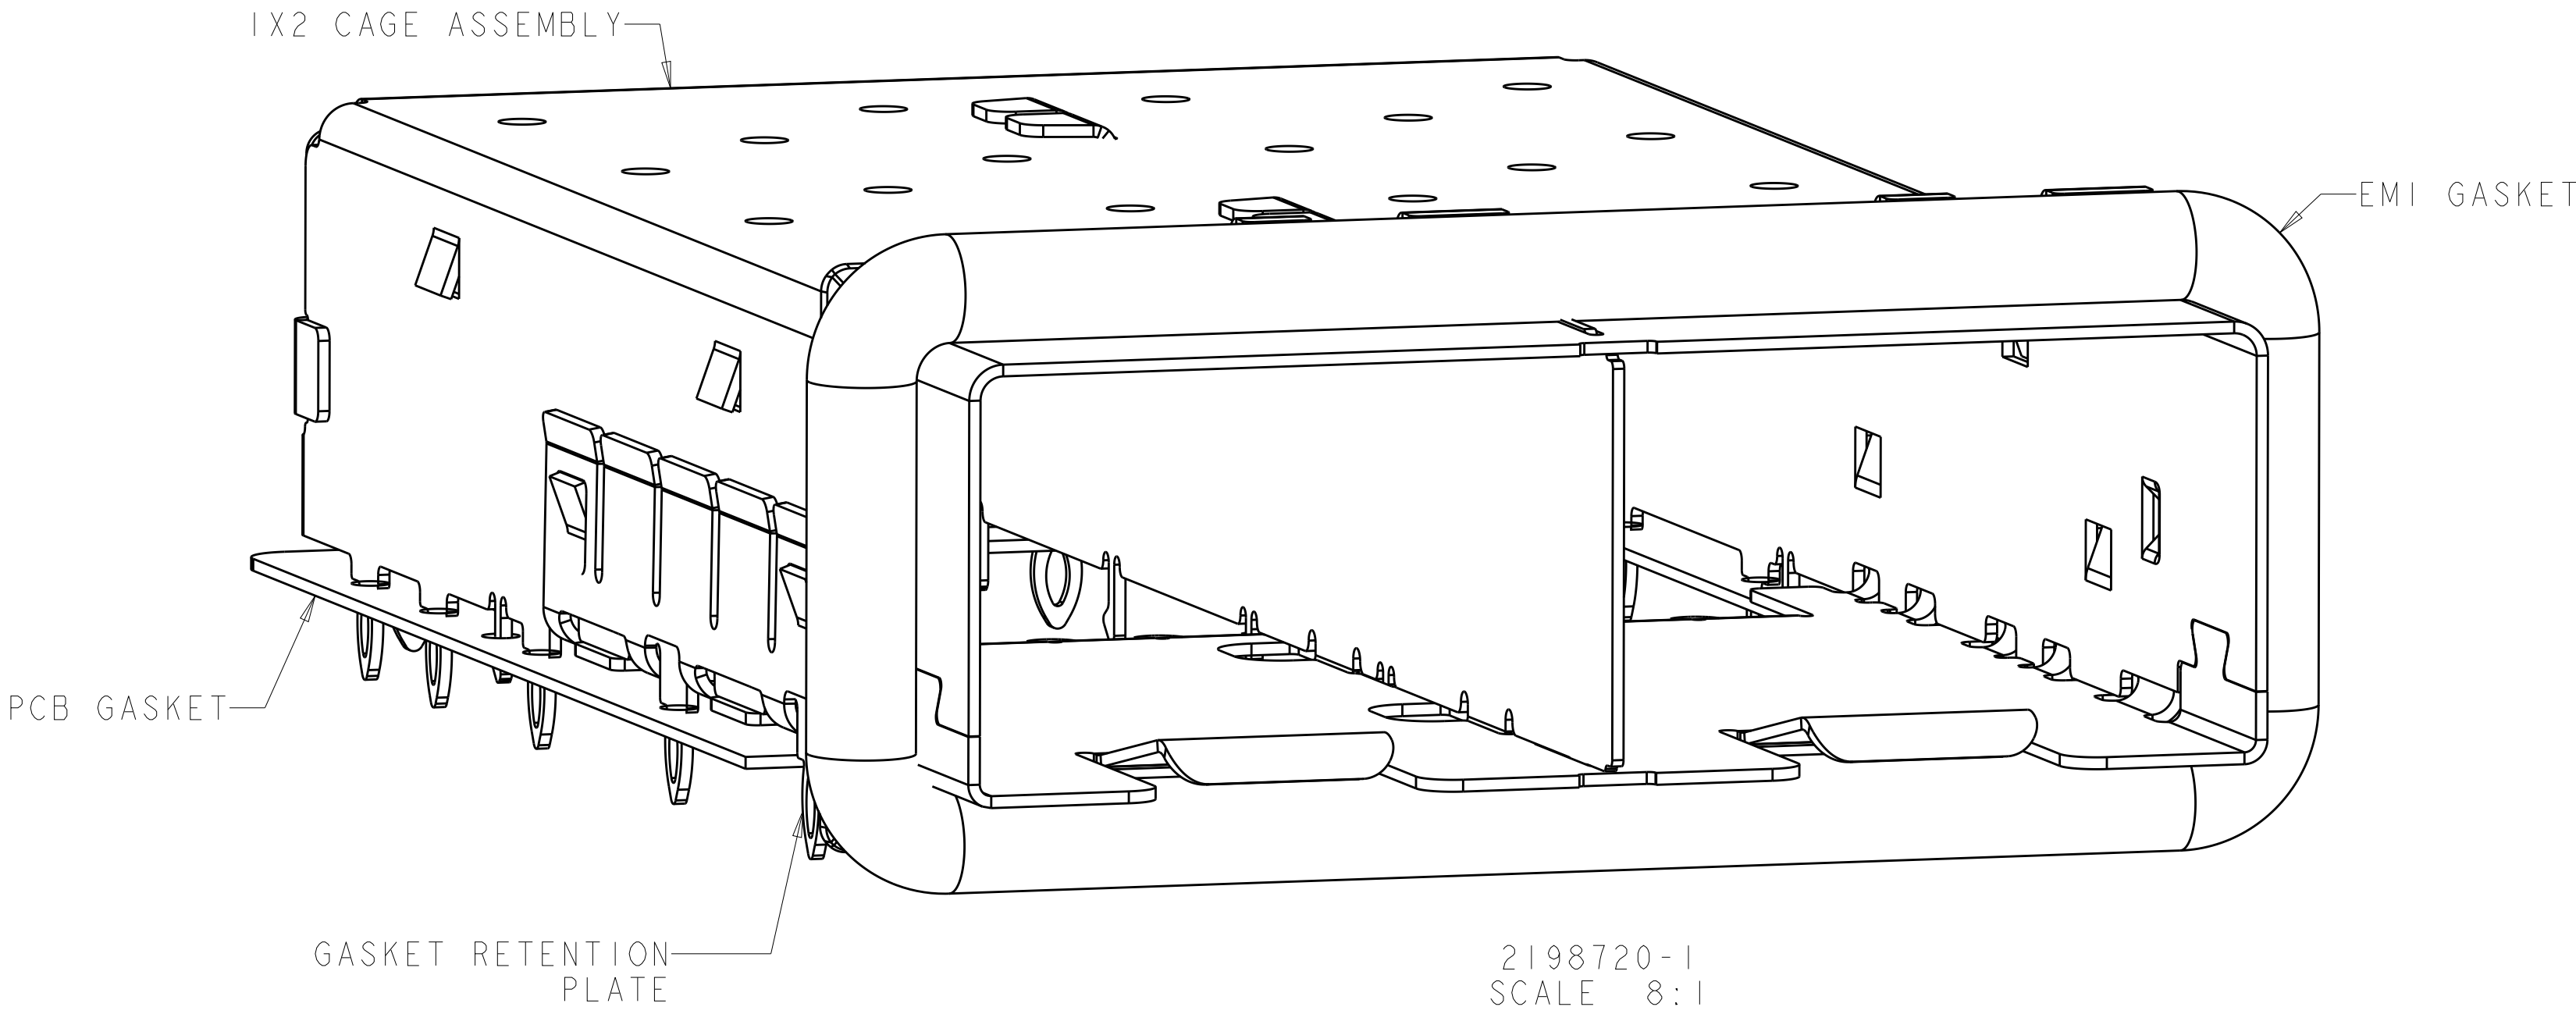
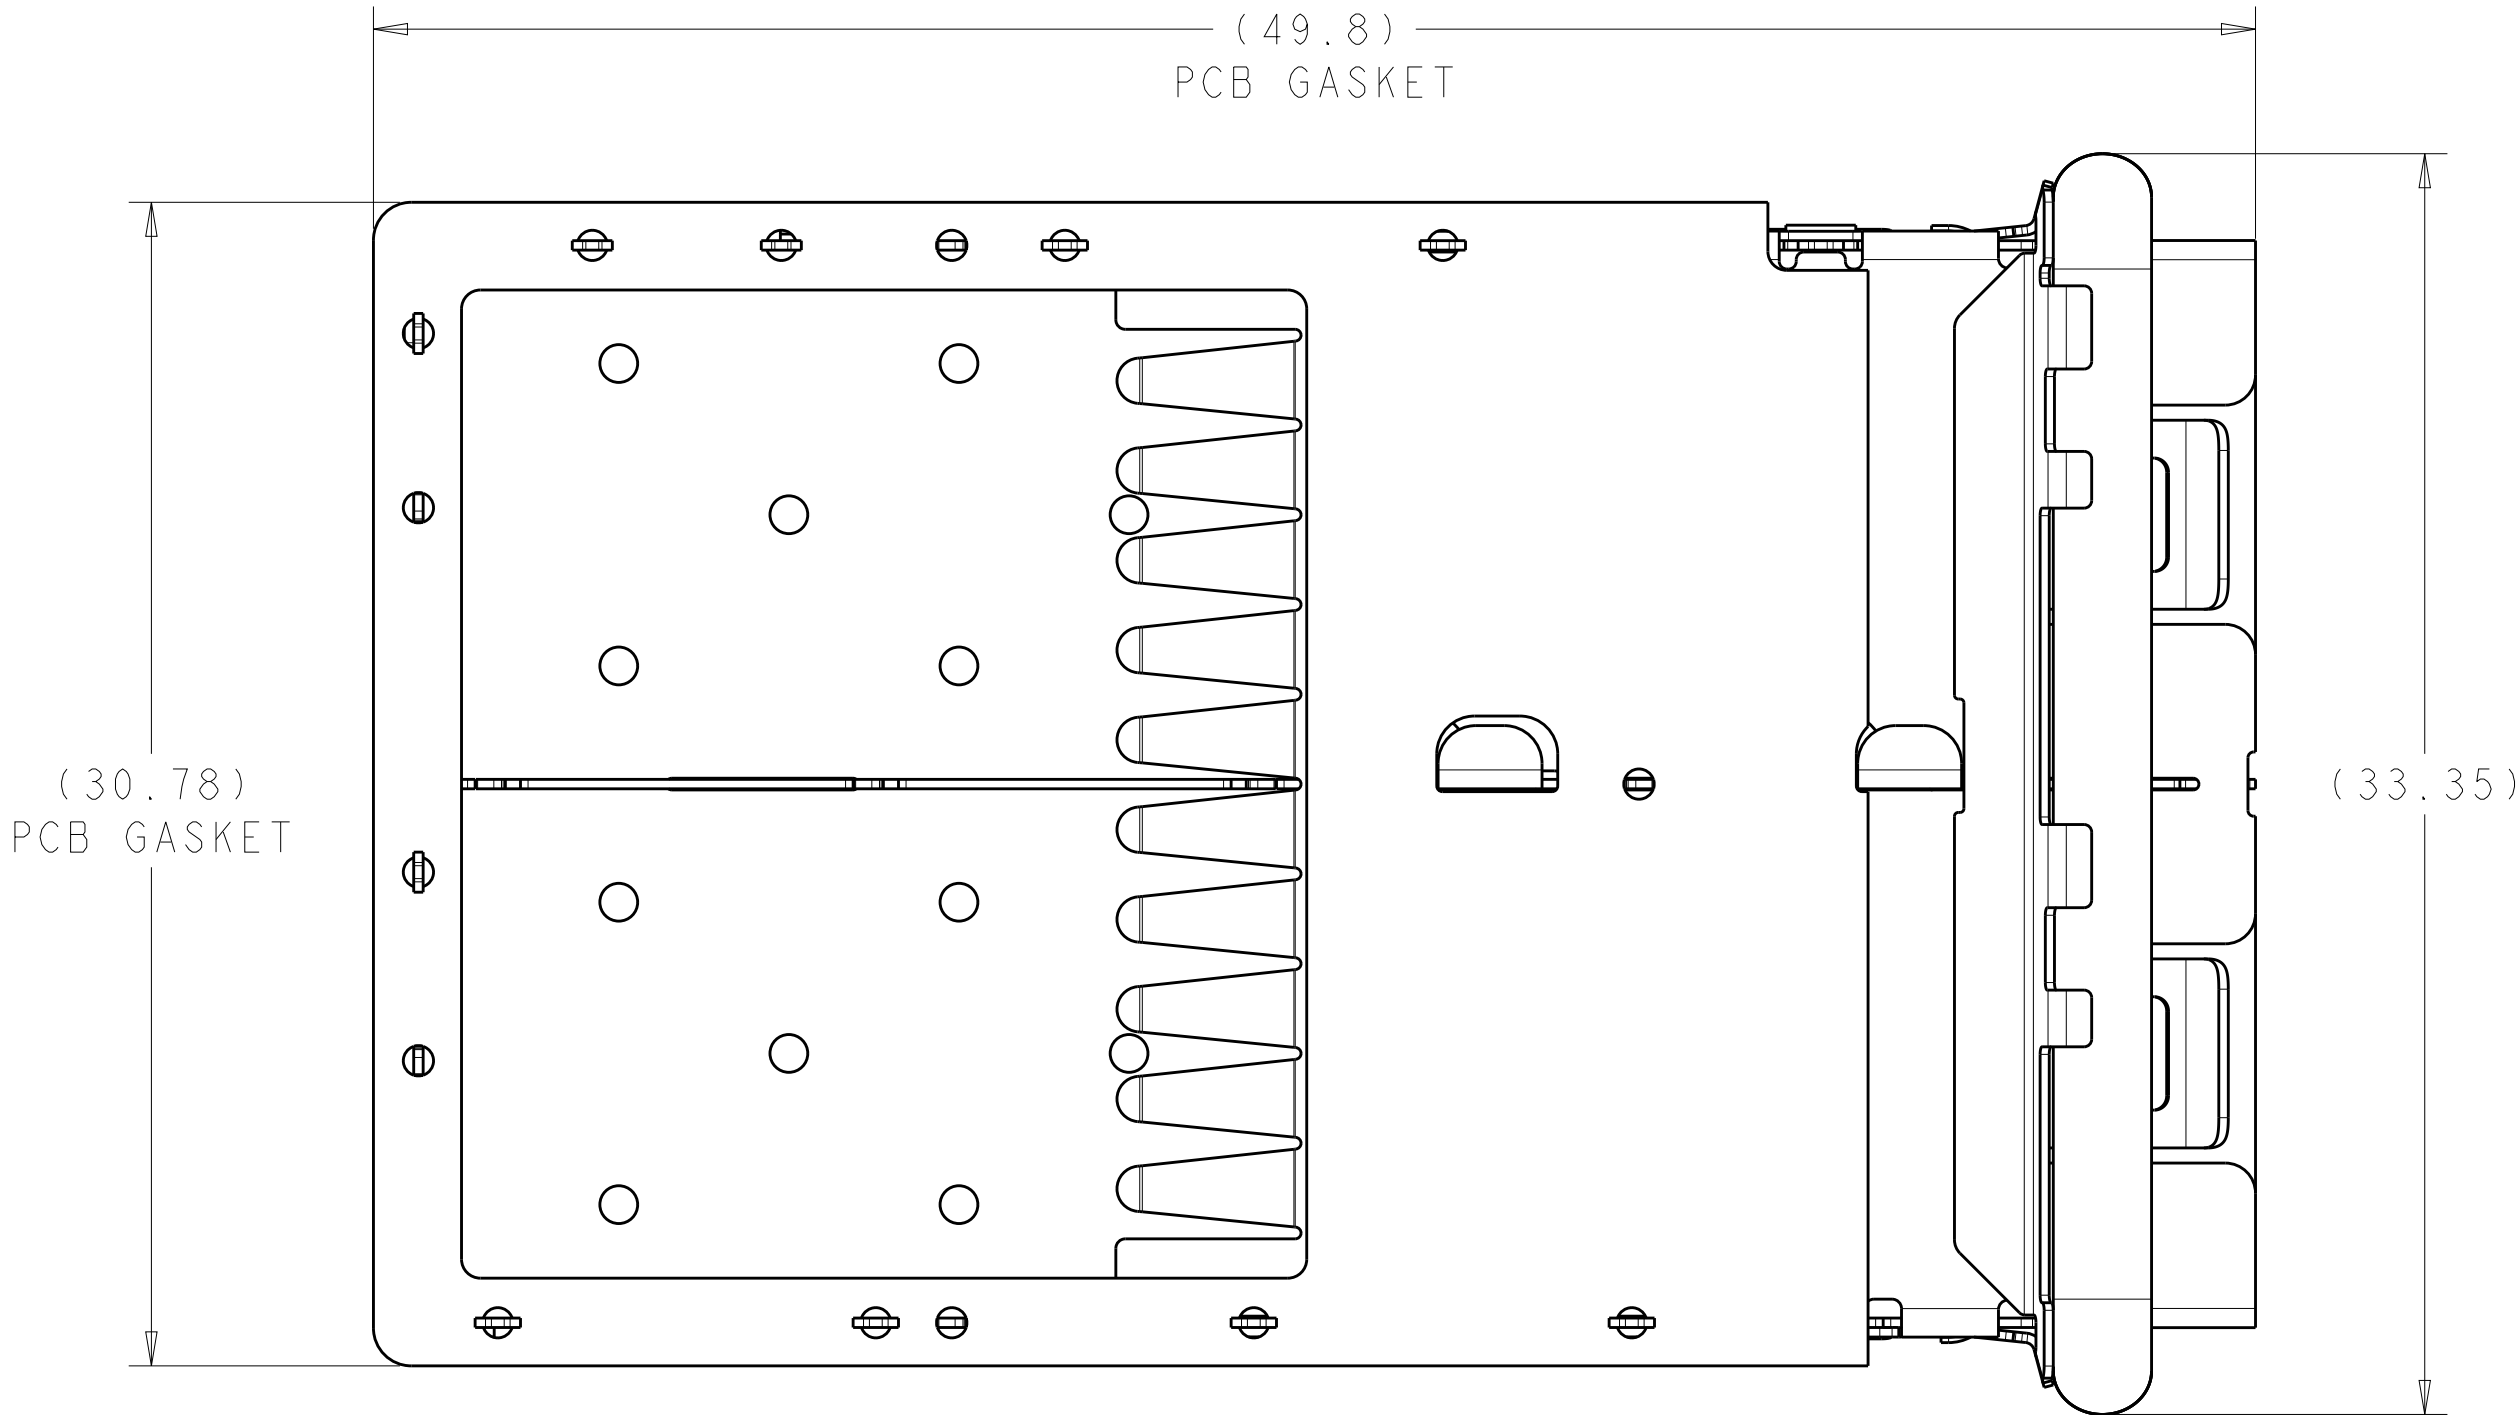


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	REVISED PER ECO-15-002647	05MAR2015	AP	MS
			B	REVISED PER ECO-16-014593	13FEB2017	JW	SH

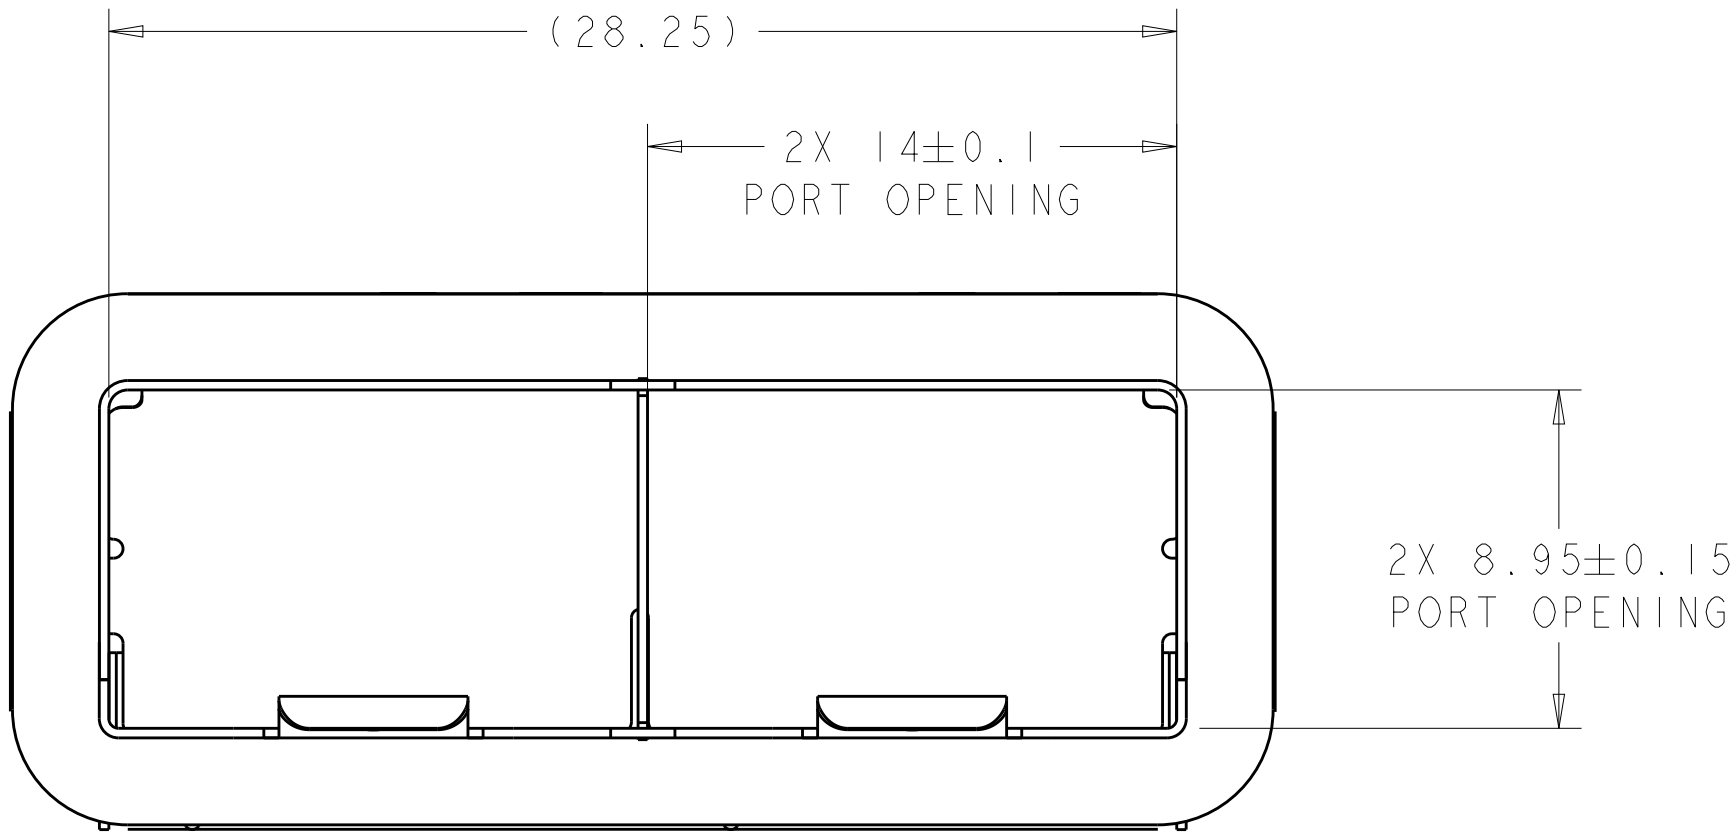

- MATERIAL:
CAGE ASSEMBLY: NICKEL SILVER ALLOY
GASKET RETENTION PLATE: STAINLESS STEEL
EMI GASKET: PLATED FILLED SILICONE
PCB GASKET: RF ABSORBER
- MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.45mm
BELLY TO BELLY = 3mm
- PADS AND VIAS CHASSIS GROUND
- DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER
- MATES WITH SFP MSA COMPLIANT TRANSCEIVERS
- INTERPRETATION OF DATUM REFERENCE FRAME IN ACCORDANCE WITH SECT 4.4.1.1 OF ASME Y14.5M-1994
- REFERENCE APPLICATION SPEC. 114-13120, HOLE A, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS
- REFERENCE APPLICATION SPEC. 114-13120, HOLE B, FOR RECOMMENDED DRILL HOLE DIAMETER AND PLATING THICKNESS
- HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm
- PRODUCT COMPLIES WITH SPECIFICATION SFF-8433, IMPROVED PLUGGABLE FORM FACTOR FOR SFP+ GANGED CAGES
- CONTACT STANDOFF WILL PIERCE GASKET WHEN PROPERLY PRESSED INTO PCB




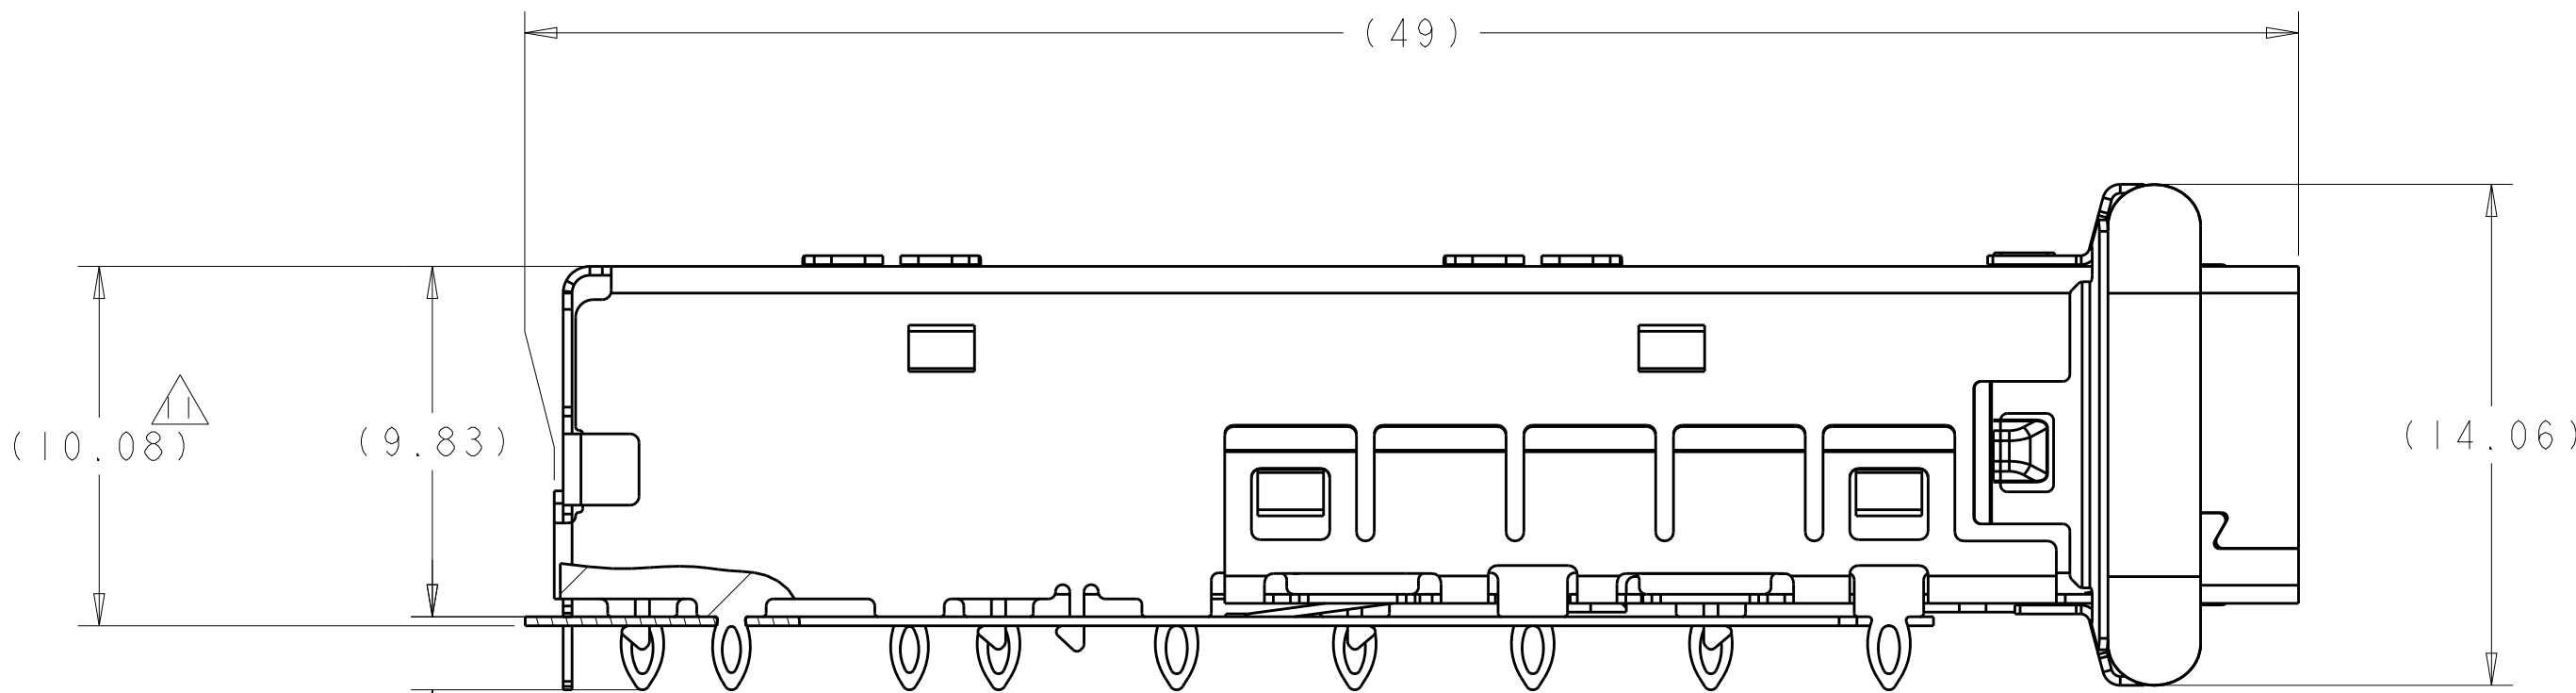


2198720-1


PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA 15AUG2012	TE Connectivity	
DIMENSIONS:		CHK H. HENRY 15AUG2012		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. J. PHILLIPS	NAME	CAGE ASSEMBLY, ENHANCED, PRESS-FIT, 1X2, zSFP+
	0 PLC	±0.25	PRODUCT SPEC	-
	1 PLC	±0.25	108-2364	-
	2 PLC	±0.25	APPLICATION SPEC	-
	3 PLC	±0.25	114-13120	-
MATERIAL SEE NOTE 1	4 PLC	±0.25	SIZE	CAGE CODE
	ANGLES	±X°	DRAWING NO	RESTRICTED TO
FINISH		WEIGHT	A100779C=2198720	-
Customer Drawing		SCALE	8:1	SHEET 1 OF 4
		REV	B	


LOC		DIST		REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-	-	SEE SHEET 1	-	-	-	

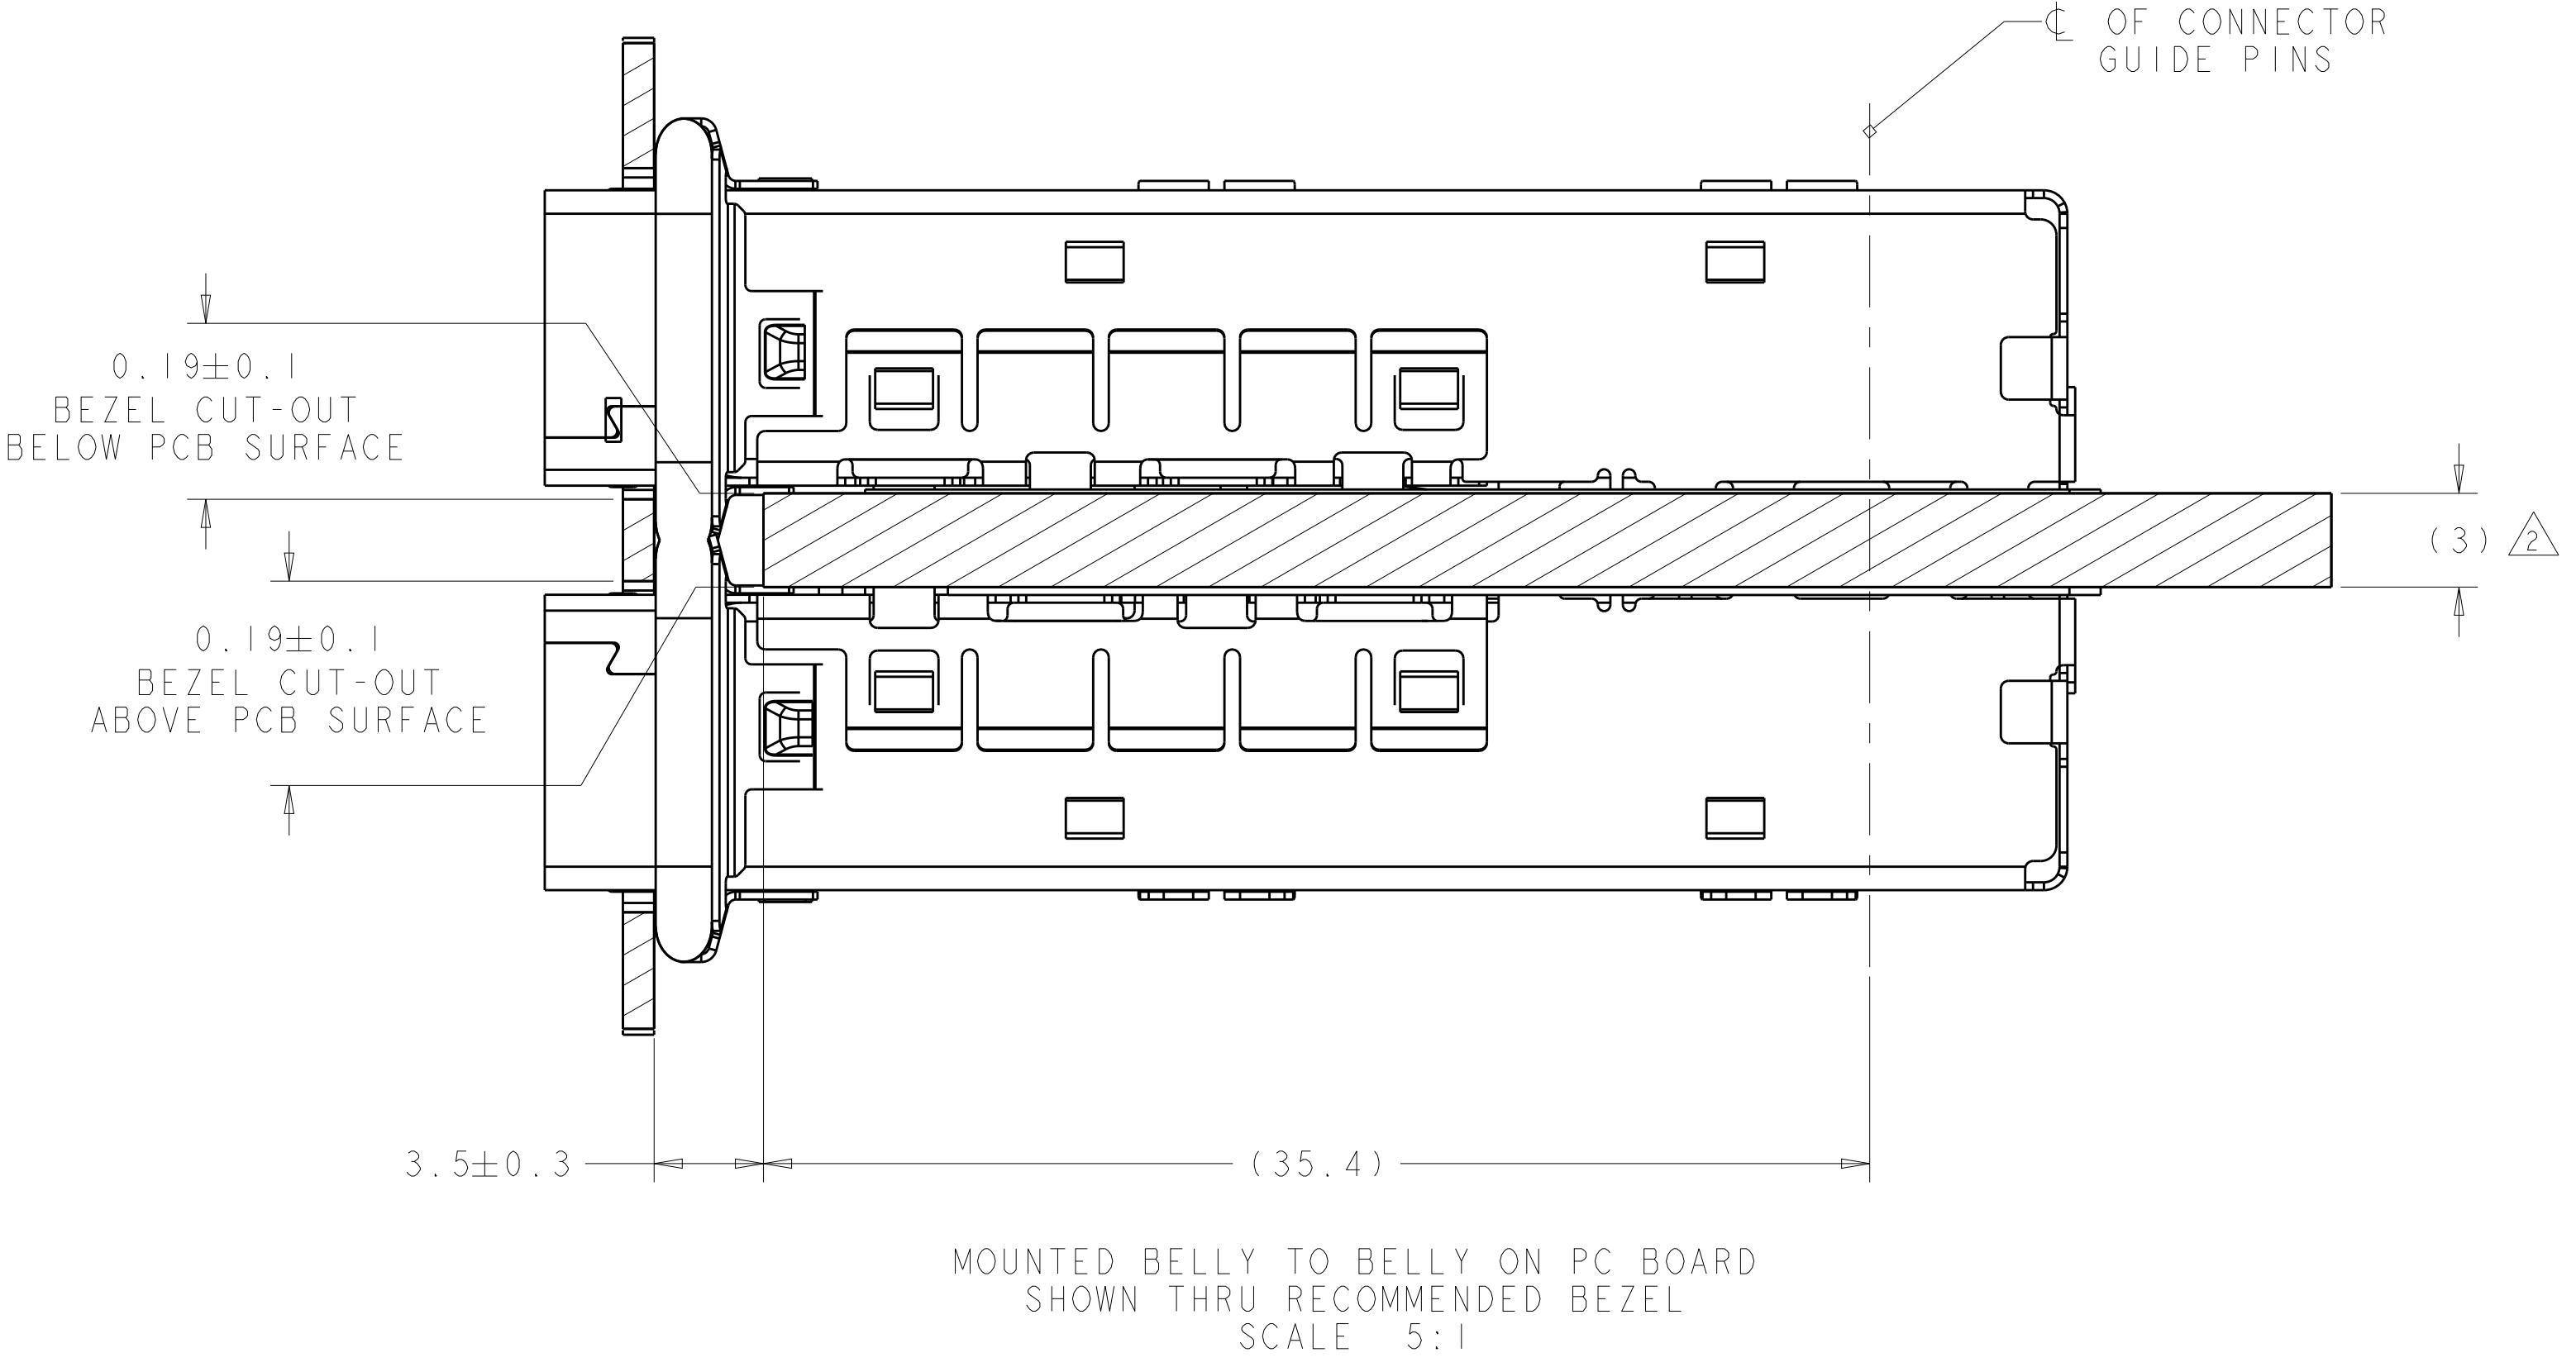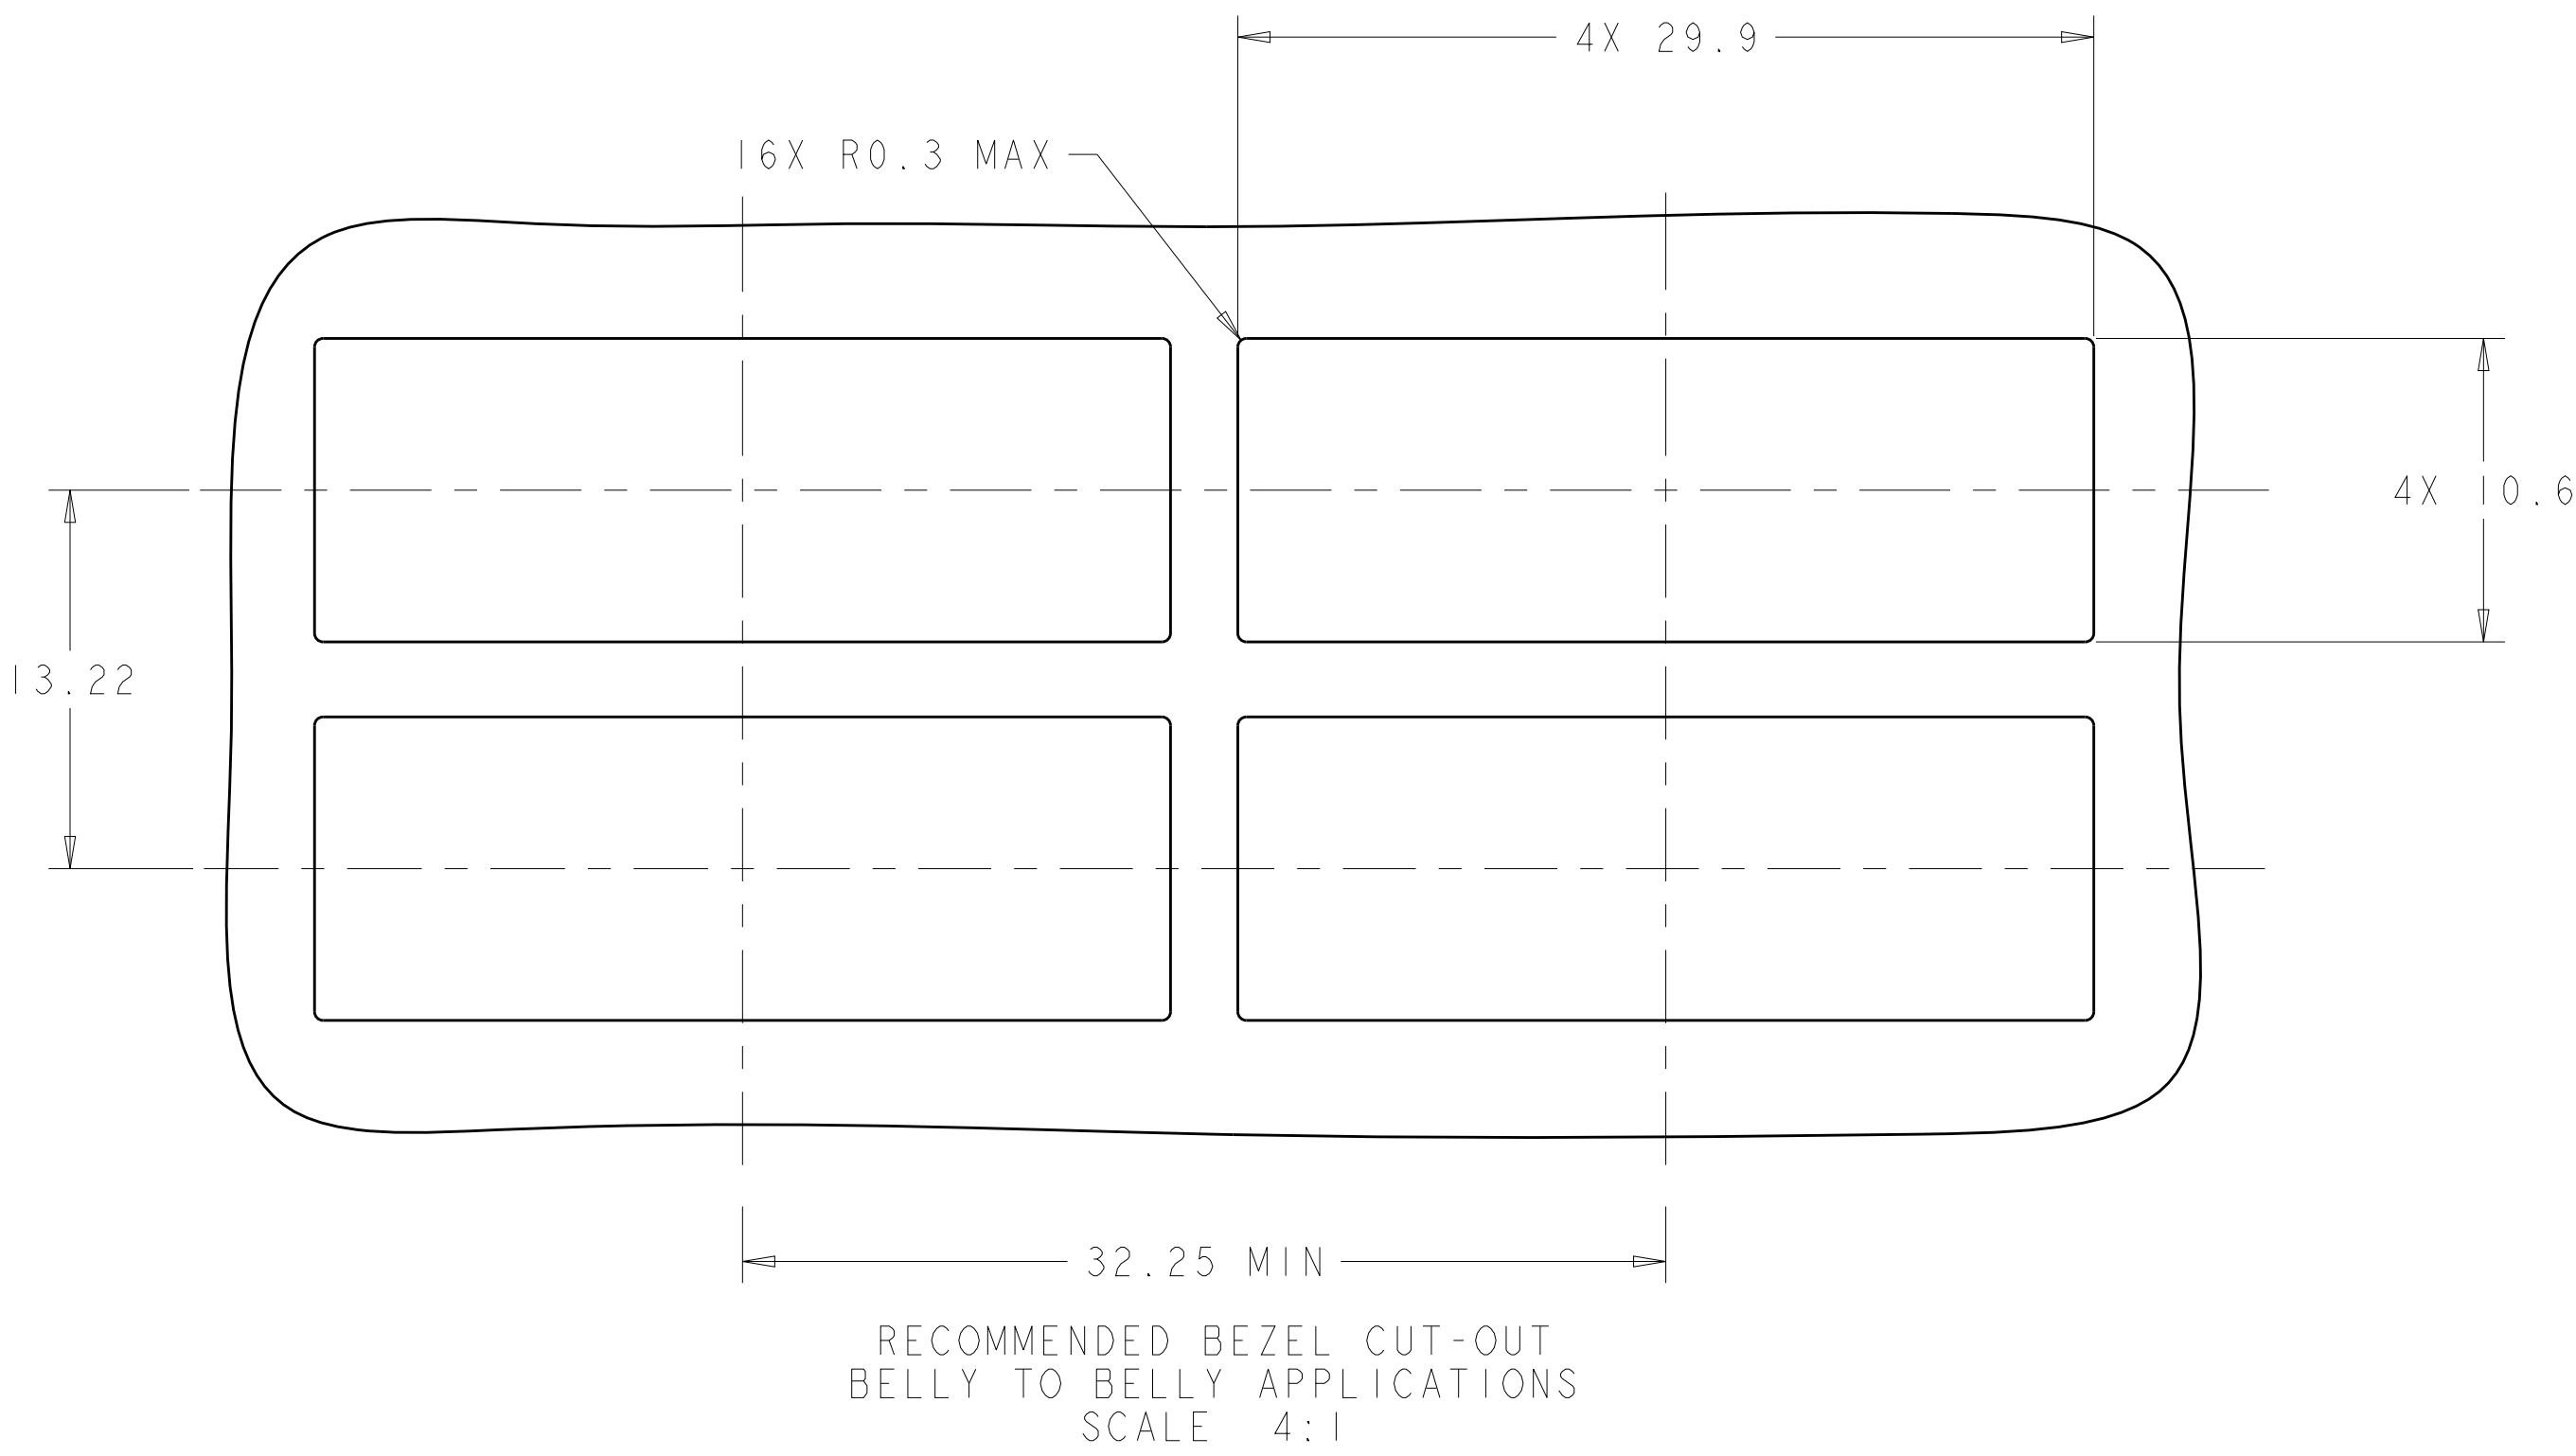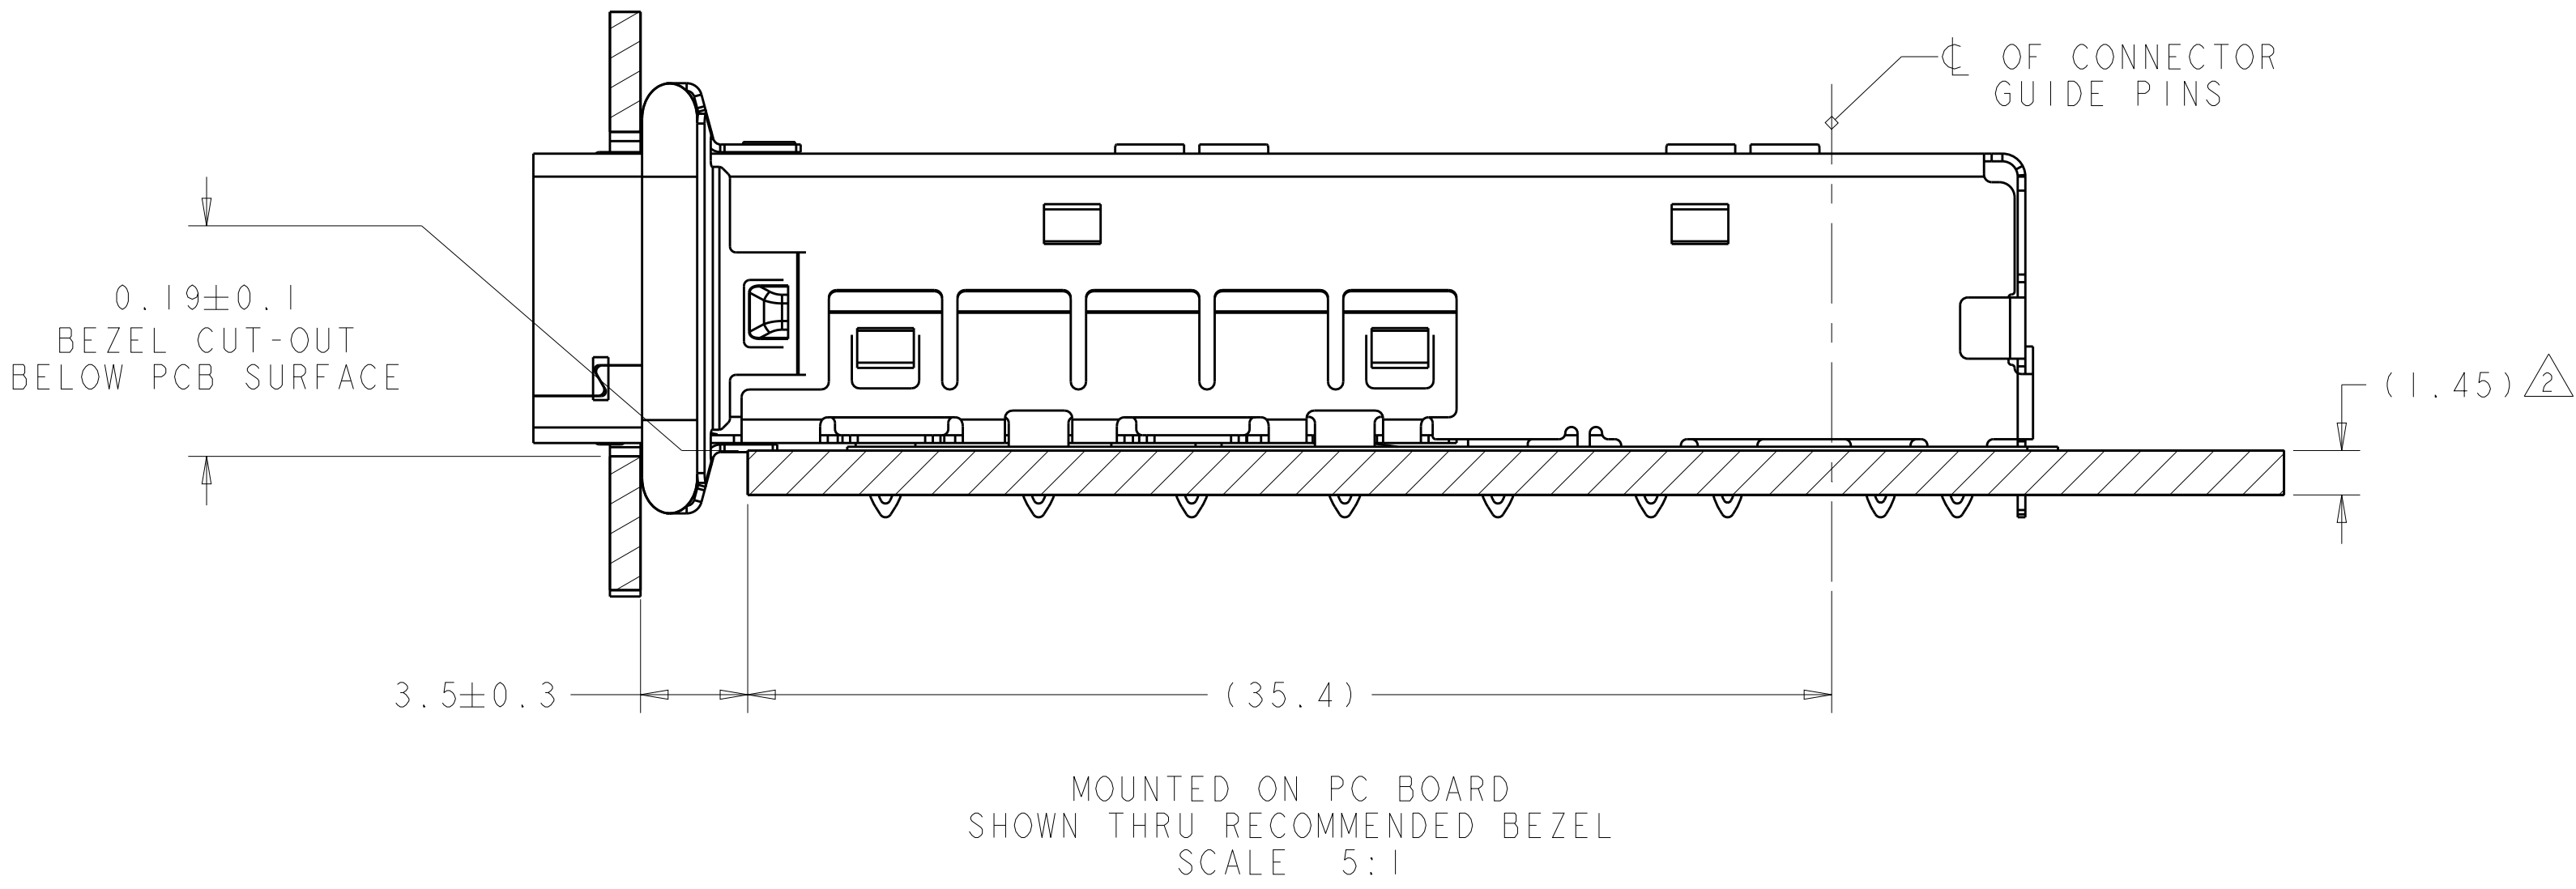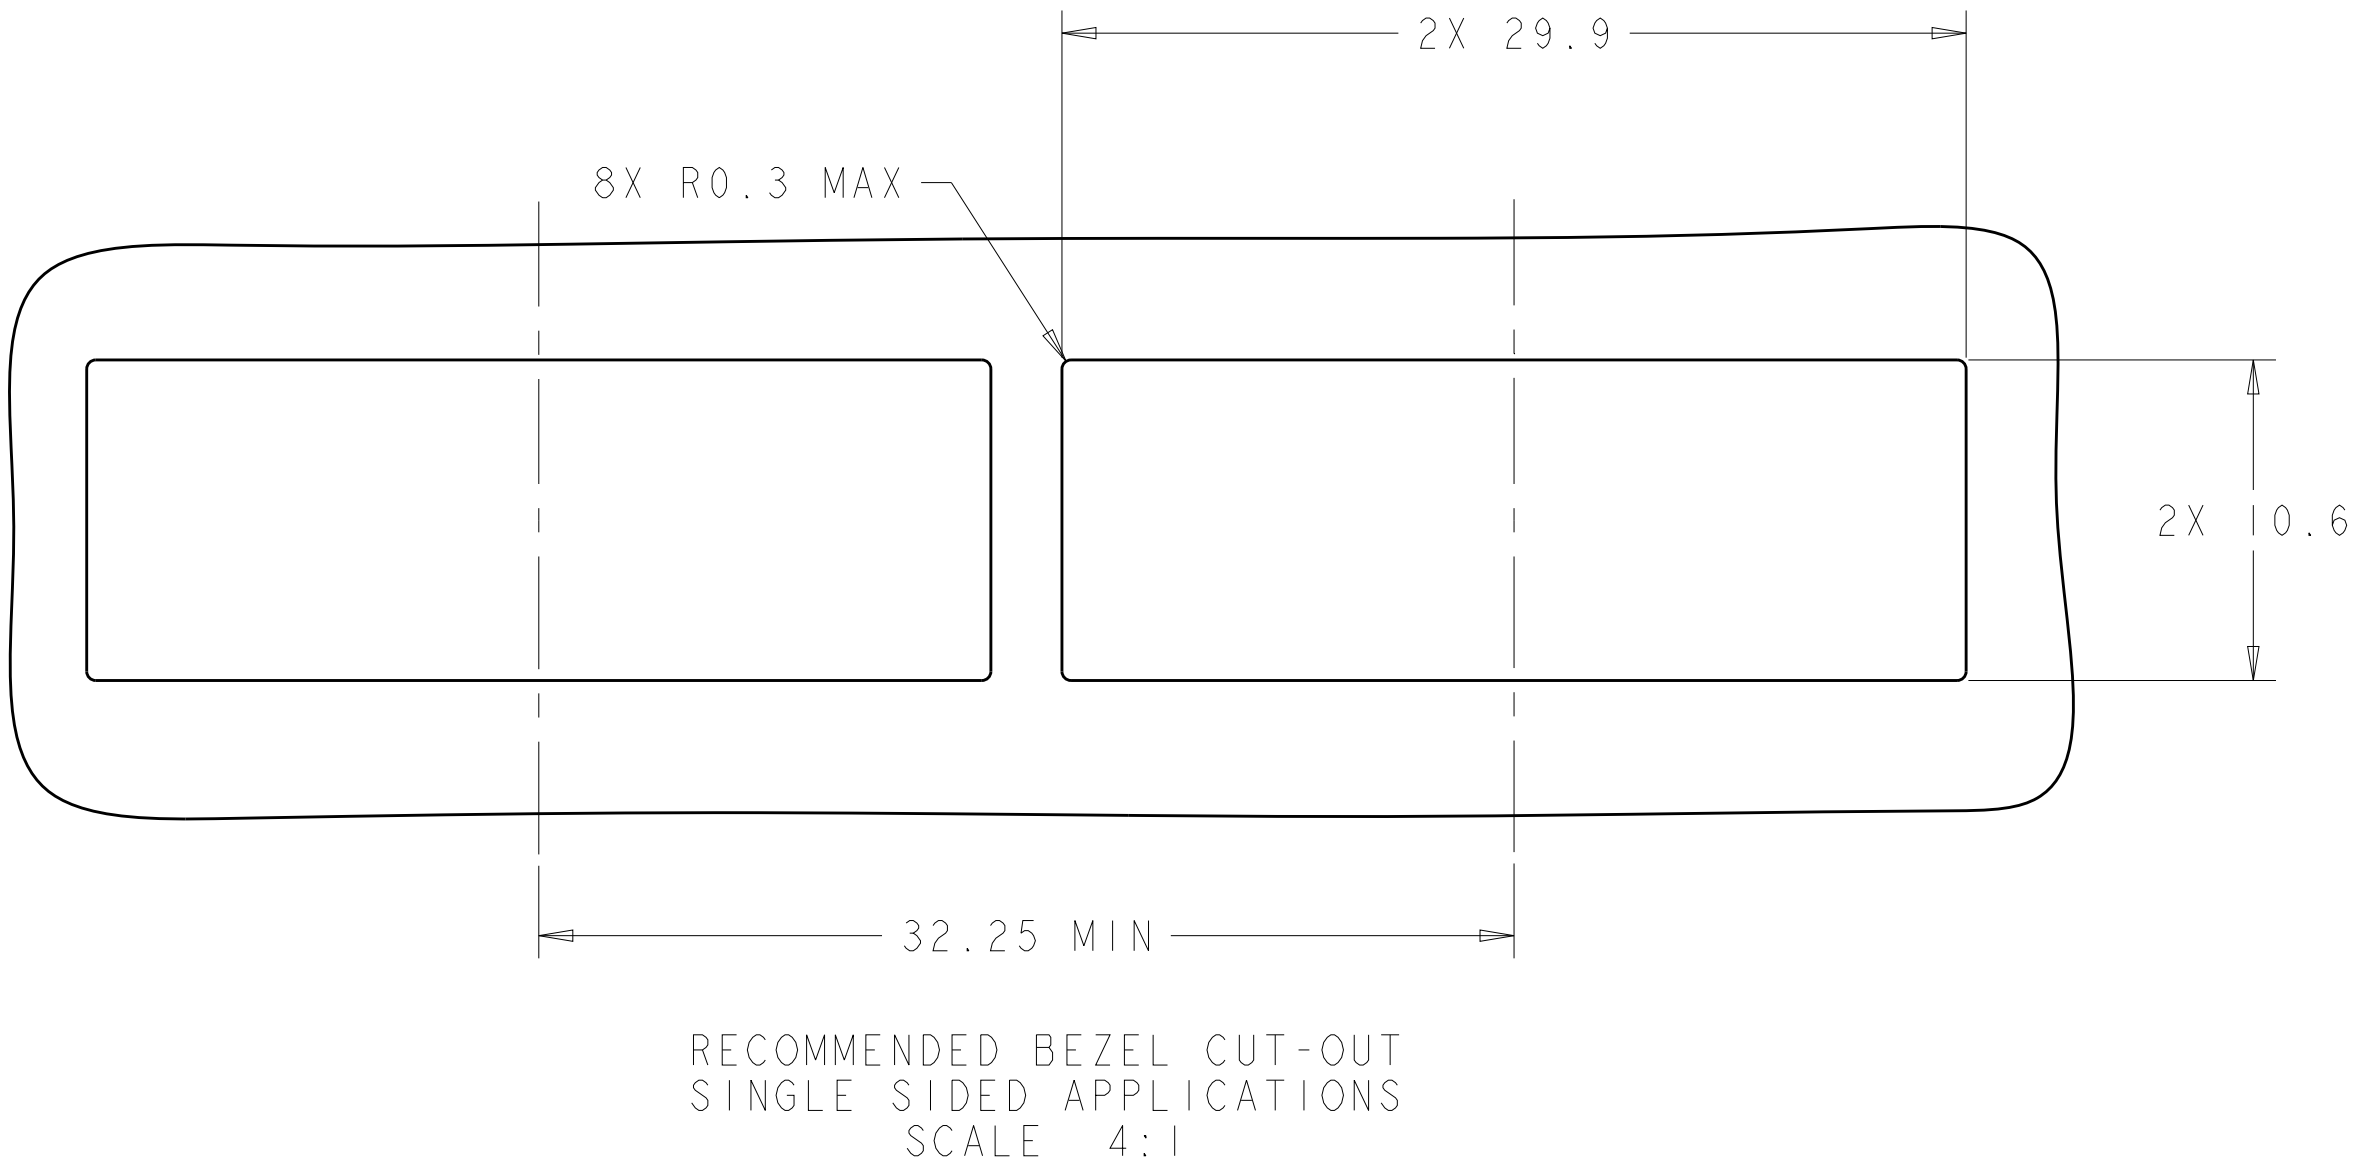

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA 15AUG2012	TE Connectivity	
DIMENSIONS:		CHK H. HENRY 15AUG2012		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. J. PHILLIPS	NAME	CAGE ASSEMBLY, ENHANCED, PRESS-FIT, 1X2, zSFP+
	0 PLC ±0.1	PRODUCT SPEC	SIZE	108-2364
	1 PLC ±0.1	APPLICATION SPEC	CAGE CODE	114-13120
MATERIAL SEE NOTE 1	2 PLC ±0.08	WEIGHT	DRAWING NO	A100779C=2198720
	3 PLC ±0.05	Customer Drawing	SCALE	6:1
			SHEET	2 OF 4
			REV	B

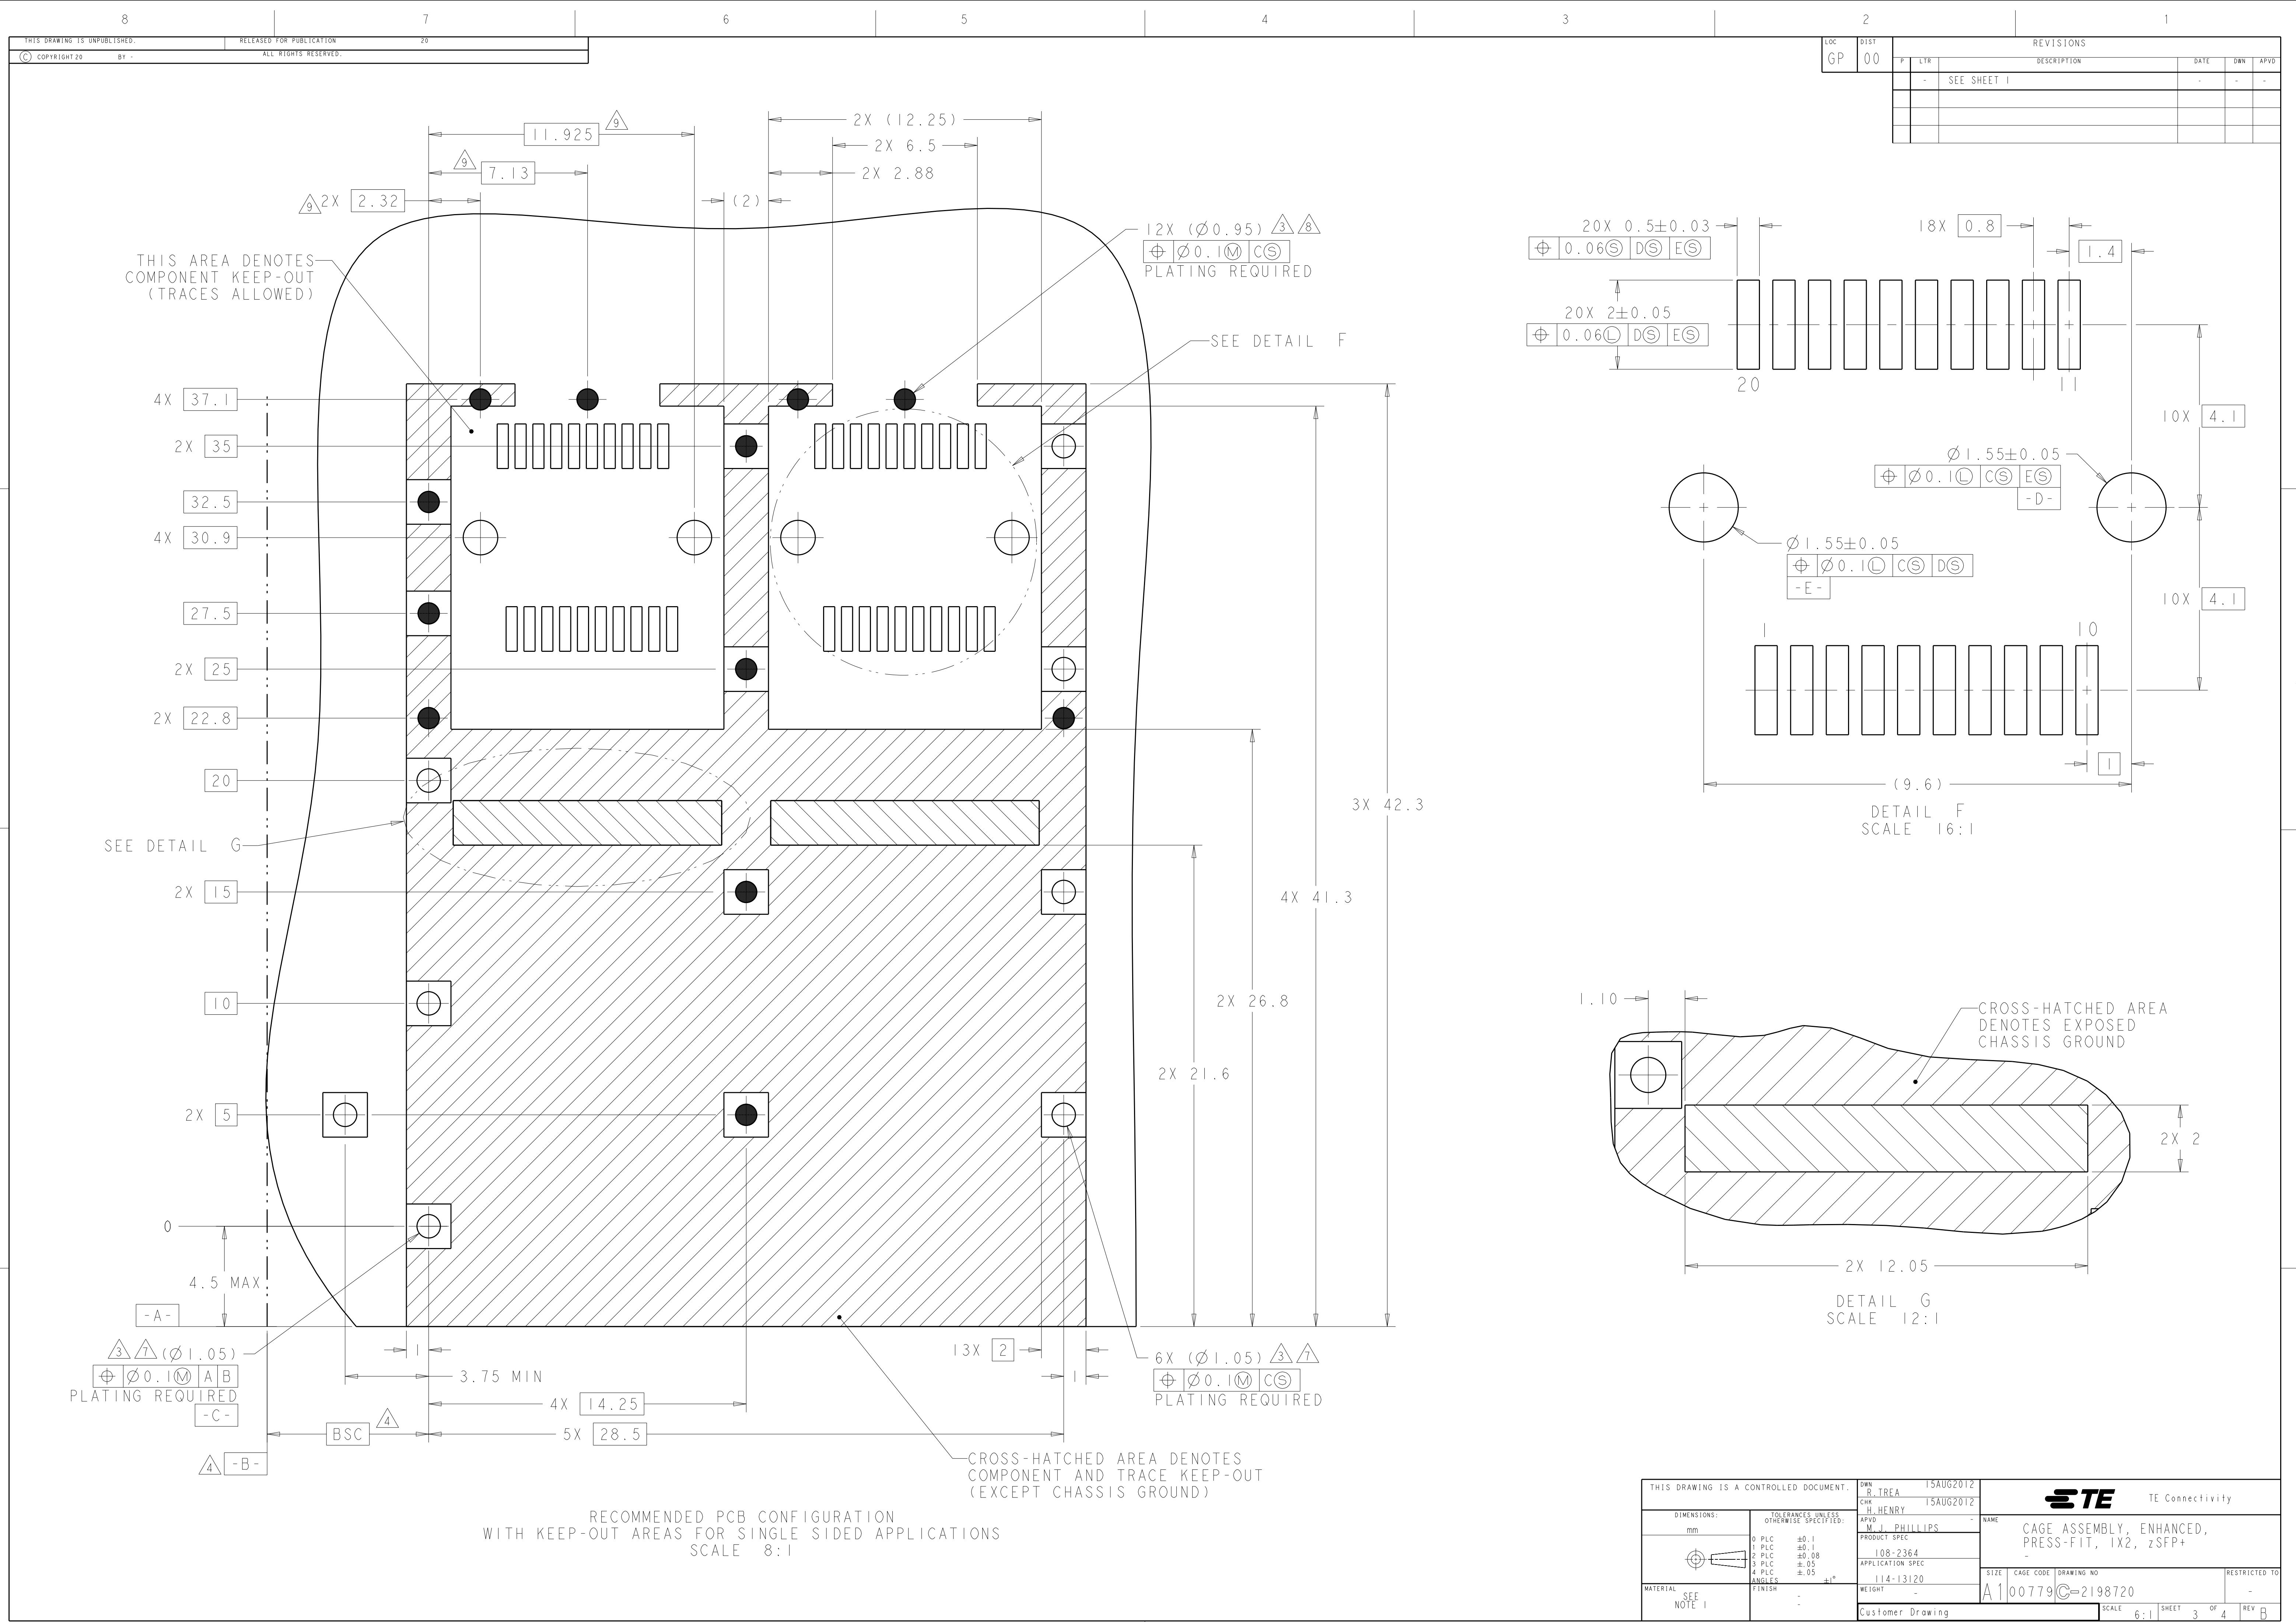

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
GP	00	-	-	SEE SHEET 1	-	-

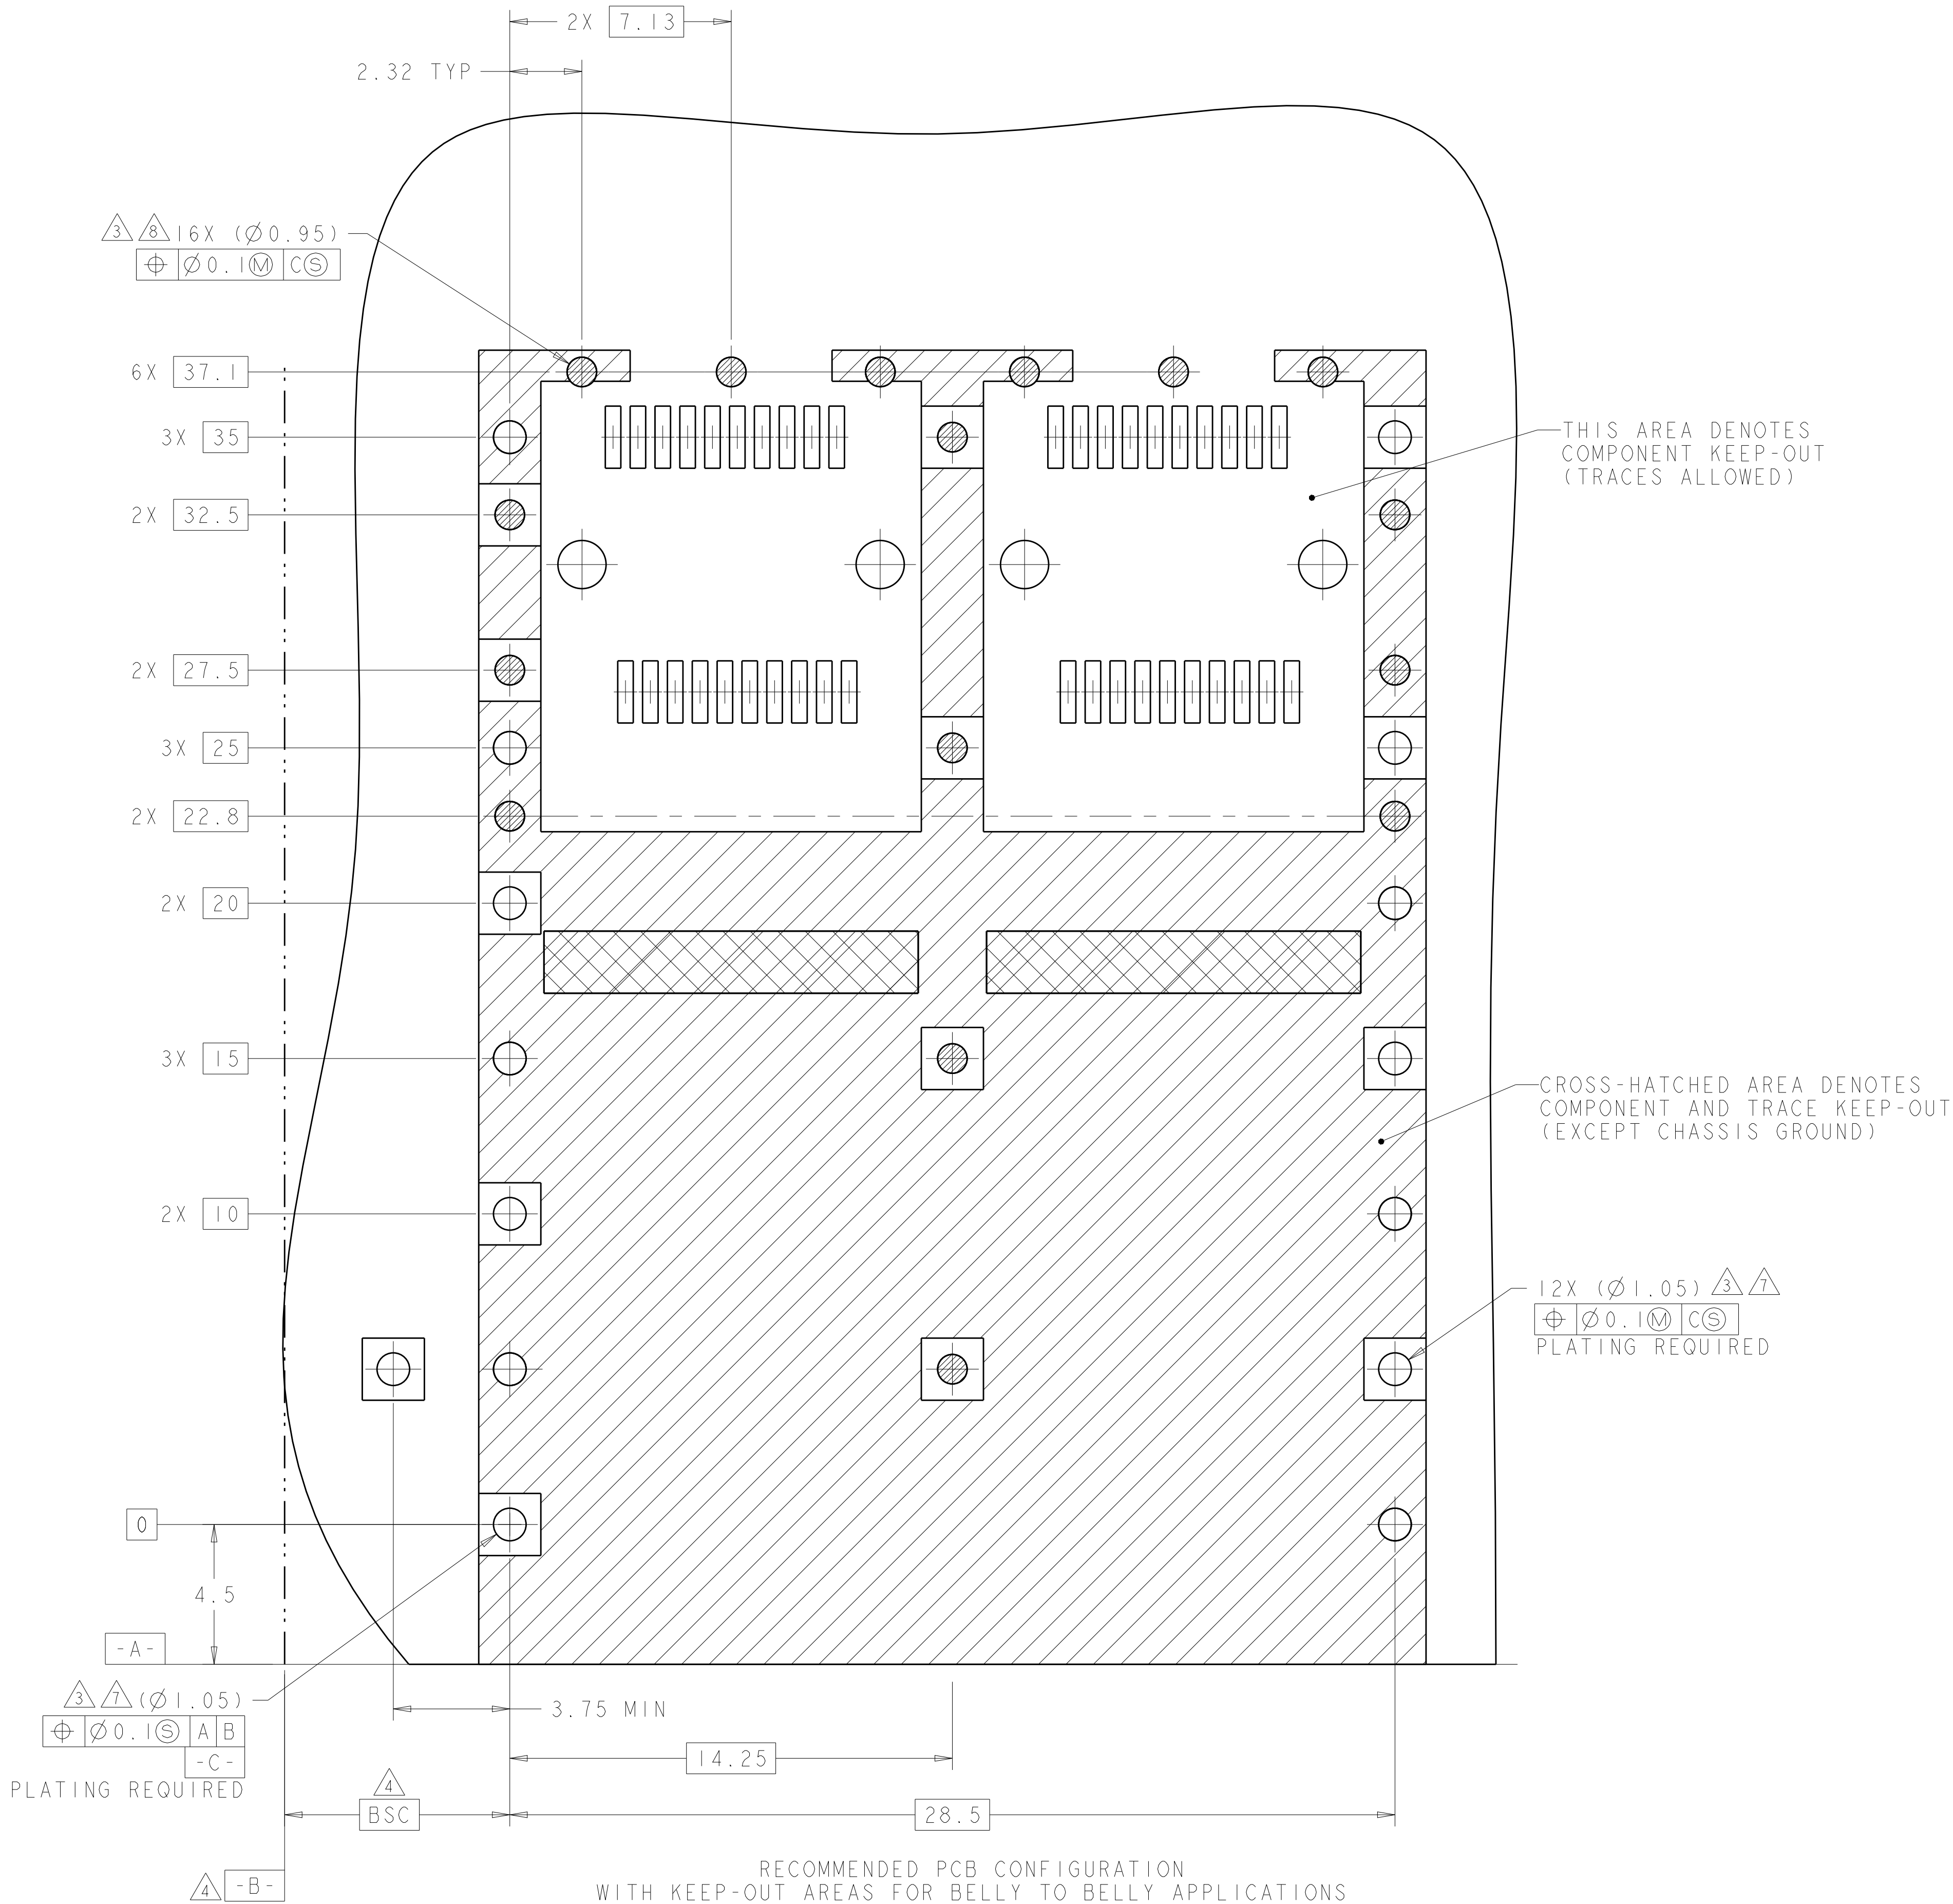

RECOMMENDED PCB CONFIGURATION
WITH KEEP-OUT AREAS FOR BELLY TO BELLY APPLICATIONS
SAME AS SINGLED SIDED APPLICATION, EXCEPT AS SHOWN
SCALE 8:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. TREA 15AUG2012	TE Connectivity	
DIMENSIONS:		CHK H. HENRY 15AUG2012		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. J. PHILLIPS	NAME	CAGE ASSEMBLY, ENHANCED, PRESS-FIT, 1X2, zSFP+
	0 PLC ±0.1	PRODUCT SPEC	SIZE	108-2364
	1 PLC ±0.1	APPLICATION SPEC	CAGE CODE	114-13120
	2 PLC ±0.08	WEIGHT	DRAWING NO	2198720
	3 PLC ±0.05	Customer Drawing	RESTRICTED TO	-
MATERIAL SEE NOTE 1	FINISH -	SCALE 6:1	SHEET 4	OF 4
		REV B		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2198720-1](#)