


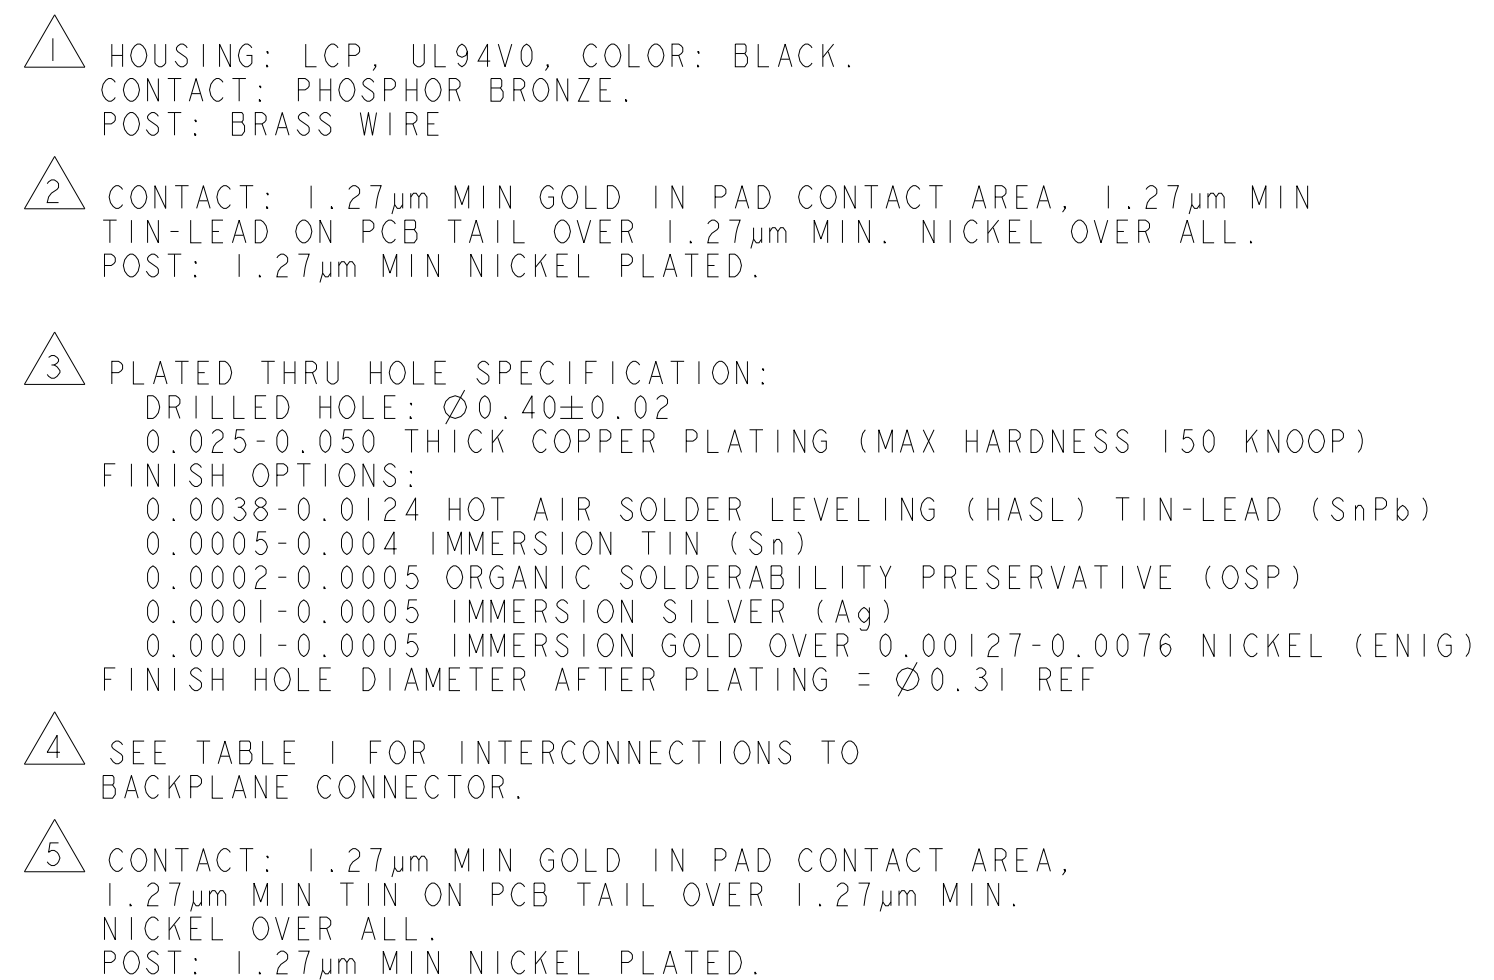


TABLE I
INTERCONNECTIONS WITH BACKPLANE CONNECTOR 21302788

TYPICAL INTERCONNECTIONS FOR ODD COLUMN (WAFER): 1, 3, 5, 7		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	a x	a x
	b x	b x
SIGNAL PAIR	d x	e x
	e x	f x
SIGNAL	g x	i x
GROUND	c x, f x (ALL COMMONED)	c x, d x, g x, h x

TYPICAL INTERCONNECTIONS FOR EVEN COLUMN (WAFER): 2, 4, 6, 8		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	b x	c x
	c x	d x
SIGNAL PAIR	e x	g x
	f x	h x
GROUND	a x, d x, g x, (ALL COMMONED)	a x, b x, e x, f x, i x

NOTE: "x" DESIGNATES THE COLUMN NUMBER

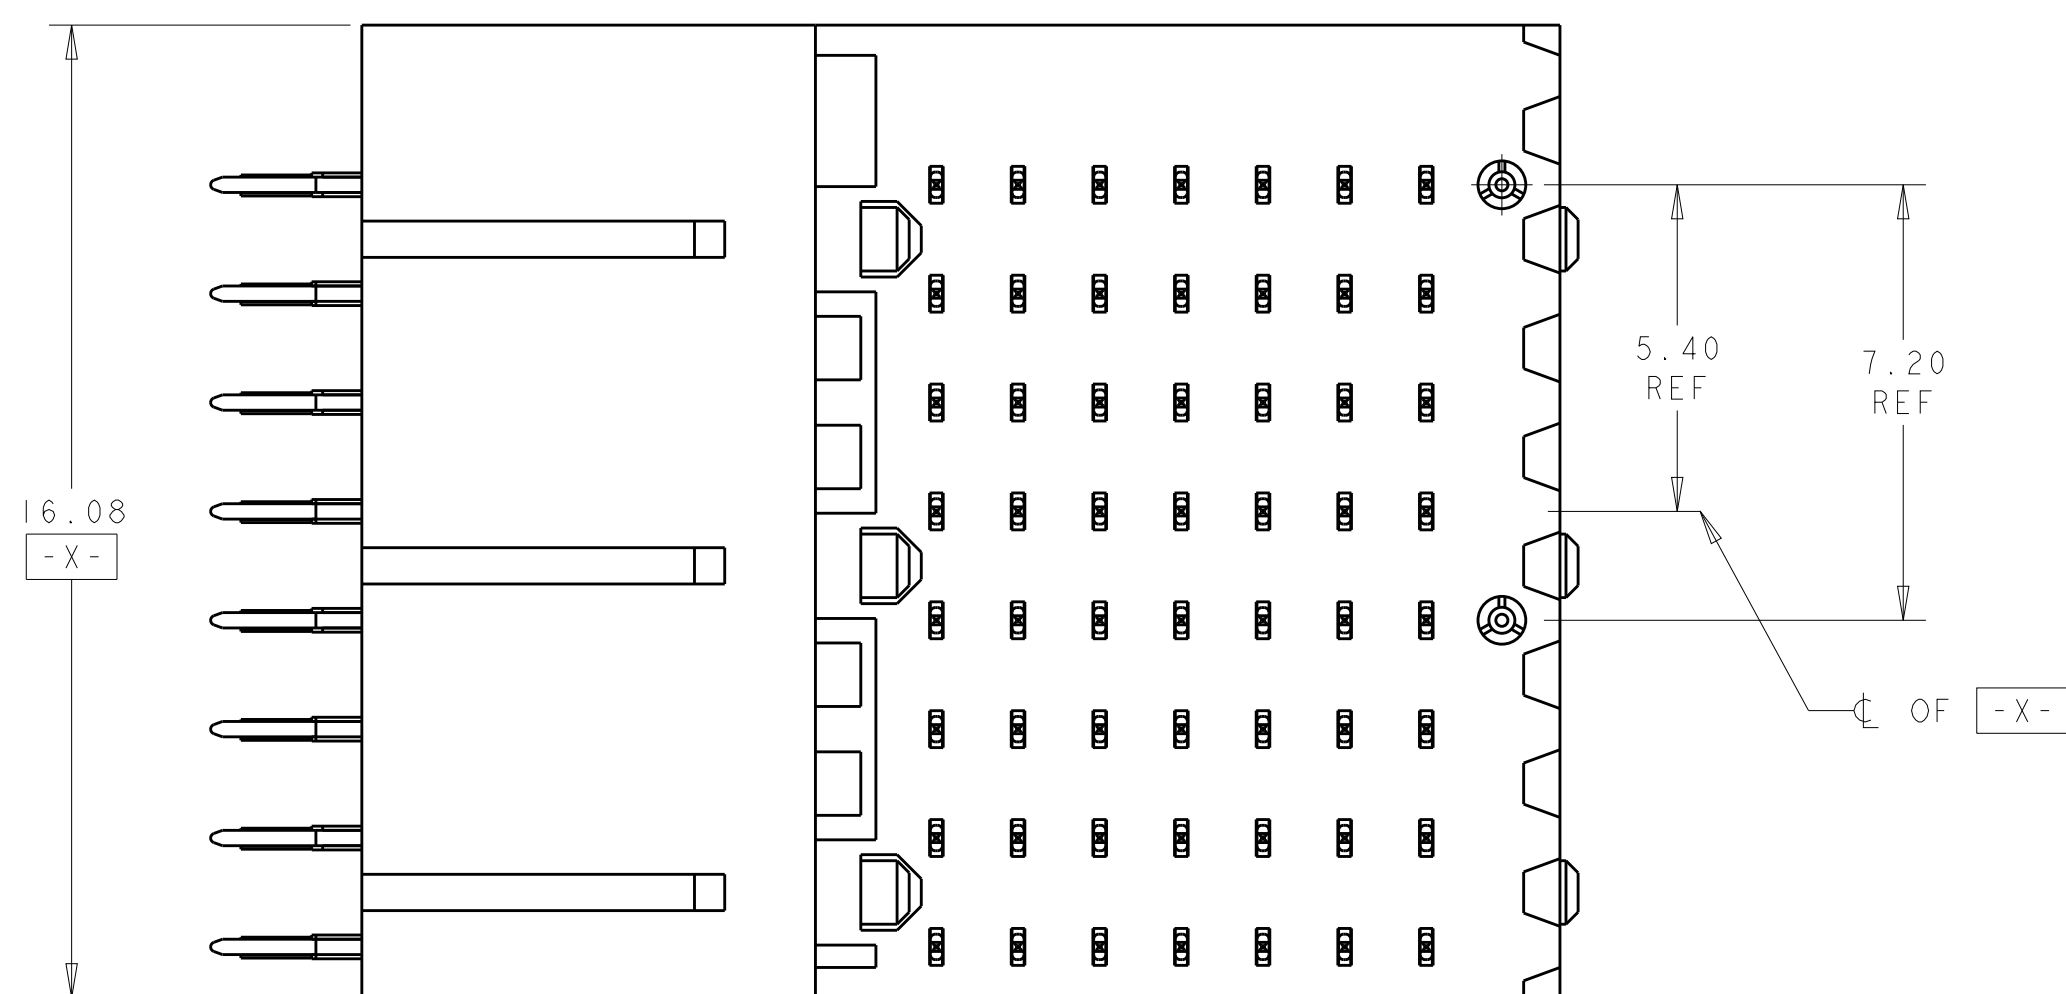

	2302796-2
	2302796-1
PLATING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 11JUL2017 CHK K. MILLER 11JUL2017 A. TSANG		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±1°0'		NAME RIGHT-ANGLE PLUG ASSY, 7 ROW, HALF LEFT END, DIFFERENTIAL, RTM, MULTIGIG RT 3	
		PRODUCT SPEC 108-2072-3 APPLICATION SPEC 114-163004		SIZE A1	
MATERIAL 		FINISH SEE TABLE		CAGE CODE C2302796	
		WEIGHT 5.41g		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2302796-2](#)