
JMGST-5MW 🗸 ACTIVE

CII

TE Internal #: 1-1617110-9 TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 5VDC TO-5/.100 Grid Relay Input Voltage, Coil Suppression Diode, MOSFET Driver View on TE.com >



Relays, Contactors & Switches > Relays > Mil-Aero Relays > TO-5/.100 Grid Relays



TO-5/.100 Grid Relay Contact Arrangement: **2 Form C, DPDT, 2 C/O**

TO-5/.100 Grid Relay Input Voltage: 5 VDC

Coil Suppression Diode: With

MOSFET Driver: With

Transistor Driver: Without

Features

Product Type Features

Enclosure Type	Hermetically Sealed
Relay Туре	Military/Aerospace High Performance
Coil Latching	Without

Product Type	Relay
MOSFET Driver	With
Configuration Features	
Transistor Driver	Without
Electrical Characteristics	
Coil Magnetic System	Non-Polarized, Monostable
Vibration	30G's, 10 – 3000Hz
Actuating System	DC
Shock	75G's, 6ms
Coil Power Measurement	Milliwatts
TO-5/.100 Grid Relay Input Voltage	5 VDC
Coil Suppression Diode	With
Coil Voltage	5 VDC
TO-5/.100 Grid Relay Coil Resistance	100 Ω
TO-5/.100 Grid Relay Coil Power Rating (DC)	250 mW

TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 5VDC TO-5/.100 Grid Relay Input Voltage, Coil Suppression Diode, MOSFET Driver



Coil Polarity Protection Diode	With
TO-5/.100 Grid Relay Contact Switching Voltage (Max)	28
Contact Features	
Contact Current Class	Low Level – 1 A
Pin Configuration	.175" Diameter Mounting Pad
TO-5/.100 Grid Relay Contact Arrangement	2 Form C, DPDT, 2 C/O
TO-5/.100 Grid Relay Contact Current Rating	1 A
Termination Features	
Termination Type	PC Pins
Mechanical Attachment	
TO-5/.100 Grid Relay Mounting Type	Printed Circuit Board
Usage Conditions	
Operating Temperature Range	-65 – 125 °C
Product Compliance For compliance documentation, visit the product page on TE.com>	

EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2021 (219) Candidate List Declared Against: JAN 2021 (211) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Calalar Draacaa Canalailitu	

Solder Process Capability

EU RoHS Directive 2011/65/EU

Not lead free process capable

Not Compliant

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 5VDC TO-5/.100 Grid Relay Input Voltage, Coil Suppression Diode, MOSFET Driver



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

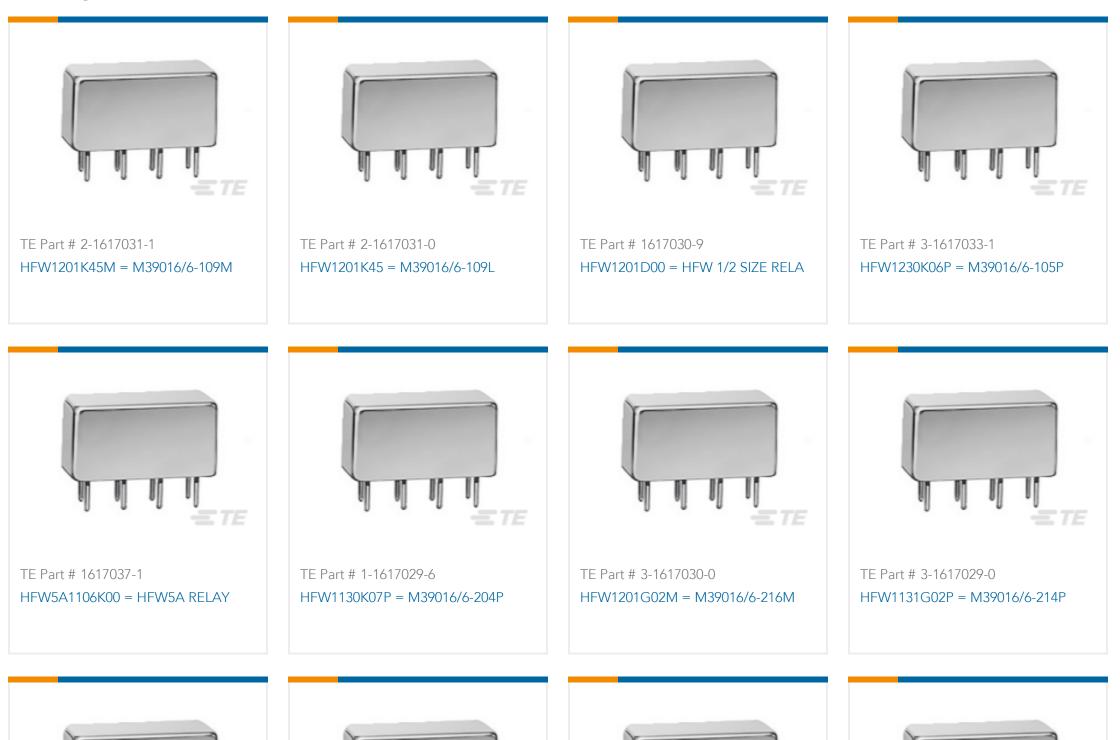



TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 5VDC TO-5/.100 Grid Relay Input Voltage, Coil Suppression Diode, MOSFET Driver





Customers Also Bought



TE Part #3-1617031-5

5418-10-130508



Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1617110-9_O.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1617110-9_O.3d_igs.zip

English

C For support call+1 800 522 6752

TO-5/.100 Grid Relays, 2 Form C, DPDT, 2 C/O, 5VDC TO-5/.100 Grid Relay Input Voltage, Coil Suppression Diode, MOSFET Driver



Customer View Model

ENG_CVM_CVM_1-1617110-9_O.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 5-1773450-5_sec1_MGST

English

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1-1617110-9</u>