



1

2

3

4

5

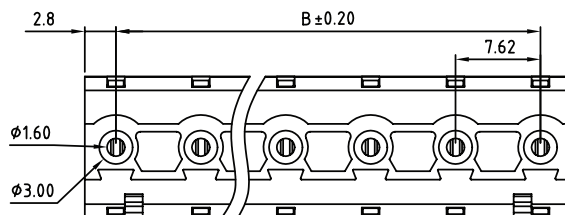

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW: STEEL ZINC PLATING
TERMINAL SCREW SLOT TYPE: "-"
WIRE GUARD: PhBz TIN PLATED

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 15 A
WORKING VOLTAGE: 300 VAC
WITHSTANDING VOLTAGE: 1.6 KV
CONTACT RESISTANCE: 20 mOhm max


STANDARD
cULus CERTIFIED E315414

MECHANICAL
SOLID WIRE: 24-12 AWG / 0.205-3.31 MM²
STRANDED WIRE: 24-12 AWG / 0.205-3.31 MM²
TORQUE: 4.3 Lb-In / 0.49 Nm



WIRE STRIPE LENGTH: 6-7 MM
SCREW: M3.0
PITCH: 7.62 MM

PACKAGING
BOX

DIMENSION
A = (NB. PINS - 1) x PITCH
B = (NB. PINS x PITCH) - 2.02



SECTION A-A

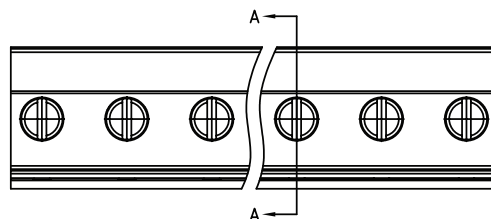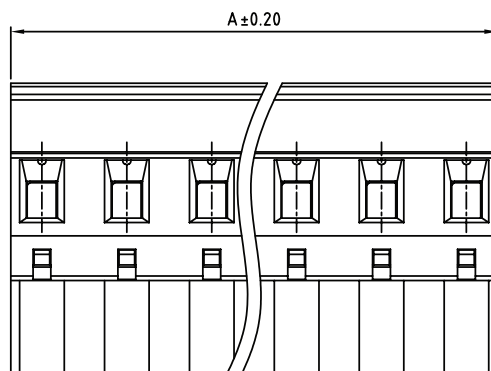

RoHS Compliant

PROJECTION:



GENERAL TOLERANCE

.X = ± 0.2 .XX = ± 0.15 

APPROVAL: FBr

UNIT: MM

SCALE:

SHEET: 1/2


DRAW: MARVIN

DESCRIPTION: SERIE 3444 - 7.62MM HORIZONTAL CABLE ENTRY PLUG
WITH HOOK ON BACK SIDE - WR-TBL

WERI PART NO: 691 344 410 0xx

SIZE

A4

1				2				3				4				5				
Cautions and Warnings: This electronic component is designed and developed with the intention for use in general electronics equipments. Before incorporating the components into any equipments in the field such as aerospace, aviation, nuclear control, submarine, transportation, (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required or if there is possibility of direct damage or injury to human body, Würth Elektronik must be asked for a written approval. In addition, even electronic component in general electronic equipments, when used in electrical circuits that require high safety, reliability functions or performance, the sufficient reliability evaluation-check for the safety must be performed before by the user before usage.																	A			
																	B			
																	C			
																	D			
RoHS Compliant								PROJECTION:				GENERAL TOLERANCE								
G								.X = +/- 0.2 .XX = +/- 0.15												
F																				
E																				
D																				
C				APPROVAL: JC				UNIT: MM				DESCRIPTION: DISCLAIMER				SIZE				
B								SCALE:				WERI PART NO: DISCLAIMER				A4				
A	10-SEP-14	PDF	QL																	
REV	DATE	FILE	BY																	
								DRAW: QL												

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Elektronik:](#)

[691344410005](#)