

DAS Above-Ceiling Antenna Holder Resilient Antenna Support

Part# DASACHOLDER





Features

- Plastic to eliminate PIM concerns
 - · Metal bracket isolated from rails.
- Easy installation to Ceiling Tile rails
 - Allows tile movement
 - Allows Access, Inspection
- 2.4 inch clearance
- Attaches to variety of antenna types
 - SISO, MIMO
- Strong, reliable connection. Antenna won't move under inadvertent force.

Applications

- DAS In-building installations
- Ideal for Sites in which visual impact is more important than antenna performance.
- Will not instigate PIM
- Fits over standard ceiling tiles.
- Optimized for use with Pulse DAS in-building antennas.

Confidential and Proprietary - Pulse Electronics - All Rights reserved - 2015

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its content, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. Information subject to change without notice.

Pulse Worldwide Headquarters
12220 World Trade Drive

San Diego, CA 92128 USA

Tel:1- 858-674-8100 Fax: 1-858-674-8262

Larsen Brand Antennas

3611 NE 112th Ave Vancouver, WA 98682 USA

Tel: 1-360-944-7551 Fax: 1-360-944-7556

Europe Headquarters

Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany

Tel: 49 7032 7806 0 Fax: 49 7032 7806 135

Pulse (Suzhou) Wireless Products Co, Inc.

99 Huo Ju Road(#29 Bldg, 4th Phase Suzhou New District Science & Tech Industrial Park Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998

Fax: 86 512 6809 8023



Performance warranty of products offered in this data sheet is limited to the parameters specified. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

©Copyright, 2015. Pulse Electronics, Inc. All rights Reserved.

www.pulseantennas.com L194.A 2/16




DAS Above-Ceiling Antenna Holder Resilient Antenna Support Part# DASACHOLDER

Typical Installation MIMO Antenna



Bracket to Ceiling Tile Rail



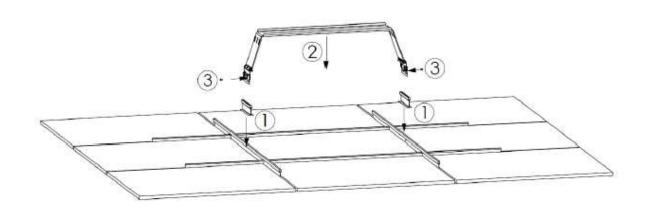

Sample installation: 1. Assemble insulating labels on ceiling rails. 2. Snap lock holder to ceiling rails. 3. Secure installation with 2pcs Nylon screws

www.pulseantennas.com L194.A 2/16




DAS Above-Ceiling Antenna Holder

Resilient Antenna Support

Part# DASACHOLDER

MECHANICAL SPECIFICATIONS	
Plastic holder	Polycarbonate, UL94-V0
Color	Transparent / white
Metal snaps	Galvanized powdercoat SPCC steel
Insulating label	Polyester, VTM-0
Weight	415g
Overall size	618.6x192.3x112 [24.35x7.57x4.41]
Fixing system	Snap to USG suspended ceiling main tee, nylon screw lock

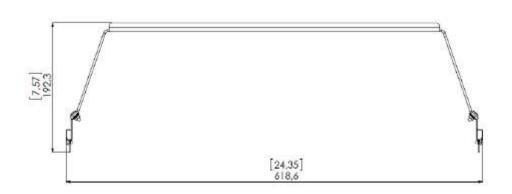



www.pulseantennas.com L194.A 2/16

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

DASACHOLDER