

ASP-137973-01

REVISION

0	DF	D FRALEY
2/5/2008		ECN-85872
ISSUE FOR REVIEW.		

A	OZ	D Fletcher
5/14/2008	ECN-90840	

RELEASE FOR PRODUCTION; BOM: CHG
ITEM 5 FROM ASP TRAY TO TY-ASP123.

B	MM	J FREEMAN
2/17/2009		ECN-105620
TOP VIEW: CHG FORMULA FOR BODY		

LENGTH FROM "17 X.800+7.50" TO "17 X.800 +7.80"

C	LF	E Fox
6/4/2009	ECN-111454	

SHT 1, TOP VIEW: CHG DIM "21.40" TO "21.10"; FRONT VIEW: CHG DIM "19.70" TO "19.40"

D	JB	Z Paden
3/2/2010		ECN-126266
SHT 2. RECOMMENDED PCB LAYOUT:		






DEL 4.90(TYP), ADD 1.80 REF, CHG 5.61 TO 5.60, CHG Ø0.83±0.02 TO Ø0.83±0.05, ADD NOTE "TO BE SOLDERED USING PASTE-IN-HOLE TECHNOLOGY"; RECOMMENDED STENCIL LAYOUT: CHG Ø1.58 (2 PLCS) TO Ø2.24(2 PLCS).

DATE: _____	☐ ACCEPTANCE OF DRAWING ☐ ACCEPTED WITH DEVIATIONS LISTED
COMPANY: _____	
CUSTOMER SIGNATURE _____	
PRINTED NAME _____	
PHONE NO: _____	
FAX NO: _____	

ITEM NO.	PART NUMBER	QUANTITY	MATERIAL
1	ASP-136451-03-B	1.0000	VECTRA E130i, COLOR: BLACK
2	C-211-05.0-S	34.000	BeCu, 390 HT
3	WT-30-01-F	2.0000	BeCu, #25, 1/2 HT
4	K-500-300	1.0000	POLYIMIDE FILM
5	TY-ASP123	1.0000	ANTI-STATIC BLACK HIPS

NOTES:

1. ITEM 1 NOT AVAILABLE AS STANDARD.
2.  REPRESENTS A CRITICAL DIMENSION.
3. MAXIMUM BURR ALLOWANCE: .038 [.0015].
4. MINIMUM PUSHOUT FORCE: 2.22N [.5LB].
5. PARTS TO BE PACKAGED IN TRAYS.

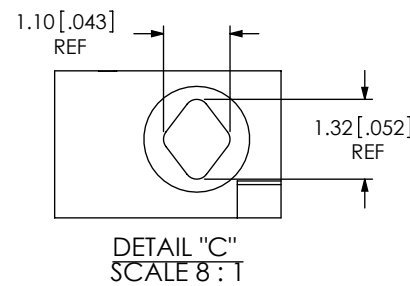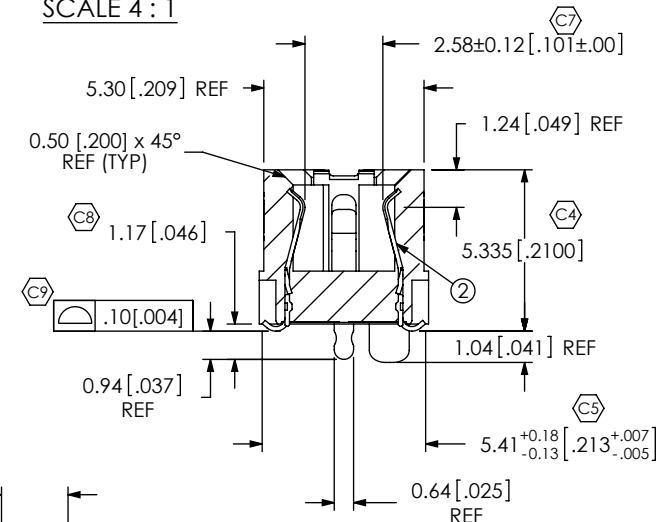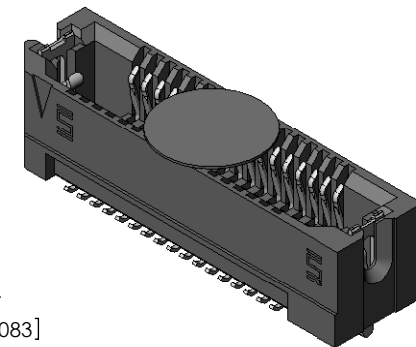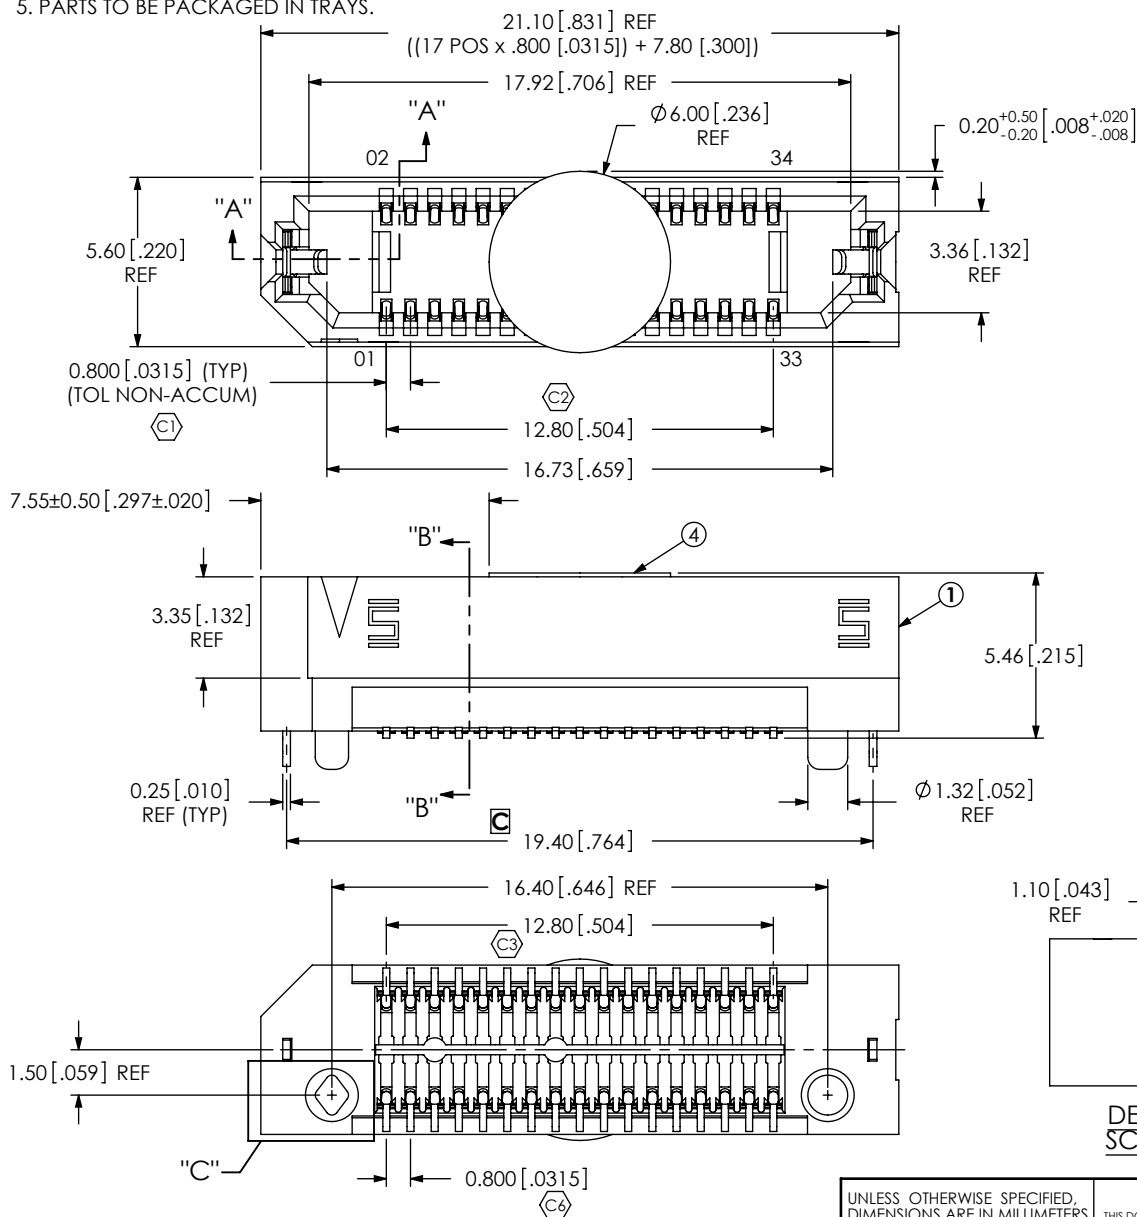

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES ARE:

DECIMALS
 .X: $\pm .3[.01]$
 .XX: $\pm .13[.005]$
 .XXX: $\pm .051[.0020]$

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:0.33

3301	DESCRIPTION:
------	--------------

PLATING:
CONTACT AREA: .000030 GOLD OVER .000050 NICKEL
REMAINDER: .000200 REF TIN OVER .000050 NICKEL
LATCHES: .000003 GOLD OVER .000050 NICKEL

F:\DWG\SW\ASP\137000\ASP-137973-01.SLDDRW



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

MODIFIED ERF8 ASSEMBLY


DWG. NO.

ASP-137973-01


BY: David F

01/24/2008


SHEET 1 OF 2

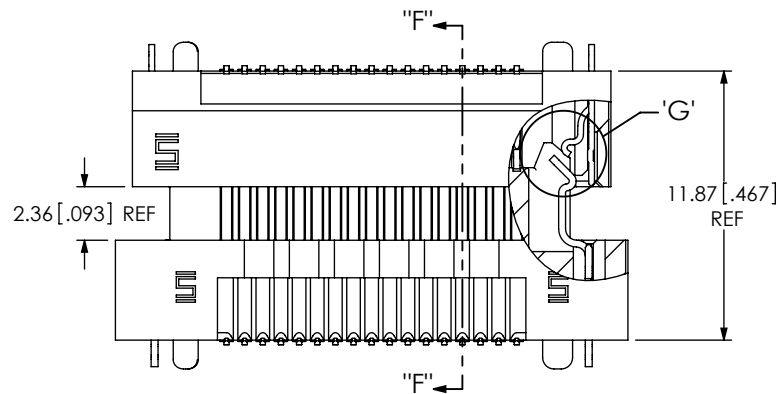


LATCH ENGAGING VIEW

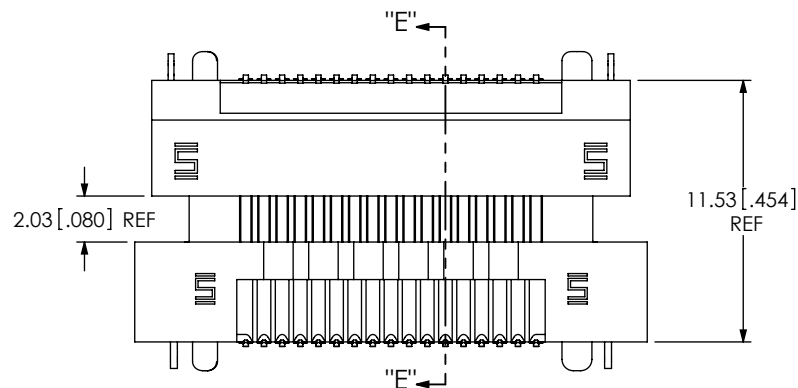


PIN ENGAGING VIEW




SECTION "F"-"F"





SECTION "E"-"E"

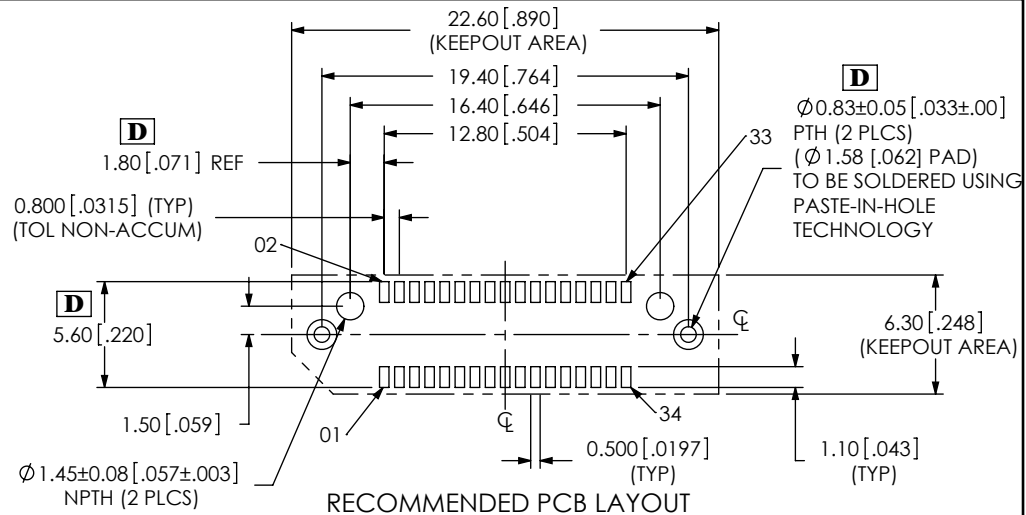

RECOMMENDED PCB LAYOUT

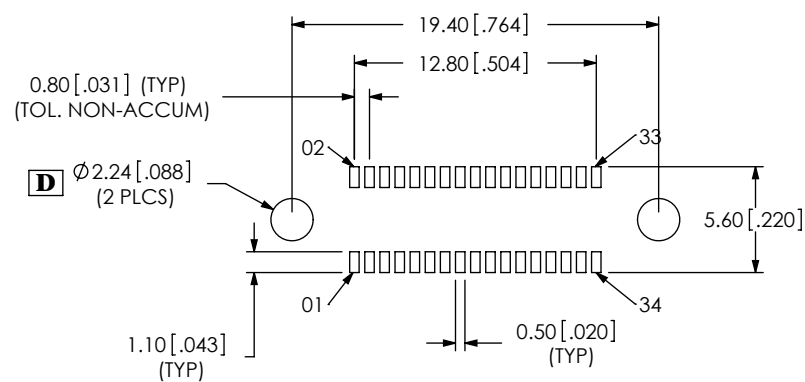

RECOMMENDED STENCIL LAYOUT

DETAIL 'G'
SCALE 6 : 1DETAIL 'H'
SCALE 6 : 1

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

SHEET SCALE: 3:1

DESCRIPTION:

MODIFIED ERF8 ASSEMBLY

DWG. NO.

ASP-137973-01

BY: David F

01/24/2008

SHEET 2 OF 2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[ASP-137973-01](#)