


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

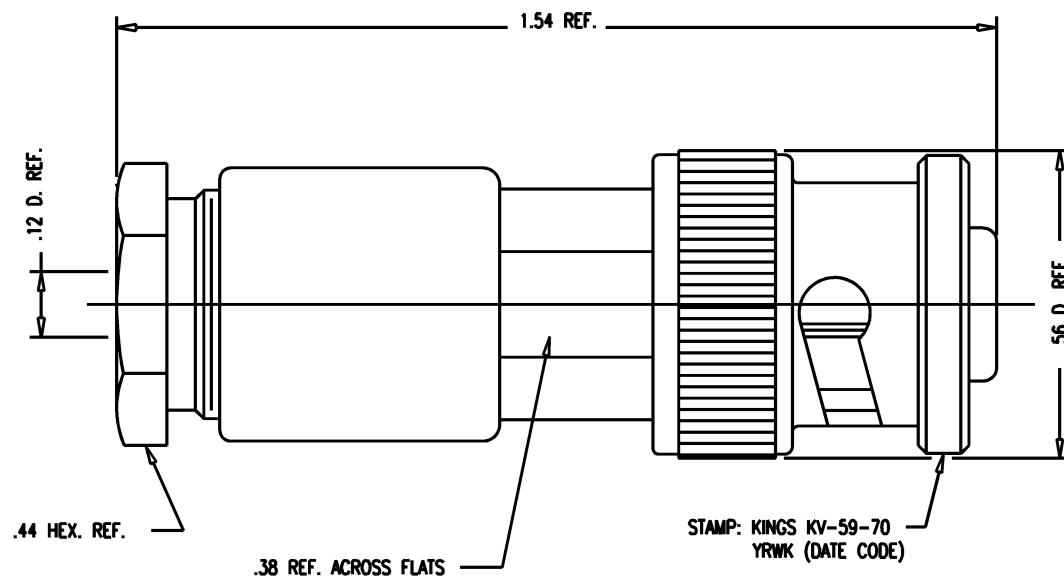

NOTES:

- FOR USE WITH RG-174, 179, 187 & 188/U CABLE.
- FOR CABLING INSTRUCTIONS SEE CP-1002
- MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
GASKET: SILICONE RUBBER, ZZ-R-765
SPRING WASHER: BER. COP, ASTM-B-196
ALL OTHER METAL PARTS-BRASS, ASTM-B-16
- FINISHES:
CENTER CONTACT: GOLD PLATE PER MIL-G-45204
SPRING WASHER: SILVER PLATE PER QQ-S-365
ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE-NON CONSTANT
WORKING VOLTAGE-3500 VRMS
5000 VDC

SD

KV-59-70

REVISIONS

ISSUE	CHANGES
2	CN 37290 C REDRAWN KH 04/30/97

KV5970S

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, MHV

DRAWN	GINO	DATE	08/15/75
DESIGN	JC	DATE	08/15/75
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KV-59-70

SD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Winchester Interconnect:](#)

[KV-59-70](#)