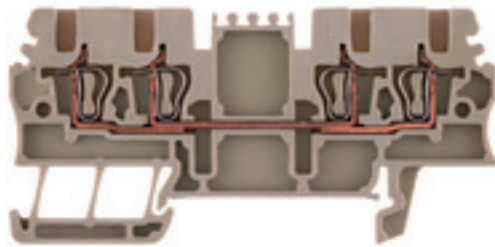


**ZDU 1.5/4AN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Product image****Spring connection with tension clamp Technology**

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

**General ordering data**

|            |                                                                                                  |
|------------|--------------------------------------------------------------------------------------------------|
| Version    | Feed-through terminal, Tension-clamp connection, 1.5 mm <sup>2</sup> , 500 V, 17.5 A, dark beige |
| Order No.  | <a href="#">1775580000</a>                                                                       |
| Type       | ZDU 1.5/4AN                                                                                      |
| GTIN (EAN) | 4032248181629                                                                                    |
| Qty.       | 100 pc(s).                                                                                       |

**ZDU 1.5/4AN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|                          |            |                |            |
|--------------------------|------------|----------------|------------|
| Depth                    | 36.5 mm    | Depth (inches) | 1.437 inch |
| Depth including DIN rail | 37 mm      | Height         | 75.5 mm    |
| Height (inches)          | 2.972 inch | Width          | 3.5 mm     |
| Width (inches)           | 0.138 inch | Net weight     | 6.54 g     |

**Temperatures**

|                                  |                |                                  |                                                                                                   |
|----------------------------------|----------------|----------------------------------|---------------------------------------------------------------------------------------------------|
| Storage temperature              |                | Operating temperature range      | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity |
|                                  | -25 °C...55 °C |                                  |                                                                                                   |
| Continuous operating temp., min. | -50            | Continuous operating temp., max. | 120                                                                                               |

**Material data**

|                           |       |        |            |
|---------------------------|-------|--------|------------|
| Material                  | Wemid | Colour | dark beige |
| UL 94 flammability rating | V-0   |        |            |

**Rating data IECEx/ATEX**

|                                |                                                                                                   |                                 |                     |
|--------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------|---------------------|
| Certificate No. (ATEX)         | DEMKO15ATEX1467U                                                                                  | Certificate No. (IECEX)         | IECEXULD15.0008U    |
| Max. voltage (ATEX)            | 550 A                                                                                             | Current (ATEX)                  | 17 A                |
| Wire cross section max. (ATEX) | 1.5 mm <sup>2</sup>                                                                               | Max. voltage (IECEX)            | 550 V               |
| Current (IECEX)                | 17 A                                                                                              | Wire cross section max. (IECEX) | 1.5 mm <sup>2</sup> |
| Operating temperature range    | For operating temperature range see EC Design Test Certificate / IEC Ex-Certificate of Conformity | Marking EN 60079-7              |                     |
| Ex 2014/34/EU label            | II 2 G D                                                                                          |                                 | Ex eb II C Gb       |

**System specifications**

|                               |                                                                                  |                                     |       |
|-------------------------------|----------------------------------------------------------------------------------|-------------------------------------|-------|
| Version                       | Tension-clamp connection, for plug-in cross-connector, One end without connector | End cover plate required            | Yes   |
| Number of levels              | 1                                                                                | Number of clamping points per level | 4     |
| Number of potentials per tier | 1                                                                                | Levels cross-connected internally   | No    |
| PE connection                 | No                                                                               | Rail                                | TS 35 |

**Additional technical data**

|                          |       |                             |         |
|--------------------------|-------|-----------------------------|---------|
| Explosion-tested version | Yes   | Number of similar terminals | 1       |
| Open sides               | right | Type of mounting            | Snap-on |

**CSA rating data**

|                               |                |                               |        |
|-------------------------------|----------------|-------------------------------|--------|
| Certificate No. (CSA)         | 200039-1152892 | Current size C (CSA)          | 20 A   |
| Voltage size C (CSA)          | 300 V          | Wire cross section max. (CSA) | 14 AWG |
| Wire cross section min. (CSA) | 26 AWG         |                               |        |

**Conductors for clamping (rated connection)**

|                      |                      |
|----------------------|----------------------|
| Blade size           | 0.4 x 2.0 mm         |
| Clamping range, max. | 1.5 mm <sup>2</sup>  |
| Clamping range, min. | 0.05 mm <sup>2</sup> |

Creation date January 13, 2022 11:58:20 PM CET

**ZDU 1.5/4AN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data**

|                                                                                         |                                        |         |                      |
|-----------------------------------------------------------------------------------------|----------------------------------------|---------|----------------------|
| Connection direction                                                                    | top                                    |         |                      |
| Gauge to IEC 60947-1                                                                    | B1                                     |         |                      |
| Number of connections                                                                   | 4                                      |         |                      |
| Stripping length                                                                        | 10 mm                                  |         |                      |
| Tube length for wire-end ferrule with plastic collar DIN 46228/4                        | Cross-section for conductor connection | nominal | 0.5 mm <sup>2</sup>  |
|                                                                                         |                                        | min.    | 6 mm                 |
|                                                                                         |                                        | max.    | 10 mm                |
|                                                                                         | Cross-section for conductor connection | nominal | 0.75 mm <sup>2</sup> |
|                                                                                         |                                        | min.    | 6 mm                 |
|                                                                                         |                                        | max.    | 12 mm                |
|                                                                                         | Cross-section for conductor connection | nominal | 1 mm <sup>2</sup>    |
|                                                                                         |                                        | min.    | 6 mm                 |
|                                                                                         |                                        | max.    | 12 mm                |
| Tube length for wire-end ferrule without plastic collar DIN 46228/1                     | Cross-section for conductor connection | nominal | 0.5 mm <sup>2</sup>  |
|                                                                                         |                                        | nominal | 10 mm                |
|                                                                                         | Cross-section for conductor connection | nominal | 0.75 mm <sup>2</sup> |
|                                                                                         |                                        | nominal | 10 mm                |
|                                                                                         | Cross-section for conductor connection | nominal | 1 mm <sup>2</sup>    |
|                                                                                         |                                        | nominal | 10 mm                |
|                                                                                         | Cross-section for conductor connection | nominal | 1.5 mm <sup>2</sup>  |
|                                                                                         |                                        | min.    | 10 mm                |
|                                                                                         |                                        | max.    | 12 mm                |
| Twin wire-end ferrules, max.                                                            | 0.75 mm <sup>2</sup>                   |         |                      |
| Twin wire-end ferrules, min.                                                            | 0.5 mm <sup>2</sup>                    |         |                      |
| Type of connection                                                                      | Tension-clamp connection               |         |                      |
| Wire connection cross section AWG, max.                                                 | AWG 16                                 |         |                      |
| Wire connection cross section AWG, min.                                                 | AWG 28                                 |         |                      |
| Wire connection cross section, finely stranded, max.                                    | 1.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross section, finely stranded, min.                                    | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 1.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max. | 1.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min. | 0.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, max.                                         | 1.5 mm <sup>2</sup>                    |         |                      |
| Wire connection cross-section, solid core, min.                                         | 0.5 mm <sup>2</sup>                    |         |                      |

**General**

|                                         |        |                                         |               |
|-----------------------------------------|--------|-----------------------------------------|---------------|
| Rail                                    | TS 35  | Standards                               | IEC 60947-7-1 |
| Wire connection cross section AWG, max. | AWG 16 | Wire connection cross section AWG, min. | AWG 28        |

## ZDU 1.5/4AN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Rating data

|                                 |                     |                                              |         |
|---------------------------------|---------------------|----------------------------------------------|---------|
| Rated cross-section             | 1.5 mm <sup>2</sup> | Rated voltage                                | 500 V   |
| Rated current                   | 17.5 A              | Current at maximum wires                     | 17.5 A  |
| Standards                       | IEC 60947-7-1       | Volume resistance according to IEC 60947-7-x | 1.83 mΩ |
| Rated impulse withstand voltage | 6 kV                | Power loss in accordance with IEC 60947-7-x  | 0.56 W  |
| Pollution severity              | 3                   |                                              |         |

## UL rating data

|                                         |        |                                         |        |
|-----------------------------------------|--------|-----------------------------------------|--------|
| Certificate No. (UR)                    | E60693 | Conductor size Factory wiring max. (UR) | 14 AWG |
| Conductor size Factory wiring min. (UR) | 26 AWG | Conductor size Field wiring max. (UR)   | 14 AWG |
| Conductor size Field wiring min. (UR)   | 26 AWG | Current size C (UR)                     | 15 A   |
| Voltage size C (UR)                     | 300 V  |                                         |        |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000897    | ETIM 7.0    | EC000897    |
| ETIM 8.0    | EC000897    | ECLASS 9.0  | 27-14-11-20 |
| ECLASS 9.1  | 27-14-11-20 | ECLASS 10.0 | 27-14-11-20 |
| ECLASS 11.0 | 27-14-11-20 |             |             |

## Approvals

Approvals



|                       |         |
|-----------------------|---------|
| ROHS                  | Conform |
| UL File Number Search | E60693  |

## Downloads

|                                             |                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Approval/Certificate/Document of Conformity | <a href="#">Attestation of Conformity</a><br><a href="#">IECEX Certificate</a><br><a href="#">EAC certificate</a><br><a href="#">Lloyds Register Certificate</a><br><a href="#">EAC EX Certificate</a><br><a href="#">CCC Ex Certificate</a><br><a href="#">ATEX Certificate</a><br><a href="#">Declaration of Conformity</a><br><a href="#">CE Declaration of Conformity all terminals</a> |
| Engineering Data                            | <a href="#">CAD data – STEP</a>                                                                                                                                                                                                                                                                                                                                                             |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                                                                                                                                                                                                                                                                                                                                    |
| User Documentation                          | <a href="#">StorageConditionsTerminalBlocks</a><br><a href="#">NTI ZDU/ZPE 1.5/4AN</a>                                                                                                                                                                                                                                                                                                      |
| Catalogues                                  | <a href="#">Catalogues in PDF-format</a>                                                                                                                                                                                                                                                                                                                                                    |
| Brochures                                   |                                                                                                                                                                                                                                                                                                                                                                                             |

### ZDU 1.5/4AN

**Weidmüller Interface GmbH & Co. KG**


Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings



**ZDU 1.5/4AN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****WS 12/3.5****WS/ DEK**

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

**Your benefits with MultiMark**

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

**General ordering data**

|            |                            |                                                      |
|------------|----------------------------|------------------------------------------------------|
| Type       | WS 12/3.5 MM WS            | Version                                              |
| Order No.  | <a href="#">2007180000</a> | WS, Terminal marker, 12 x 3.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392203              |                                                      |
| Qty.       | 1,000 pc(s).               |                                                      |

## ZDU 1.5/4AN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## DEK 5/3.5



## WS/ DEK

MultiMark terminal markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.


## Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

## General ordering data

|            |                            |                                                          |
|------------|----------------------------|----------------------------------------------------------|
| Type       | DEK 5/3.5 MM WS            | Version                                                  |
| Order No.  | <a href="#">2007100000</a> | Dekafix, Terminal marker, 5 x 3.5 mm, Weidmueller, white |
| GTIN (EAN) | 4050118391992              |                                                          |
| Qty.       | 1,000 pc(s).               |                                                          |

## Z-Series



Test adapters and test plugs are used for the electrical connection between terminal blocks and the test equipment. In this way, an electrical contact can be established in the wired state and measurements can be done easily.

## General ordering data

|            |                            |                                   |
|------------|----------------------------|-----------------------------------|
| Type       | ZTA 5                      | Version                           |
| Order No.  | <a href="#">1776210000</a> | Accessories, Test adapter, 13.5 A |
| GTIN (EAN) | 4032248190676              |                                   |
| Qty.       | 25 pc(s).                  |                                   |
| Type       | ZTA 5/ZA                   | Version                           |
| Order No.  | <a href="#">1776220000</a> | Accessories, Test adapter, 13.5 A |
| GTIN (EAN) | 4032248190683              |                                   |
| Qty.       | 25 pc(s).                  |                                   |

## ZDU 1.5/4AN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.


- Can be fitted in strips or individually
- Markers in proven MultiCard format

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

| Type       | WS 12/3.5 MC NE WS         | Version                                                 |
|------------|----------------------------|---------------------------------------------------------|
| Order No.  | <a href="#">1778270000</a> | WS, Terminal marker, 12 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248161041              | Weidmueller, Allen-Bradley, white                       |
| Qty.       | 600 pc(s).                 |                                                         |

## Z-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

| Type       | ZEW 35/2                   | Version               |
|------------|----------------------------|-----------------------|
| Order No.  | <a href="#">8630740000</a> | Z-series, End bracket |
| GTIN (EAN) | 4032248348916              |                       |
| Qty.       | 20 pc(s).                  |                       |


| Type       | ZEW 35                     | Version               |
|------------|----------------------------|-----------------------|
| Order No.  | <a href="#">9540000000</a> | Z-series, End bracket |
| GTIN (EAN) | 4008190956264              |                       |
| Qty.       | 20 pc(s).                  |                       |

**ZDU 1.5/4AN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold


Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Z-Series**

The use of reducing sleeves simplifies the connection of conductors with smaller cross-sections. Conductors can be reliably inserted into the clamping point without the strands fraying. The use of a reducing sleeve centres the conductor in the entry point.

**General ordering data**

|            |                            |                              |
|------------|----------------------------|------------------------------|
| Type       | ZRH 1.5S/1                 | Version                      |
| Order No.  | <a href="#">1781950000</a> | Accessories, Reducing sleeve |
| GTIN (EAN) | 4032248199525              |                              |
| Qty.       | 500 pc(s).                 |                              |

**Z-Series**

Warning covers with a flash symbol provide more safety for man and machine. They are used where external voltage must be indicated within the application.

**General ordering data**

|            |                            |                 |
|------------|----------------------------|-----------------|
| Type       | ZAD 7/4                    | Version         |
| Order No.  | <a href="#">1781940000</a> | Z-series, Cover |
| GTIN (EAN) | 4032248193431              |                 |
| Qty.       | 20 pc(s).                  |                 |

**ZDU 1.5/4AN****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Accessories****Slotted screwdriver**

Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip

**General ordering data**

|            |                            |                                                                                      |
|------------|----------------------------|--------------------------------------------------------------------------------------|
| Type       | SDS 0.4X2.0X60             | Version                                                                              |
| Order No.  | <a href="#">2749260000</a> | Screwdriver, Blade width (B): 2 mm, Blade length: 60 mm, Blade thickness (A): 0.4 mm |
| GTIN (EAN) | 4050118895537              |                                                                                      |
| Qty.       | 1 pc(s).                   |                                                                                      |

**W-Series**

Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

**General ordering data**

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | WEW 35/1                   | Version               |
| Order No.  | <a href="#">1059000000</a> | W-Series, End bracket |
| GTIN (EAN) | 4008190172282              |                       |
| Qty.       | 50 pc(s).                  |                       |
| Type       | WEW 35/2                   | Version               |
| Order No.  | <a href="#">1061200000</a> | W-Series, End bracket |
| GTIN (EAN) | 4008190030230              |                       |
| Qty.       | 50 pc(s).                  |                       |

## ZDU 1.5/4AN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## SAK-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                          |
|------------|----------------------------|--------------------------|
| Type       | EW 35                      | Version                  |
| Order No.  | <a href="#">0383560000</a> | Accessories, End bracket |
| GTIN (EAN) | 4008190181314              |                          |
| Qty.       | 50 pc(s).                  |                          |
| Type       | EW 35 GR 7032              | Version                  |
| Order No.  | <a href="#">0383530000</a> | Accessories, End bracket |
| GTIN (EAN) | 4008190027322              |                          |
| Qty.       | 50 pc(s).                  |                          |
| Type       | EW 35/SCHA/M3              | Version                  |
| Order No.  | <a href="#">0258660000</a> | Accessories, End bracket |
| GTIN (EAN) | 4008190033477              |                          |
| Qty.       | 20 pc(s).                  |                          |

1.5 mm<sup>2</sup>


End plates are fitted to the open side of the last modular terminal before the end bracket. The use of an end plate ensures the function of the modular terminal and the specified rated voltage. It guarantees protection against contact with live parts and makes the final terminal finger-proof.

## General ordering data

|            |                            |                                      |
|------------|----------------------------|--------------------------------------|
| Type       | ZAP/TW ZDU1.5/4AN BL       | Version                              |
| Order No.  | <a href="#">1776100000</a> | Z-series, End plate, Partition plate |
| GTIN (EAN) | 4032248188185              |                                      |
| Qty.       | 20 pc(s).                  |                                      |
| Type       | ZAP/TW ZDU1.5/4AN OR       | Version                              |
| Order No.  | <a href="#">1776110000</a> | Z-series, End plate, Partition plate |
| GTIN (EAN) | 4032248188208              |                                      |
| Qty.       | 20 pc(s).                  |                                      |
| Type       | ZAP/TW ZDU1.5/4AN          | Version                              |
| Order No.  | <a href="#">1776090000</a> | Z-series, End plate, Partition plate |
| GTIN (EAN) | 4032248188178              |                                      |
| Qty.       | 20 pc(s).                  |                                      |

## ZDU 1.5/4AN

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.


Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                             |
|------------|----------------------------|-------------------------------------------------------------|
| Type       | DEK 5/3.5 MC NE WS         | Version                                                     |
| Order No.  | <a href="#">1755270000</a> | Dekafix, Terminal marker, 5 x 3.5 mm, Pitch in mm (P): 3.50 |
| GTIN (EAN) | 4032248017348              | Weidmueller, white                                          |
| Qty.       | 500 pc(s).                 |                                                             |

1.5 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## General ordering data

|            |                            |                                      |
|------------|----------------------------|--------------------------------------|
| Type       | ZQV 1.5/2                  | Version                              |
| Order No.  | <a href="#">1776120000</a> | Accessories, Cross-connector, 17.5 A |
| GTIN (EAN) | 4032248200139              |                                      |
| Qty.       | 60 pc(s).                  |                                      |
| Type       | ZQV 1.5/10                 | Version                              |
| Order No.  | <a href="#">1776200000</a> | Accessories, Cross-connector, 17.5 A |
| GTIN (EAN) | 4032248200177              |                                      |
| Qty.       | 20 pc(s).                  |                                      |
| Type       | ZQV 1.5/4                  | Version                              |
| Order No.  | <a href="#">1776140000</a> | Accessories, Cross-connector, 17.5 A |
| GTIN (EAN) | 4032248200160              |                                      |
| Qty.       | 60 pc(s).                  |                                      |

## ZDU 1.5/4AN

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

|            |                            |                                      |
|------------|----------------------------|--------------------------------------|
| Type       | ZQV 1.5/5                  | Version                              |
| Order No.  | <a href="#">1776150000</a> | Accessories, Cross-connector, 17.5 A |
| GTIN (EAN) | 4032248236336              |                                      |
| Qty.       | 20 pc(s).                  |                                      |
| Type       | ZQV 1.5/3                  | Version                              |
| Order No.  | <a href="#">1776130000</a> | Accessories, Cross-connector, 17.5 A |
| GTIN (EAN) | 4032248200153              |                                      |
| Qty.       | 60 pc(s).                  |                                      |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Weidmuller:](#)

[1775580000](#)