

IE-PS-RJ45-FH-180-B-1.1**Weidmüller Interfaces GmbH & Co. KG**

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com



RJ45 plug-in connector (no tools required) according to IEC 60603-7-51.

General ordering data

Version	RJ45 plug with piercing contacts, straight, Cat.6 _A / Class E _A (ISO/IEC 11801 2010), EIA/TIA T568 B
Order No.	1992860000
Type	IE-PS-RJ45-FH-180-B-1.1
GTIN (EAN)	4050118378108
Qty.	1 pc(s).

IE-PS-RJ45-FH-180-B-1.1

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 24 g

Temperatures

Operating temperature -40 °C...85 °C

General data

Outlet direction	straight	Connection 1	RJ45
Connection 2	Piercing	Wiring	EIA/TIA T568 B
Speed	10 GBit	Insulation cross-section, min.	0.85
Insulation cross-section, max.	1.1	Category	Cat.6A / Class EA (ISO/IEC 11801 2010)
Connection diameter, solid	0.41...0.51	Conductor connection cross-section, solid (AWG)	AWG 26...AWG 24
Connection diameter, flexible	0.46...0.61 mm	Conductor connection cross-section, flexible (AWG)	AWG 27...AWG 24
Conductor connection cross-section, extremely flexible	0.51, Approval of the cable by Weidmüller necessary	Conductor connection cross-section, extremely flexible (AWG)	AWG 26, Approval of the cable by Weidmüller necessary
Note, very finely stranded line connection	Approval of the cable by Weidmüller necessary	Sheath diameter, min.	5 mm
Sheath diameter, max.	9 mm	Shielding	360°; all-round enclosure
Protection degree	IP20	Ability to reconnect	≤ 4 cycles (with the same cross-section)

Electrical properties

Contact resistance	≤ 20 mΩ	Current-carrying capacity at 50 °C	1 A
Dielectric strength, contact / contact	≥ 1000 V DC	Dielectric strength, contact / shield	≥ 1500 V DC
PoE / PoE+	conforming to IEEE 802.3at		

General standards


Certificate No. (DNVGL)	TAE00003EW	Certificate no. (cULus)	E471884
Connector standard	IEC 60603-7-51		

Classifications

ETIM 6.0	EC001121	ETIM 7.0	EC001121
ETIM 8.0	EC001121	ECLASS 9.0	27-44-03-90
ECLASS 9.1	27-44-03-90	ECLASS 10.0	27-44-03-90
ECLASS 11.0	27-44-03-90	ECLASS 12.0	27-44-03-90

Approvals

Approvals



ROHS	Conform
UL File Number Search	UL Website
Certificate no. (cULus)	E471884

Creation date September 17, 2022 9:05:32 PM CEST

Catalogue status 09.09.2022 / We reserve the right to make technical changes.

IE-PS-RJ45-FH-180-B-1.1

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0

Fax. +49 5231 14-2083

Technical data

info@weidmueller.com

www.weidmueller.com

Downloads

Engineering Data	CAD data – STEP
Engineering Data	EPLAN, WSCAD
User Documentation	MAN IE GUIDE DE MAN IE GUIDE EN Manual
Catalogues	Catalogues in PDF-format
Brochures	MB FREECONTACT EN FL FIELDWIRING EN PI PROFINET CABLING EN PI PROFINET CABLING EN

IE-PS-RJ45-FH-180-B-1.1

Weidmüller Interfaces GmbH & Co. KG

Postfach 3030

32760 Detmold

Tel. +49 5231 14-0


Fax. +49 5231 14-2083

info@weidmueller.com

www.weidmueller.com

Drawings

Dimensioned drawing

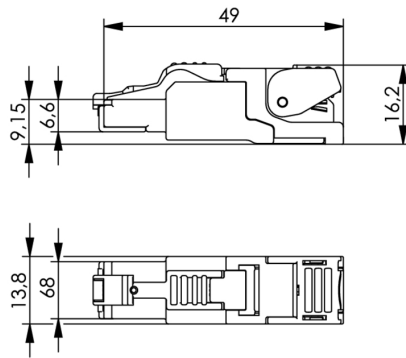

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Weidmuller:](#)

[1992860000](#)