BGA Heat Sink - High Performance maxiFLOW/maxiGRIP-Low Profile





ATS Part#: ATS-51425R-C1-R0

Description: 42.50 x 42.50 x 19.50 mm BGA Heat Sink - High

Performance maxiFLOW/maxiGRIP-Low Profile

Heat Sink Type: maxiFLOW
Heat Sink Attachment: maxiGRIP

Equivalent Part Number: ATS-51425R-C2-R0


Features & Benefits

- maxiFLOW™ design features a low profile, spread fin array that maximizes surface area for more effective convection (air) cooling
- maxiGRIPTM attachment applies steady, even pressure to the component and does not require holes in the PCB
- Meets Telcordia GR-63-Core Office Vibration; ETSI 300 019 Transportation Vibration; and MIL-STD-810 Shock and Unpackaged Drop Testing standards
- · Comes preassembled with high performance thermal interface material
- · Designed for low profile components from 1.5 to 2.99mm

Thermal Performance

AIR VELOCITY		@200 LFM 1.0 M/S	@300 LFM 1.5 M/S	@400 LFM 2.0 M/S	@500 LFM 2.5 M/S	@600 LFM 3.0 M/S	@700 LFM 3.5 M/S	@800 LFM 4.0 M/S
THERMAL RESISTANCE	Unducted Flow	1.9 °C/W	1.5 °C/W	1.3 °C/W	1.2 °C/W	1.1 °C/W	1 °C/W	0.9 °C/W
	Ducted Flow	1.5	N/A	N/A	N/A	N/A	N/A	N/A

Product Detail

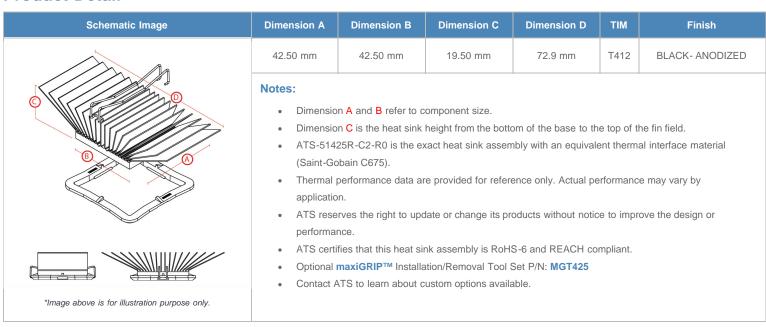





^{*}Image above is for illustration purpose only.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Advanced Thermal Solutions:

ATS-51425R-C1-R0