

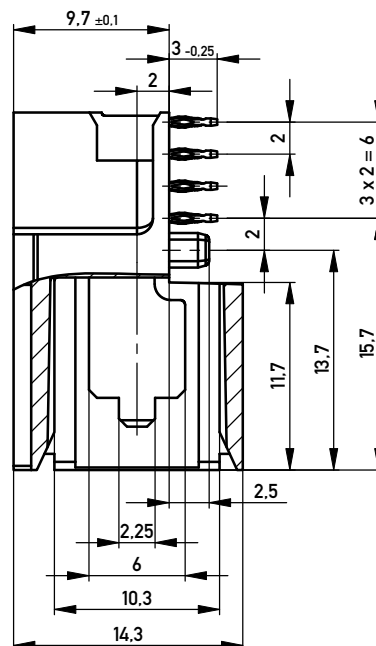



L = lang / *long*
M = mittel / *middle*
S = kurz / *short*

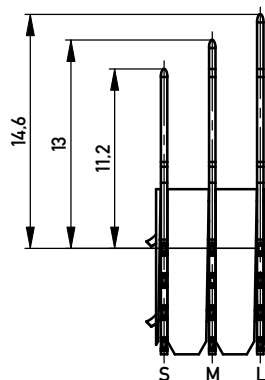

1) $\phi 0,6 \pm 0,05$ Durchmesser des metallisierten Loches
 $\phi 0,6 \pm 0,05$ Diameter of finished plated-through hole

Schichtaufbau im metallisierten Loch siehe
Zeichnung 114406 / 164062 Nr.1
*Metal plating of plated-through hole see
drawing 114406 / 164062 No.1*




M 1:5


verpackt in Tray
VPE: 72 St.

tray packaging
packaging unit 72 pcs.

Bestückungsplan /
contact layout

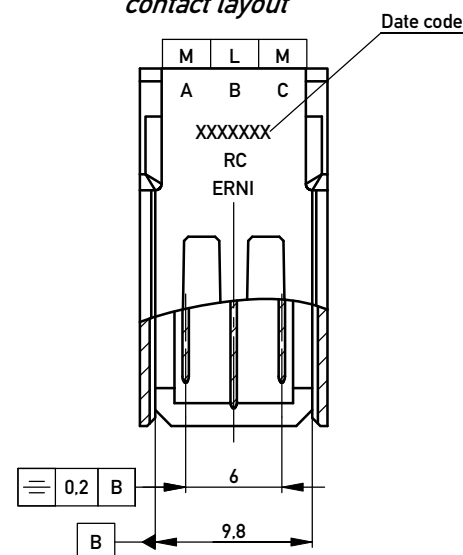

DETAIL A
MAßSTAB 1 : 1



Oberflächenbeschichtung / *plating*:
 Kontaktbereich / *mating area*: 0.65µm PdNi, 0.1µm Au
 Anschlussbereich / *termination*: 1.5-3µm Ni, 0.5-2µm Sn matt

Anforderungsstufe 2 / class 2

Copyright by ERNI GmbH
All rights reserved.
Prior notice pursuant to ISO 14016 is to be observed.

Information:			Tolerances		 All Dimensions in mm		Scale		3:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			Subject to modification without prior notice. Drawing will not be updated.		Designation							
					ERmet Messerleiste PM 14,3 <i>ERmet Male PM 14,3</i>							
k			19.11.2010		 www.ERNI.com		114402				I	
Index			Date								A3	
					Class ERMPM							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[114402](#)