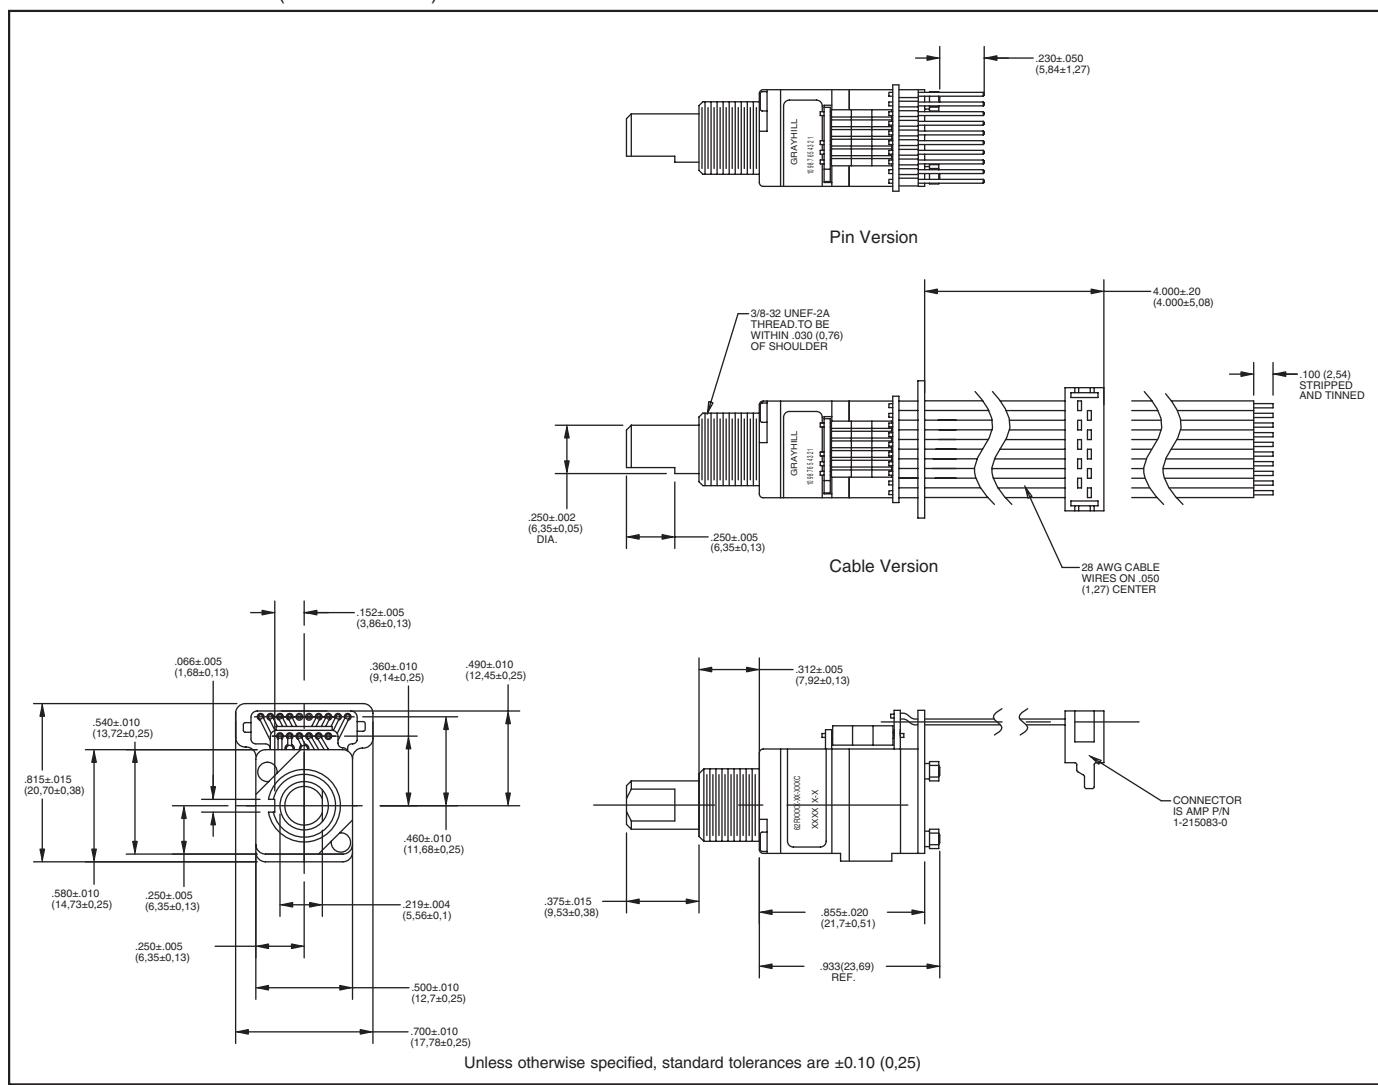


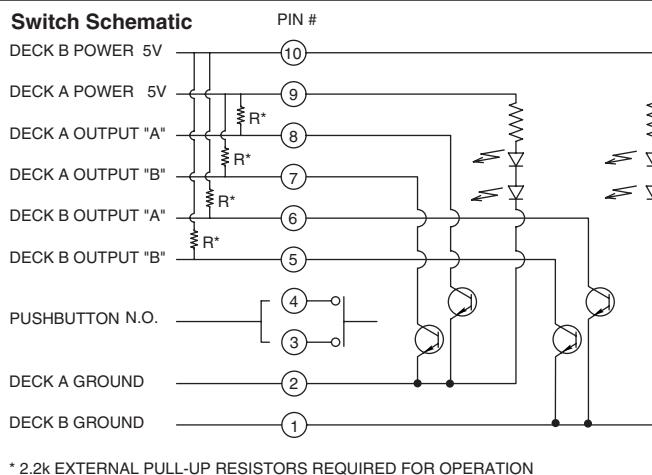
SERIES 62R**1/2" Package, Redundant Circuitry****FEATURES**

- Redundant Circuitry
- 1 Million Rotational Cycles
- Compatible with CMOS, TTL and HCMOS Logic
- Optional Integral Pushbutton
- Available in 12, 16, 24, and 32 Detent Positions
- Choices of Cable Length and Terminations
- Ideal for Critical Applications

APPLICATIONS

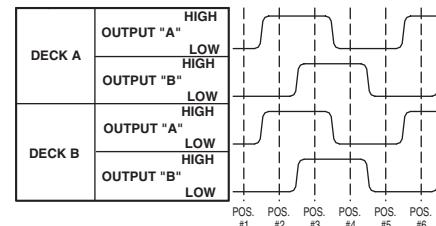
- Cockpit Controls
- Medical Equipment

**DIMENSIONS** In inches (and millimeters)

CIRCUITRY, TRUTH TABLE, AND WAVEFORM Standard Quadrature 2-Bit Code**Truth Table (CW Rotation)**

POSITION	DECK A		DECK B	
	OUTPUT 'A'	OUTPUT 'B'	OUTPUT 'A'	OUTPUT 'B'
1				
2	●			●
3	●	●	●	●
4		●		●

● INDICATES LOGIC HIGH. BLANK INDICATES LOGIC LOW. CODE REPEATS EVERY 4 POSITIONS

Wave Form (CW Rotation)**SPECIFICATIONS****Pushbutton Switch Ratings**

Pushbutton Rating: 10 mA, 5 Vdc, resistive
Contact Resistance: less than 10 ohms (TTL or CMOS compatible)

Pushbutton Life: 3 million actuations min.
Contact Bounce: less than 4 mS at make and less than 10 mS at break

Actuation Force: 1000 ±300 grams

Pushbutton Travel: .010/.025"

Switch Ratings

Coding: 2-bit quadrature coded output

Operating Voltage: 5.0 ±.25 Vdc

Voltage Breakdown: 250 Vac between mutually insulated parts

Supply Current: 30 mA maximum@5.0 Vdc (per deck)

Logic Output Characteristics:

Logic High: 3.5 Vdc minimum

Logic Low: 1.5 Vdc maximum

Mechanical Life: 1,000,000 cycles minimum (One cycle is a rotation through all positions and a full return)

Minimum Sink Current: 2.0 mA

Power Consumption: 150mW max. (per deck)

Output: open collector phototransistor

Optical Rise and Fall Times: less than 30

mS maximum

Operating Torque: 3.5 ±1.4 in-oz initially

Shaft Push Out Force: 45 lbs minimum

Mounting Torque: 15 in-lbs max.

Terminal Strength: 15 lbs cable pull-out force min.

Operating Speed: 100 RPM max.

Environmental Ratings

Operating Temperature Range: -40°C to 85°C

Storage Temperature Range: -55°C to 100°C

Vibration Resistance: Harmonic motion with amplitude of 15G's, within a varied 10 to 2000 Hz frequency for 12 hours

Mechanical Shock: Test 1: 100g, 6 mS, half sine, 12.3 ft/s; Test 2: 100g, 6 mS, sawtooth, 9.7 ft/s

Humidity: 90-95% at 40°C for 96 hours

Materials and Finishes

Shaft: Aluminum

Bushing: Zinc casting

Shaft Retaining Ring: Stainless steel

Detent Spring: Stainless steel

Printed Circuit Boards: NEMA grade FR-4 gold over nickel or palladium

Terminals: Brass, tin-plated

Mounting Hardware: One brass, nickel-plated nut and stainless steel lockwasher supplied with each switch. Nut is 0.094 inches thick by 0.562 inches across flats

Rotor: Thermoplastic

Code Housing: Thermoplastic

Pushbutton Dome: Stainless steel

Dome Retaining Disk: Thermoplastic

Pushbutton Housing: Thermoplastic

Phototransistor: Planar Silicon NPN

Infrared Emitter: Gallium aluminum arsenide

Pushbutton Contact: Brass, nickel-plated

Flex Cable: 28 AWG stranded, halogen-free polyolefin insulation on .050" centers (cabled version)

Header Pins: Phosphor bronze, tin-plated

Spacer: Zinc casting

Backplate/Strain Relief: Stainless steel

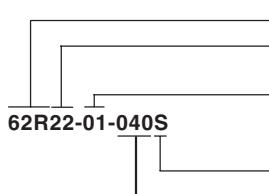
Lockwasher(s): Stainless steel

Hex Nuts: Stainless steel

Studs: Stainless steel

OPTIONS

Contact Grayhill for custom terminations, shaft and bushing configurations, and resolutions. Control knobs are also available.

ORDERING INFORMATION

Series

Angle of Throw: 11 = 11.25° or 32 pos., 15 = 15° or 24 pos, 22 = 22.5° or 16 positions, 30 = 30° or 12 Positions

Pushbutton Option: 01 = w/o pushbutton, 02 = with pushbutton

Termination: .050" centers; S = Stripped cable, C = Connector, P = Pin

Cable Length: 040 = 4.0 inches. Cable is terminated with Amp Connector P/N 215083-8.

See Amp Mateability Guide for mating connector details.

*Eliminate cable length if ordering pins. (Ex: 62R22-02-P)

Custom materials, styles, colors, and markings are available. Control knobs available.

Available from your local Component Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor, or Grayhill.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Grayhill](#):

[62R11-02-040S](#) [62R11-01-P](#) [62R11-02-P](#) [62R11-02-040C](#)