

Actuator

45-
2C36.1920.000



<https://www.eao.com/p/45-2C36.1920.000>

Your product:



45-2C36.1920.000 Actuator

FRONT

Front dimension:	Ø 40 mm
Front form:	Round
Front bezel colour:	Black
Front bezel material:	Plastic

MOUNTING

Mounting type:	Panel mounting
----------------	----------------

OPERATING-/INDICATION PART

Lens colour:	Red
Lens material:	Plastic
Lens illumination:	Non illuminated
Lens shape:	Mushroom-head
Lens optics:	opaque

ELECTRICAL CHARACTERISTICS

Switching rating:	
-------------------	--

MECHANICAL CHARACTERISTIC

Switching action:	Maintained
Release type:	Twist to unlock
Mechanical lifetime:	300 000 cycles of operation

Operating frequency: Max. 600/h

Weight: 0.045 kg

AMBIENT CONDITION

Operating temperature: – 25 °C ... + 70 °C

Storage temperature: – 40 °C ... + 80 °C

Shock resistance: According to IEC 60068-2-27: Sinusoidal half-wave 50 g / 11 ms

Vibration resistance: According to IEC 60068-2-6: 2 ... 500 Hz: 5 g

Climate resistance: During operation according to IEC 60721: 3K6, 3C3, 3S2, 3M6

CERTIFICATE

REACH: REACH compliant

RoHS: RoHS compliant

OTHER

Short Description: Actuator, Ø 40 mm, Mushroom-head, Non illuminated, Red, Plastic, opaque, Round, Black, Plastic, Maintained, Twist to unlock

Dimension: Ø 40 mm


Housing colour: Yellow

Housing material: Plastic

Product attributes: Twist to unlock clockwise

Hints: Application as per DIN EN ISO 13850 and EN 60204-1


Wiring diagrams:

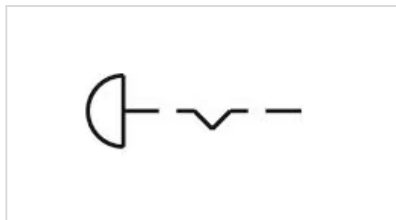

Mounting cut-outs:



Dimension drawings:

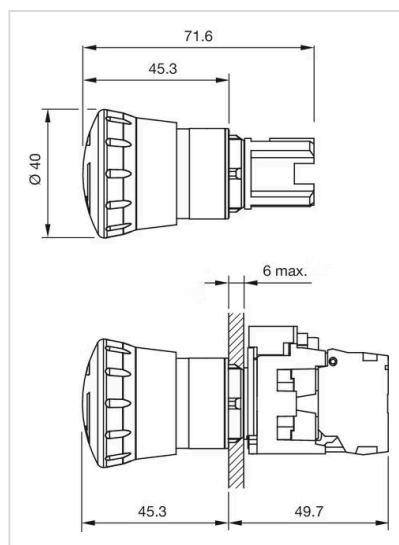

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EAO:](#)

[EUS-45-2C36.1920.000/050](#)