

## Single-LED

10-  
4H21.1034P



<https://eao.com/p/10-4H21.1034P>

Your product:

---



## 10-4H21.1034P Single-LED

### OPERATING-/INDICATION PART

**Illumination colour:** Yellow

### ELECTRICAL CHARACTERISTICS

**Operating voltage:** 72 V AC/DC

**Operation current:** 2,2 mA -30%/+25%

**Lumi. Intensity:** 4 x 112 mcd

### MECHANICAL CHARACTERISTIC

**Weight:** 0.002 kg

### CERTIFICATE

**REACH:** REACH compliant

**RoHS:** RoHS compliant


### OTHER

**Short Description:** Single-LED, BA9s, Yellow, 72 V AC/DC


**Kind of illumination:** Multi-LED EN 50155

**Hints:** A suitable LED remover Part No. 700.006.0, The luminous intensity stated is for when used with DC, Electrical and optical data are measured at 25 °C, The specified 72 and 110 VAC/VDC versions are built with a bridge rectifier, The specified case one LED fails, the other pair of still functioning LED-s is working. The light output then is half in order to indicate the malfunction and shows this way the need for replacement, Luminosity and wave length variations caused by LED manufacturing processes may cause slight differences regarding the illumination. The customer has to decide what resistor shall be used to the LED



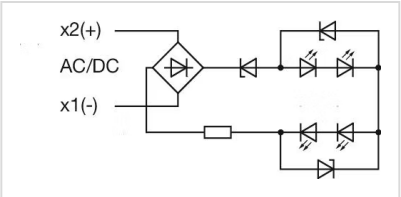



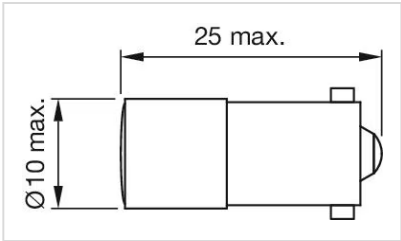


**Wiring diagrams:**



Dimension drawings:



Where to Buy

Distributor		Quantity in Stock		
	DigiKey	10 in stock	Buy	
	Mouser Electronics	1 in stock	Buy	
	Sager	0 in stock	Buy	
	Newark	0 in stock	Buy	
	RS Americas	0 in stock	Buy	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[EAO:](#)

[10-4H21.1034P](#)