


Specification Sheet

Part Number: 169-60305

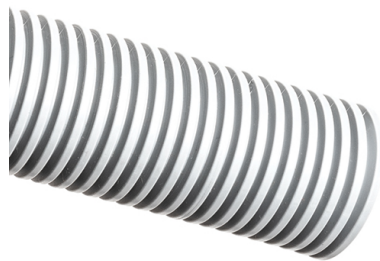

Tubing provides full coverage where spiral wrap or other coverings may not be suitable.

In harsh applications the tubing provides resistance to crushing, impact, and abrasion.

Tubing offers excellent protection against automotive fluids, vibration wear, water, snow, ice, and the effects of heat, cold, and sunlight on cables and wires.

Convoluted Tubing, Flame Retardant, Unslit, 1.0" Dia, PE, Gray, 250 ft/ctn

Article Number	169-60305
Type	CTPFR10UNSLIT
Color	Gray (GY)
Quantity Per	carton

Product Description	HellermannTyton's Convoluted Tubing, also known as Loom Tubing, provides an efficient method of routing and protecting wire harness assemblies. It can also serve to protect valuable hoses and cables. Convoluted tubing offers excellent protection against vibration wear, water, snow, ice and the effects of heat, cold and sunlight on cables and wires. The polyethylene flame-retardant material provides additional protection that is suitable for applications requiring a self-extinguishing material and complies with UL 94 V2 standards.
---------------------	---

Short Description	Convuluted Tubing, Flame Retardant, Unslit, 1.0" Dia, PE, Gray, 250 ft/ctn
Global Part Name	CTPFR10UNSLIT-PE-FR-GY
Length L (Imperial)	250.0
Length L (Metric)	76.2
Variant	Unslit
Inner Diameter D (Imperial)	1.069
Inner Diameter D (Metric)	27.16
Diameter D (Imperial)	1.304
Diameter D (Metric)	33.13
Outside Diameter OD (Imperial)	1.304
Outside Diameter OD (Metric)	33.13
Nominal Diameter (Imperial)	1
Nominal Diameter (Metric)	25.4
Wall Thickness WT (Imperial)	0.006
Wall Thickness WT (Metric)	0.152

Material	Polyethylene, flame retardant (PE-FR)
Material Shortcut	PE-FR
Flammability	UL 94 V-2
Halogen Free	No
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	250
Package Quantity (Metric)	76.20

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HellermannTyton:](#)

[169-60305](#)