

BCY78, VII, VIII, IX, X
BCY79, VII, VIII, IX, X

**SILICON
PNP TRANSISTORS**



TO-18 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR BCY78 and BCY79 series types are silicon PNP epitaxial planar transistors, mounted in a hermetically sealed metal case, designed for low noise amplifier and switching applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$ unless otherwise noted)				
SYMBOL	BCY78	BCY79	UNITS	
Collector-Base Voltage	V_{CB0}	32	45	V
Collector-Emitter Voltage	V_{CEO}	32	45	V
Emitter-Base Voltage	V_{EBO}	5.0		V
Continuous Collector Current	I_C	100		mA
Peak Collector Current	I_{CM}	200		mA
Peak Base Current	I_{BM}	200		mA
Power Dissipation	P_D	340		mW
Power Dissipation ($T_C=25^\circ\text{C}$)	P_D	1.0		W
Operating and Storage Junction Temperature	T_J, T_{stg}	-65 to +200		$^\circ\text{C}$
Thermal Resistance	θ_{JA}	450		$^\circ\text{C/W}$
Thermal Resistance	θ_{JC}	150		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CBO}	$V_{CB}=\text{Rated } V_{CB0}$		15	nA
I_{CBO}	$V_{CB}=\text{Rated } V_{CB0}, T_A=150^\circ\text{C}$		10	μA
I_{EBO}	$V_{EB}=5.0\text{V}$		20	nA
BV_{CBO}	$I_C=10\mu\text{A}$ (BCY78)	32		V
BV_{CBO}	$I_C=10\mu\text{A}$ (BCY79)	45		V
BV_{CEO}	$I_C=2.0\text{mA}$ (BCY78)	32		V
BV_{CEO}	$I_C=2.0\text{mA}$ (BCY79)	45		V
BV_{EBO}	$I_E=1.0\mu\text{A}$	5.0		V
$V_{CE(\text{SAT})}$	$I_C=10\text{mA}, I_B=250\mu\text{A}$		0.25	V
$V_{CE(\text{SAT})}$	$I_C=100\text{mA}, I_B=2.5\text{mA}$		0.80	V
$V_{BE(\text{SAT})}$	$I_C=10\text{mA}, I_B=250\mu\text{A}$	0.60	0.85	V
$V_{BE(\text{SAT})}$	$I_C=100\text{mA}, I_B=2.5\text{mA}$	0.70	1.20	V
$V_{BE(\text{ON})}$	$V_{CE}=5.0\text{V}, I_C=2.0\text{mA}$	0.60	0.75	V

		BCY78-VII BCY79-VII			BCY78-VIII BCY79-VIII		BCY78-IX BCY79-IX		BCY78-X BCY79-X	
		MIN	TYP	MAX	MIN	MAX	MIN	MAX	MIN	MAX
h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\mu\text{A}$	-	140	-	30	-	40	-	100	-
h_{FE}	$V_{CE}=5.0\text{V}, I_C=2.0\text{mA}$	120	-	220	180	310	250	460	380	630
h_{FE}	$V_{CE}=1.0\text{V}, I_C=10\text{mA}$	80	-	-	120	400	160	630	240	1000
h_{FE}	$V_{CE}=1.0\text{V}, I_C=100\text{mA}$	40	-	-	45	-	60	-	60	-

R4 (4-June 2013)

BCY78, VII, VIII, IX, X
BCY79, VII, VIII, IX, X


**SILICON
PNP TRANSISTORS**



ELECTRICAL CHARACTERISTICS - Continued: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
f_T	$V_{CE}=5.0\text{V}$, $I_C=10\text{mA}$, $f=100\text{MHz}$	100		MHz
C_{ob}	$V_{CB}=10\text{V}$, $I_E=0$, $f=1.0\text{MHz}$		7.0	pF
C_{ib}	$V_{EB}=0.5\text{V}$, $I_C=0$, $f=1.0\text{MHz}$		15	pF
NF	$V_{CE}=5.0\text{V}$, $I_C=0.2\text{mA}$, $R_S=2.0\text{k}\Omega$, $f=1.0\text{kHz}$, $B=200\text{Hz}$		10	dB
t_{on}	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$		100	ns
t_d	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$		50	ns
t_r	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$		50	ns
t_{off}	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$		700	ns
t_s	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$		600	ns
t_f	$V_{CC}=3.0\text{V}$, $I_C=10\text{mA}$, $I_{B1}=I_{B2}=1.0\text{mA}$		100	ns
t_{on}	$V_{CC}=10\text{V}$, $I_C=100\text{mA}$, $I_{B1}=I_{B2}=10\text{mA}$		100	ns
t_d	$V_{CC}=10\text{V}$, $I_C=100\text{mA}$, $I_{B1}=I_{B2}=10\text{mA}$		35	ns
t_r	$V_{CC}=10\text{V}$, $I_C=100\text{mA}$, $I_{B1}=I_{B2}=10\text{mA}$		65	ns
t_{off}	$V_{CC}=10\text{V}$, $I_C=100\text{mA}$, $I_{B1}=I_{B2}=10\text{mA}$		400	ns
t_s	$V_{CC}=10\text{V}$, $I_C=100\text{mA}$, $I_{B1}=I_{B2}=10\text{mA}$		300	ns
t_f	$V_{CC}=10\text{V}$, $I_C=100\text{mA}$, $I_{B1}=I_{B2}=10\text{mA}$		100	ns

TO-18 CASE - MECHANICAL OUTLINE

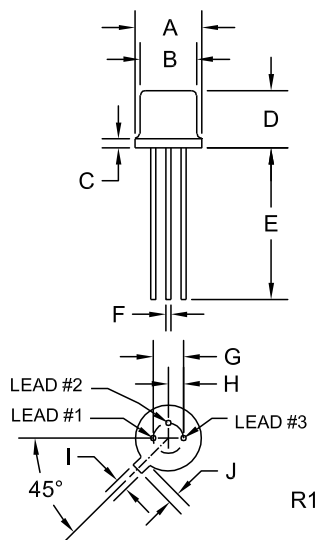

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100	-	2.54	-
H	0.050	-	1.27	-
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (REV: R1)

LEAD CODE:

- 1) Emitter
- 2) Base
- 3) Collector

MARKING:
FULL PART NUMBER

R4 (4-June 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centalsemi.com

Worldwide Field Representatives:
www.centalsemi.com/wwreps

Worldwide Distributors:
www.centalsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centalsemi.com/terms



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01247
Notification Date:	9/01/22
Last Buy Date:	3/01/23
Last Shipment Date	9/01/23

Summary: The following transistors are discontinued and now classified as of End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Portfolio Management. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

*** All Plating types (PBFREE,TIN/LEAD) for each item listed are included in this notice.**

Central Part Number	Suggested Replacement
BCY79-VIII	N/A
CEN853	N/A
CZT32C BK	N/A
CZT32C TR	N/A
2N3583	N/A
2N3584	N/A
2N3585	N/A
2N3738	N/A
2N3740	N/A
2N3741	N/A
2N3741A	N/A
2N4299	N/A
2N4900	N/A
2N6107	N/A
2N6317	N/A
2N6318	N/A
2N6467	N/A
2N6468	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. If you would like assistance, please visit <https://my.centrasemi.com/submit-inquiry?type=ER> to submit an online inquiry.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<https://www.centalsemi.com>

Product End of Life Notification

PDN ID:	PDN01259
Notification Date:	6/26/23
Last Buy Date:	12/26/23
Last Shipment Date	6/26/24

Summary: The BCY79-VII transistor is discontinued and now classified as End of Life (EOL).

Although Central Semiconductor makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by other manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's ongoing Product Portfolio Management. Any replacement products are noted below. The effective date for placing last purchase orders will be six (6) months from the date of this notice and twelve (12) months from the notice date for final shipments, and minimum order quantities may apply. The last purchase and shipment dates may be extended if inventory is available.

*** All Plating types (PBFREE, TIN/LEAD) for each item listed are included in this notice.**

<u>Central Part Number</u>	<u>Suggested Replacement</u>
BCY79-VII	N/A

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. If you would like assistance, please visit <https://my.centalsemi.com/submit-inquiry?type=ER> to submit an online inquiry.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[BCY78-IX](#) [BCY78-VIII](#) [BCY78-VII](#) [BCY79-X](#) [BCY78-X TIN/LEAD](#) [BCY78-IX TIN/LEAD](#) [BCY78-VII TIN/LEAD](#)
[BCY79-VII TIN/LEAD](#) [BCY79-VIII TIN/LEAD](#) [BCY79-X TIN/LEAD](#) [BCY78-VIII TIN/LEAD](#) [BCY79-IX TIN/LEAD](#)
[BCY79 TIN/LEAD](#)