


CURM103-G Thru. CURM107-G

Reverse Voltage: 200 - 1000 Volts

Forward Current: 1.0 Amp

RoHS Device




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Exceeds environmental standard MIL-S-19500/228
- Low leakage current

Mechanical data

- Case: Mini SMA/SOD-123 molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Indicated by cathode band
- Mounting position: Any
- Approx. Weight: 0.04 grams

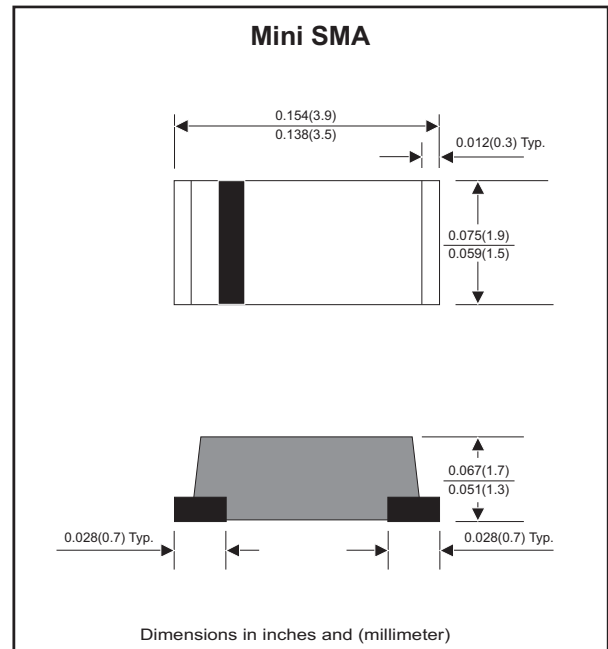

Maximum Ratings and Electrical Characteristics

Parameter		Symbol	CURM 103-G	CURM 104-G	CURM 107-G	Unit
Repetitive Peak Reverse Voltage		VRRM	200	400	1000	V
Continuous reverse voltage		VR	200	400	1000	V
RMS Voltage		VRMS	140	280	700	V
Max. Forward Surge Current 8.3ms single half sine-wave superimposed on rate load (JEDEC method)		IFSM	30			A
Max. Forward rectified Current		Io	1.0			A
Max. Forward voltage at IF=1.0A		VF	1.0	1.3	1.7	V
Max. Reverse recovery time (Note 1)		Trr	50		75	nS
Max. Reverse Current	VR=VRRM, TJ=25°C	IR	5.0			μA
	VR=VRRM, TJ=125°C	IR	150			
TYP. Thermal Resistance (Note 1)		RθJA	42			°C/W
TYP. Diode Junction Capacitance (F=1MHz and applied 4V DC reverse voltage)		C J	20			pF
Operating Junction Temperature		T J	-55 to +150			°C
Storage Temperature		TSTG	-65 to +175			°C

Note 1: Reverse recovery time test Condition, I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Company reserves the right to improve product design, functions and reliability without notice.

REV:C

Rating and Characteristic Curves (CURM103-G Thru CURM107-G)

Fig.1 - Typical Forward Characteristics

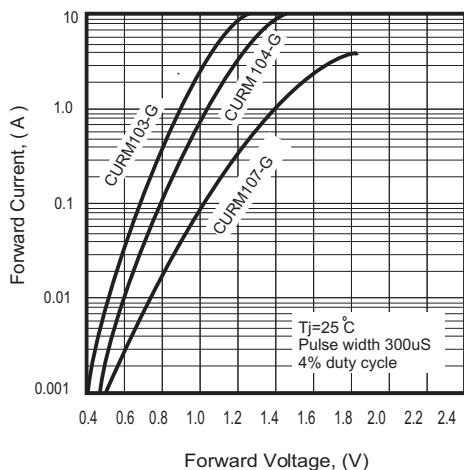


Fig. 2 - Typical Forward Current Derating Curve


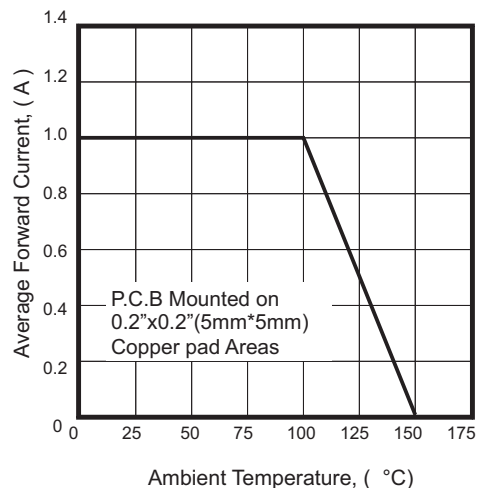


Fig. 3 - Test Circuit Diagram and Reverse Recovery Time Characteristics

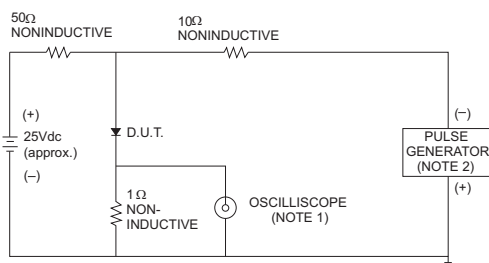

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

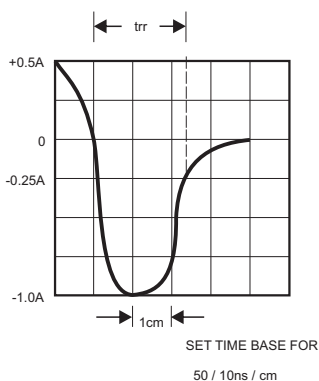


Fig. 4 - Maximum Non-Repetitive Forward Surge Current



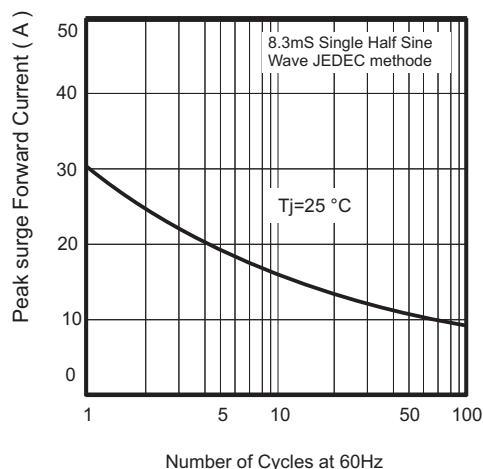


Fig.5 - Typical Junction Capacitance

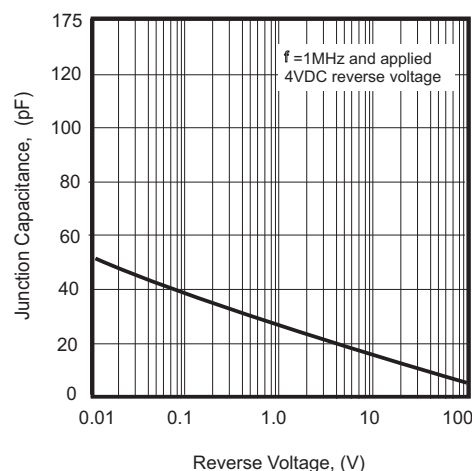

Reel Taping Specification

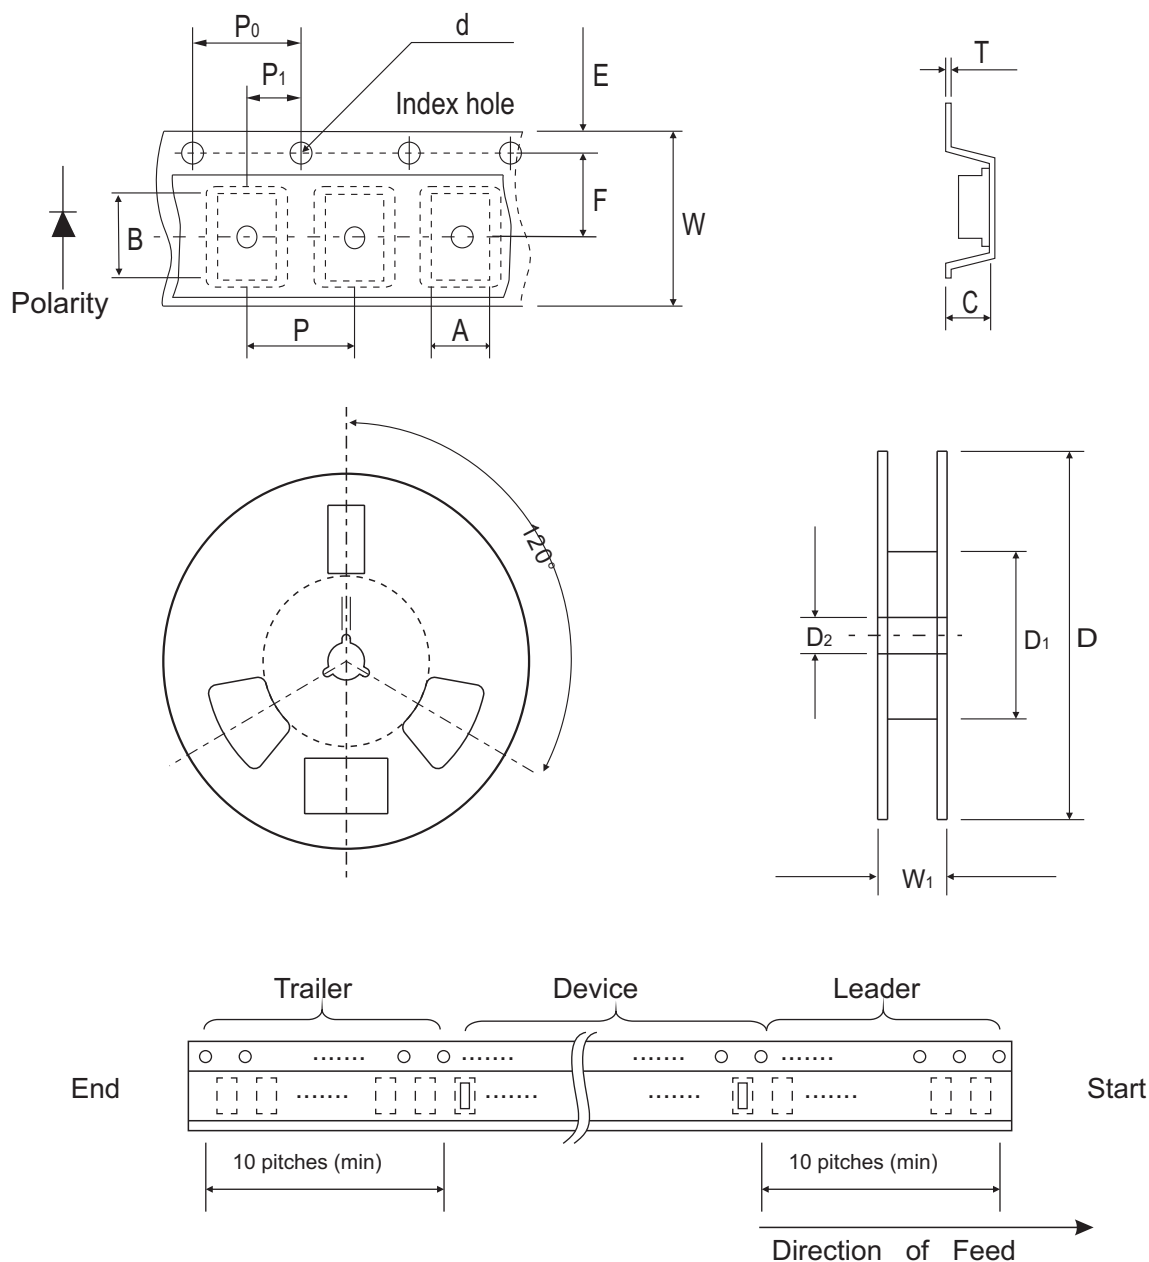

Mini-SMA/ SOD-123	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	1.90 ± 0.10	3.90 ± 0.10	1.68 ± 0.10	1.50 ± 0.10	178 ± 2.00	62.0 MIN.	13.0 ± 0.50
	(inch)	0.075 ± 0.04	0.154 ± 0.04	0.066 ± 0.04	0.059 ± 0.004	7.00 ± 0.079	2.440 MIN.	0.512 ± 0.020

Mini-SMA/ SOD-123	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	0.23 ± 0.10	8.00 ± 0.30	11.40 ± 1.0
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.009 ± 0.004	0.315 ± 0.012	0.449 ± 0.039

Marking Code


Part Number	Marking Code
CURM103-G	H3
CURM104-G	H4
CURM107-G	H7



XX = Product type marking code

Suggested PAD Layout

SIZE	Mini-SMA/SOD-123	
	(mm)	(inch)
A	3.30	0.130
B	1.40	0.055
C	1.90	0.075
D	4.70	0.185
E	1.90	0.075

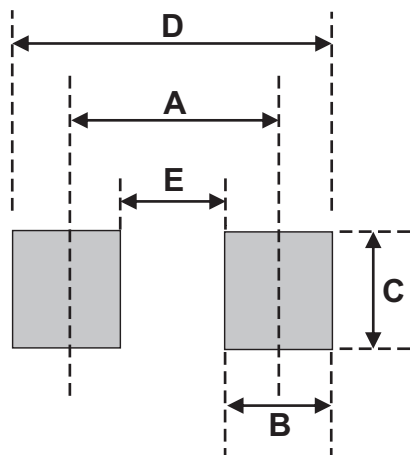

Standard Packaging

Case Type	Qty per Reel	Reel Size
	(Pcs)	(inch)
Mini-SMA/SOD-123	2,500	7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[CURM103-G](#)