


FEATURES

Small Size – Long Life

APPLICATIONS

Filtering – Bypass/ Coupling – De-Coupling

Operating Temperature Range		-55°C to +105°C					
Capacitance Tolerance		+20% at 120 Hz, 20°C					
Surge Voltage	WVDC	6.3	10	16	25	35	50
	SVDC	7.9	13	20	32	44	63
Dissipation Factor	WVDC	6.3	10	16	25	35	50
		.32	.24	.2	.16	.13	.12
Leakage Current		2 Minutes					
		.01CV or 3uA, Whichever is greater					
Low Temperature Stability Impedance Ratio (120 Hz)	Rated WVDC	6.3	10	16	25	35	50
	-25°C to +20°C	4	3	2	2	2	2
	-40°C to +20°C	10	7	5	3	3	3
Load Life		5000 hours(3000 hours for D=4,5,6.3mm) at 105°C with rated WVDC					
		Capacitance Change	≤30% of initial measured value				
		Dissipation Factor	≤300% of maximum specified value				
		Leakage Current	≤100% of maximum specified value				
Shelf Life		1000 hours at 85°C with no voltage applied					
		Capacitance Change	≤30% of initial measured value				
		Dissipation Factor	≤300% of maximum specified value				
		Leakage Current	≤100% of maximum specified value				
Resistance to Soldering Heat		Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminations facing downward will fulfill the following conditions after being cooled to room temperature					
		Capacitance Change	≤10% of initial measured value				
		Dissipation Factor	≤100% of maximum specified value				
		Leakage Current	≤100% of maximum specified value				
Ripple Current Multipliers		Frequency (Hz)					
		50	120	300	1k	100k	
		.7	1.0	1.17	1.36	1.5	

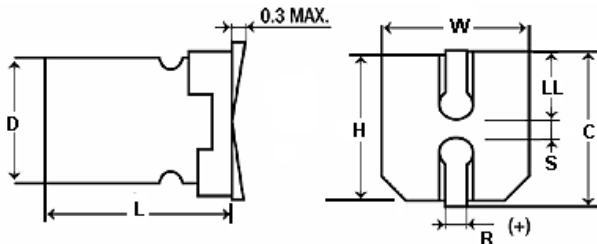

D	L	W±0.2	H±0.2	C±0.2	R	LL±0.2	S±0.2
4	5.8 +0.1/-0.2	4.3	4.3	5.0	0.5-0.8	1.8	1.0
5	5.8 +0.1/-0.2	5.3	5.3	6.0	0.5-0.8	2.1	1.3
6.3	5.8 +0.1/-0.2	6.6	6.6	7.3	0.5-0.8	2.4	2.2
6.3	7.7 +0.1/-0.2	6.6	6.6	7.3	0.5-0.8	2.4	2.2
8	10.5+0.1/-0.2	8.3	8.3	9.0	0.7-1.0	2.9	3.1
10	10.5+0.1/-0.2	10.3	10.3	11.0	0.7-1.0	3.2	4.5

SVL

+105°C, Long Life, up to 5000 hours

WVDC	Capacitance (µF)	IC PART NUMBER	Maximum ESR (Ω) 120 Hz, +20°C	Maximum RMS Ripple Current (mA) 120 Hz, +105°C	Dims DxL (mm)
6.3	47	476SVL6R3MDW	11.29	45	5x5.8
6.3	220	227SVL6R3MEL	2.41	105	6.3x7.7
6.3	330	337SVL6R3MFE	1.61	245	8x10.5
6.3	1000	108SVL6R3MGW	0.53	350	10x10.5
10	33	336SVL010MDW	12.06	40	5x5.8
10	100	107SVL010MEW	3.98	75	6.3x5.8
10	220	227SVL010MFE	1.81	170	8x10.5
16	10	106SVL016MCW	33.16	20	4x5.8
16	22	226SVL016MDW	15.07	35	5x5.8
16	47	476SVL016MEW	7.05	60	6.3x5.8
16	100	107SVL016MEL	3.32	90	6.3x7.7
16	470	477SVL016MGW	0.71	360	10x10.5
25	33	336SVL025MEW	8.04	50	6.3x5.8
25	47	476SVL025MEL	5.64	65	6.3x7.7
25	100	107SVL025MFE	2.65	140	8x10.5
25	330	337SVL025MGW	0.8	250	10x10.5
35	4.7	475SVL035MCW	45.6	20	4x5.8
35	10	106SVL035MDW	21.55	30	5x5.8
35	22	226SVL035MEW	9.8	50	6.3x5.8
35	33	336SVL035MEL	6.53	62	6.3x7.7
35	220	227SVL035MGW	0.98	230	10x10.5
50	1	105SVL050MCW	198.94	8	4x5.8
50	2.2	225SVL050MCW	90.43	12	4x5.8
50	3.3	335SVL050MCW	90.29	17	4x5.8
50	4.7	475SVL050MDW	42.33	21	5x5.8
50	10	106SVL050MEW	19.89	35	6.3x5.8
50	22	226SVL050MEL	9.04	52	6.3x7.7
50	33	336SVL050MFE	6.03	80	8x10.5
50	47	476SVL050MFE	4.23	95	8x10.5
50	100	107SVL050MGW	1.99	99	10x10.5

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cornell Dubilier:

[105SVL050MCW](#) [106SVL016MCW](#) [106SVL035MDW](#) [106SVL050MEW](#) [107SVL010MEW](#) [107SVL016MEL](#)
[107SVL025MFE](#) [107SVL050MGW](#) [108SVL6R3MGW](#) [225SVL050MCW](#) [226SVL016MDW](#) [226SVL035MEW](#)
[226SVL050MEL](#) [227SVL010MFE](#) [227SVL035MGW](#) [227SVL6R3MEL](#) [335SVL050MCW](#) [336SVL010MDW](#)
[336SVL025MEW](#) [336SVL035MEL](#) [336SVL050MFE](#) [337SVL6R3MFE](#) [475SVL035MCW](#) [475SVL050MDW](#)
[476SVL016MEW](#) [476SVL025MEL](#) [476SVL050MFE](#) [476SVL6R3MDW](#) [477SVL016MGW](#)