



CORE DIMENSIONS(SPEC): mm [in]

A	14.99 [.590]	+	0.23 [.009]
B	6.76 [.266]	+	0.25 [.010]
C	28.83 [1.135]	+	0.51 [.020]
D	7.49 [.295]	+	0.18 [.007]



CASE DIMENSIONS(SPEC): mm [in]


A	21.00 [.827]	+	0.25 [.010]
B	6.80 [.268]	+	0.25 [.010]
C	41.70 [1.642]	+	0.50 [.020]
D	21.00 [.827]	+	0.50 [.020]
E	4.85 [.191]	+	Ref.

*NET IMPEDANCE (Z)

Frequency	300 MHz	500 MHz	1 GHz
Nominal (REF)	275 Ω	340 Ω	200 Ω
Minimum	- Ω	272 Ω	- Ω

* NET IMPEDANCE IS IMPEDANCE OF THE FERRITE CORE ONLY. ALL IMPEDANCE CONTRIBUTION FROM TEST WIRE AND FIXTURES HAS BEEN REMOVED.

NET Z,R AND X vs. FREQUENCY (REF. ONLY)

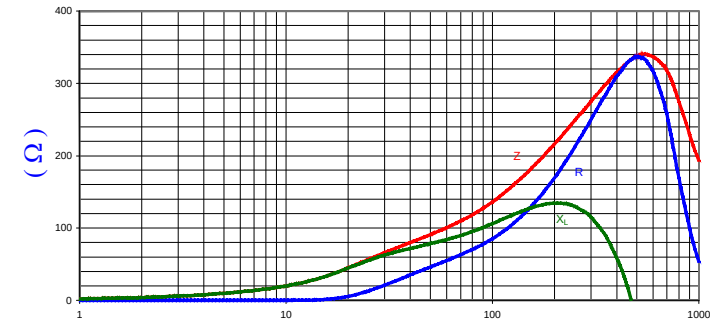

FREQUENCY (MHz)

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture REF 2927

NOTES:

1. ASSEMBLED PART #: HFA150068-0A2
2. CASE COLOR: BLACK - "0A2"

DIMENSIONS ARE IN mm[INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
Laird			
C	UPDATED LOGO	03/13/13	QIU
B	REMOVE NOTES 1, 3, & 5 REMOVE CORE & CASE P/Ns REV CASE DIMS & TOLS ADD DIM E TO CASE ADJUST CORE DIM B, C, & D TOLERANCES	05/15/06	TMB
A	ORIGINAL DRAFT	09/02/04	JRK
REV	DESCRIPTION	DATE	INT
PROJECT/PART NUMBER: HFA150068-0A2		DATE: 09/02/04	SCALE: NTS
REV C		PART TYPE: FERRITE SNAP-ON	MATERIAL: NiZn Ferrite
DRAWN BY: JRK		CAD # HFA150068-0A2-C	TOOL #

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Laird Performance Materials:](#)

[HFA150068-0A2](#)