



Wireless and batteryless package, Harmony XB5R, Wireless metal 22mm black pushbutton, non configurable receiver, 24V DC

XB4RFB01

Main

Range of product	Harmony XB4R	
Product or component type	Wireless and batteryless package	
Device short name	XB4R	
Head material	Metal	
frequency	2405 MHz for transmitter 2405 MHz for receiver	
emission class	5M00G7W	
Antenna type	Omnidirectional	

Complementary

Control type	Wireless and batteryless push-button Ø 22 mm assembled on fixing collar	
Type of receiver	Non-programmable receiver (1 relay)	
[Us] rated supply voltage	24 V DC	
Kit composition	1 fixing collars 1 diameter: 22 mm 1 push-button head diameter: 22 mm 1 transmitter 1 receiver 1 set of caps	
Communication port protocol	Zigbee conforming to IEEE 802.15.4	
Max power consumption in W	1 mW	
Number of channels	1	
Modulation Technique	O-QPSK	
Bandwidth	5 MHz	
Antenna gain	0 dBi	
[Us] rated supply voltage	24 V	

Environment

Product certifications	CCC C-Tick GOST CSA UL
Marking	CE
Standards	UL 508 IEC 60947-1 CSA C22.2 No 14 IEC 60947-5-1

Radio agreement	ARIB T66	
	RSS	
	ICASA	
	SRRC	
	FCC	
	ANATEL	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.300 cm
Package 1 Width	10.500 cm
Package 1 Length	11.000 cm
Package 1 Weight	235.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	16
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.000 kg

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint

Environmental Disclosure

Product Environmental Profile

Use Better


Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	25b7f895-3732-43c8-9910-ef6005058640
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again

○ Repack and remanufacture		
End of life manual availability	End of Life Information	
Take-back	No	
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	

Dimensions Drawings


Non-Programmable Receiver






Wireless and Batteryless Pushbutton - Transmitter

With Metal Pushbutton without Cap






e: panel thickness 1 to 6 mm / 0.039 to 0.24 in.


Mounting and Clearance

Receiver Clearance



- (1) Drive(2) Power Supply or PLC


Receiver Mounting

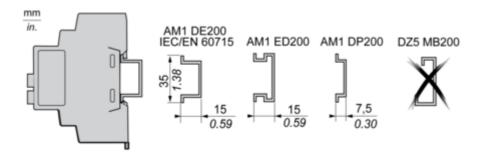

Connections and Schema

Non-Programmable Receiver


Wiring Diagram



- (1) 125 mA fast-blow fuse
- (2) Imax = 3 A

Technical Illustration

Dimensions

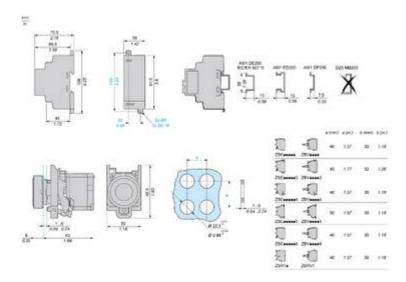

Technical Illustration

Wiring diagram

