Disclaimer. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications



connection sub-base ABE7 - for distribution of 4 analog output channels

ABE7CPA21

Main

Range of product	Modicon ABE7	
Product or component type	Connection sub-base for counter and analogue channels	
Number of channels	4	
Connections - terminals	Screw type terminals, 1 x 0.091 x 1.5 mm² (AWG 28AWG 16) flexible with cable end	
	Screw type terminals, 1 x 0.141 x 2.5 mm² (AWG 26AWG 12) solid	
	Screw type terminals, 1 x 0.141 x 2.5 mm² (AWG 26AWG 14) flexible without cable end	
	Screw type terminals, 2 x 0.092 x 0.75 mm² (AWG 28AWG 20) flexible with cable end	
	Screw type terminals, 2 x 0.22 x 2.5 mm ² (AWG 24AWG 14) solid	

Complementary

Function of module	Analogue output current, compatible with Premium Analogue output voltage, compatible with Premium	
Product compatibility	Premium TSXAEY420 Premium TSXASY410	
Connection to PLC	SUB-D 25	
Fixing mode	By clips (35 mm symmetrical DIN rail) By screws (solid plate with fixing kit)	
[Ui] rated insulation voltage	2000 V terminals/mounting rails	
Installation category	II conforming to IEC 60664-1	
Tightening torque	0.6 N.m with flat Ø 3.5 mm screwdriver	
Product weight	0.18 kg	

Environment

Product certifications	DNV GL CSA UL EAC	
IP degree of protection	IP20 conforming to IEC 60529	
Protective treatment	тс	
Resistance to incandescent wire	750 °C, extinction time <30 s conforming to IEC 60695-2-11	
Shock resistance	15 gn for 11 ms conforming to IEC 60068-2-27	
Vibration resistance	2 gn (f= 10150 Hz) conforming to IEC 60068-2-6	
Resistance to electrostatic discharge	4 kV (contact) level 3 conforming to IEC 61000-4-2 8 kV (air) level 3 conforming to IEC 61000-4-2	
Resistance to radiated fields	10 V/m (260000001000000000 Hz) conforming to IEC 61000-4-3 level 3	

Resistance to fast transients	2 kV level 3 conforming to IEC 61000-4-4	
Ambient air temperature for operation	060 °C conforming to IEC 61131-2	
Ambient air temperature for storage	-4080 °C conforming to IEC 61131-2	
Pollution degree	2 conforming to IEC 60664-1	

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.000 cm
Package 1 Width	8.300 cm
Package 1 Length	9.600 cm
Package 1 Weight	218.000 g
Unit Type of Package 2	S03
Number of Units in Package 2	36
Package 2 Height	30.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	8.350 kg

Contractual warranty

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Total lifecycle Carbon footprint	1036
Environmental Disclosure	Product Environmental Profile

Use Better

⊗ Materials and Substances	
Packaging made with recycled cardboard	No
Packaging without single use plastic	No
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
SCIP Number	11b66df7-80cd-4614-acd8-17183a716ce1
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


Use Again


○ Repack and remanufacture	
End of life manual availability	End of Life Information
Take-back	No
WEEE Label	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Dimensions

mm in.

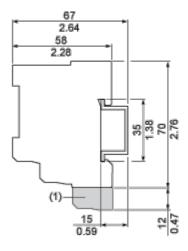




(1) ABE7BV20

Mounting and Clearance


Mounting

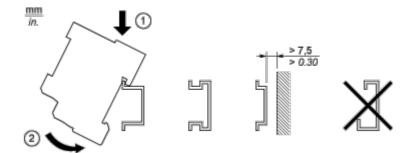

ABE7CPA21

Connections and Schema

Wiring Recommendations

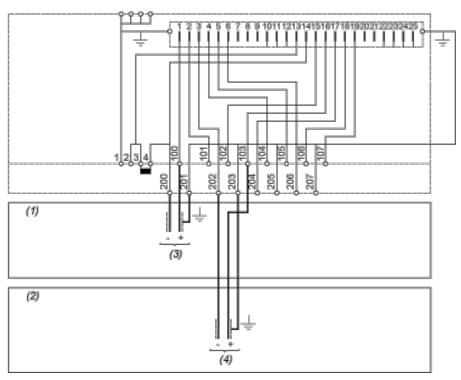

- (1) 4 input voltage 4 output voltage
- (2) 4 input current 4 output current
- (3) Channel via 1
- (4) Channel via 2

Image of product / Alternate images

Alternative

