

Empty pendant control station, Harmony XAC, plastic, yellow, 3 cut outs, UL CSA certified

XACA03H7

Product availability: Stock - Normally stocked in distribution facility

#### Main

Range of Product	Harmony XAC
Product or Component Type	Pendant control station
Device short name	XACA

### Complementary

Control station type	Double insulated
Enclosure Material	Polypropylene
Electrical circuit type	Control circuit
Enclosure Type	Empty enclosure
Number of cut-out	3 cut-outs
Control station colour	Yellow
Cable entry	Rubber sleeve with stepped entry 0.31.02 in (826 mm)
Guard rail	Without
Vertical operator cut-out centre	1.2 in (30 mm)
Standards	UL 508 IEC 60204-32 CSA C22.2 No 14 IEC 60947-5-1
Product Certifications	CSA GOST UL CCC
Protective treatment	тн
Ambient Air Temperature for Operation	-13158 °F (-2570 °C)
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)
Vibration resistance	15 gn (f= 10500 Hz) conforming to IEC 60068-2-6
Shock resistance	100 gn IEC 60068-2-27
Overvoltage category	Class II conforming to IEC 61140
IP degree of protection	IP65 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262
Mechanical durability	1000000 cycles
Net Weight	0.97 lb(US) (0.44 kg)

### Ordering and shipping details

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Category	US10CS222473
Discount Schedule	0CS2
GTIN	3389118117686
Returnability	Yes
Country of origin	CZ

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.35 in (8.500 cm)
Package 1 Width	3.54 in (9.000 cm)
Package 1 Length	17.52 in (44.500 cm)
Package 1 Weight	17.637 oz (500.000 g)

## **Contractual warranty**

Warranty 18 months



Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

#### Environmental Data explained >

How we assess product sustainability >

☑ Environmental footprint	
Carbon footprint (kg CO2 eq, Total Life cycle)	3
Environmental Disclosure	Product Environmental Profile

#### **Use Better**

Materials and Substances	
Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
REACh Regulation	REACh Declaration
California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

#### Use Again


○ Repack and remanufacture	
Circularity Profile	No need of specific recycling operations
Take-back	No

#### XACA03H7

#### **Dimensions Drawings**

#### **Dimensions**

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

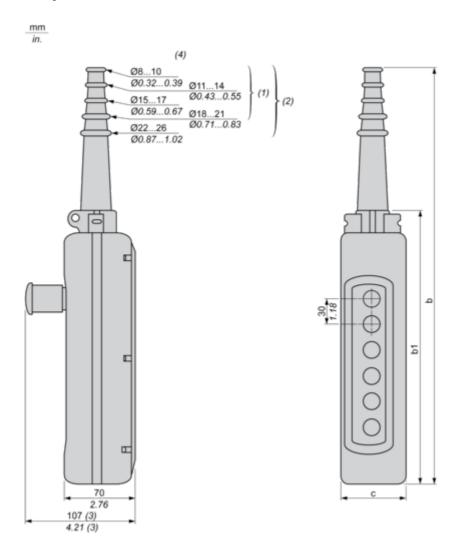

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal ø

#### Dimensions in mm

Number of cut-outs	2	3	4	5	6	8	12
b	314	314	440	440	500	560	680
b1	190	190	250	250	310	370	490
С	80	80	80	80	80	80	92

#### Dimensions in in.

Number of cut-outs	2	3	4	5	6	8	12
b	12.36	12.36	17.32	17.32	19.68	22.05	26.77
b1	7.48	7.48	9.84	9.84	12.20	14.57	19.29

### **Product data sheet**

### XACA03H7

Number of cut-outs	2	3	4	5	6	8	12
С	3.15	3.15	3.15	3.15	3.15	3.15	3.62

Image of product / Alternate images

**Alternative** 





# Product data sheet

### XACA03H7





### XACA03H7



