

SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting



1422832

<https://www.phoenixcontact.com/us/products/1422832>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector rear mounting, 5-position, coding: A, on free cable end, Rear wall/screw mounting, M16 x 1.5, Cable connection, cable length: 0.5 m, this item is expected to be lead-free from Q1 2027 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance

Commercial data

Item number	1422832
Packing unit	1 pc
Minimum order quantity	50 pc
Product key	ABQDGG
GTIN	4055626320465
Weight per piece (including packing)	64.6 g
Weight per piece (excluding packing)	48.084 g
Country of origin	DE

SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting



1422832

<https://www.phoenixcontact.com/us/products/1422832>

Technical data

Notes

Notes on operation	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
Order information:	Lock nut is included in the scope of delivery

Safety note

Safety note	<p>WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none">• WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.• WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.• The products are suitable for applications in plant, controller, and electrical device engineering.• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.• Assembled products may not be manipulated or improperly opened.• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).• When using the product in direct connection with third-party manufacturers, the user is responsible.• For operating voltages > 50 V AC, conductive connector housings must be grounded• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.• Observe the corresponding technical data. You will find information:<ul style="list-style-type: none">o On the producto On the packing labelo In the supplied documentationo Online at phoenixcontact.com/products under the product• Only use tools recommended by Phoenix Contact• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory
-------------	--

SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting



1422832

<https://www.phoenixcontact.com/us/products/1422832>

section of the product at [phoenixcontact.com/products](https://www.phoenixcontact.com/products)

- Ensure that the protective or functional ground has been properly connected.

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector

- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

Mounting

Mounting type

Rear wall/screw mounting M16 x 1.5

Product properties

Product type

Circular connectors (device side)

Number of positions

5

Coding

A

Insulation characteristics

Overvoltage category

III

Degree of pollution

3

Electrical properties

Rated surge voltage

1.5 kV AC

Nominal voltage U_N

60 V

Nominal current I_N

4 A

Connection data

Conductor connection

Connection method

Cable connection

Contact connection type

Socket

Connector

Connection 2

Head design

free cable end

Cable/line

Cable length

0.5 m

Environmental and real-life conditions

Ambient conditions

Degree of protection

IP67 (When plugged in)

IP65 (When plugged in)

SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting



1422832

<https://www.phoenixcontact.com/us/products/1422832>

Ambient temperature (operation)	-25 °C ... 85 °C
UL Type Rating	Type 4 (indoor use only)

Standards and regulations

Standard designation	M12 circular connector
Standards/specifications	according to IEC 61076-2-101


SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting

1422832

<https://www.phoenixcontact.com/us/products/1422832>

Drawings

Schematic diagram

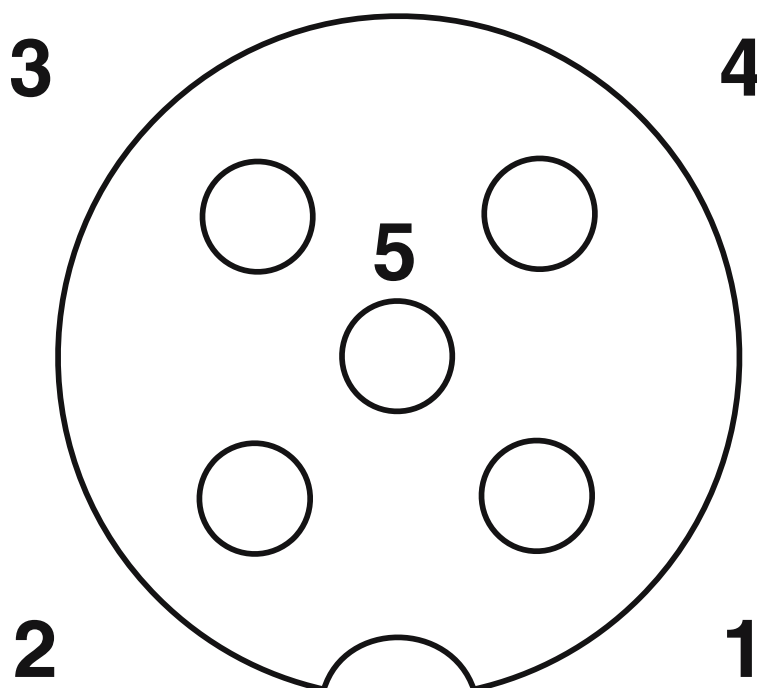

Pin assignment M12 socket, 5-pos., A-coded, socket side view

SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting



1422832
<https://www.phoenixcontact.com/us/products/1422832>

Classifications

ECLASS

ECLASS-13.0	27440103
-------------	----------

ETIM

ETIM 9.0	EC003570
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

SACCBP-M12FS-5CON-M16/0,5-923 - Device connector rear mounting



1422832

<https://www.phoenixcontact.com/us/products/1422832>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	361434df-d190-4e51-a442-efea731754ee

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com