

1607275

https://www.phoenixcontact.com/us/products/1607275

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable connector, straight, Screw locking mechanism, M23, number of positions: 12, contact connection type: Socket, shielded: yes, degree of protection: IP67, cable diameter range: 9 mm . . . 13.2 mm, number of positions: 12, connection method: Crimp connection, series: RF, this item is expected to be lead-free from Q3 2026 in accordance with RoHS II without exception 6c (Pb < 0.1%), a lead-free alternative is possible on request in advance, This product is in the process of being discontinued. This product must no longer be considered for new projects. Please contact your sales representative for alternatives.

### Commercial data

Item number	1607275
Packing unit	20 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Sales key	AB31
Product key	ABRAGA
GTIN	4046356268448
Weight per piece (including packing)	97.69 g
Weight per piece (excluding packing)	90.943 g
Customs tariff number	85366990
Country of origin	DE



1607275

https://www.phoenixcontact.com/us/products/1607275

### Technical data

#### Notes

	Order information:	Order crimp contacts Ø 1 mm separately
Pr	oduct properties	
	Product type	Circular connector (cable-side)

Froduct type	Circular Confidencial (Cable-Side)
Series	RF
Application	Feedback, signal
	Signal
Number of positions	12
Connection profile	12
Shielded	yes
Coding	N
Thread type	M23

### Material specifications

Material Housing	GD-Zn
Material Rotating parts	CuZn
Material Housing surface	Ni
Material Insulating body	PA 6.6
Material Seal	FPM (O-ring)
Seal material	FPM

### Connection data

Conductor connection

Connection method	Crimp connection

### Electrical properties

#### Contact

Contact diameter	1 mm
Nominal current I <sub>N</sub>	8 A
Nominal voltage U <sub>N</sub>	48 V AC
	74 V DC
Overvoltage category	III
Degree of pollution	3
Rated surge voltage	1.5 kV

### Connector

Туре	straight
Direction of rotation	Standard
Connection 1	



1607275

Altitude

https://www.phoenixcontact.com/us/products/1607275

Head design	Socket
Head cable outlet	straight
Head thread type	M23
Cable/line	
External cable diameter	9 mm 13.2 mm
Environmental and real-life conditions  Ambient conditions	
Degree of protection	IP67
Ambient temperature (operation)	-40 °C 125 °C

2000 m




https://www.phoenixcontact.com/us/products/1607275




## Drawings

### Dimensional drawing

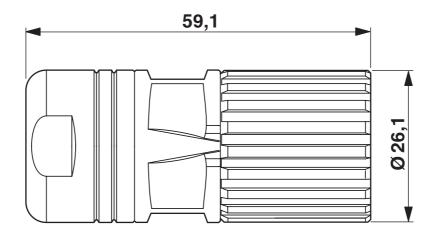

Dimensional drawing

Schematic diagram

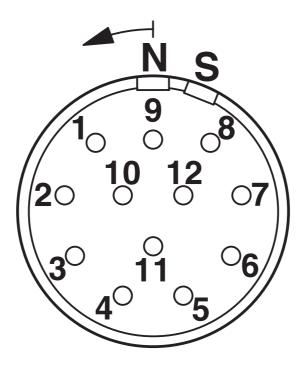

Connector pin assignment



1607275

https://www.phoenixcontact.com/us/products/1607275

### **Approvals**

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1607275

cUL Recognized Approval ID: E153698-20090723					
	Nor	minal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
	48 \	V	5 A	20	-

<b>7.1</b>	UL Recognized Approval ID: E153698-20090723				
		Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
keine					
		48 V	5 A	20	-



1607275

https://www.phoenixcontact.com/us/products/1607275

## Classifications

### **ECLASS**

	ECLASS-13.0	27440116
	ECLASS-15.0	27440116
ΕΊ	ГІМ	
	ETIM 9.0	EC002635
U	NSPSC	
	UNSPSC 21.0	39121400



1607275

https://www.phoenixcontact.com/us/products/1607275

### Environmental product compliance

#### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	f24acf2c-1d2c-4069-b42b-171bae40080a

Phoenix Contact 2025 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com