

3060527

https://www.phoenixcontact.com/us/products/3060527

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Fuse modular terminal block, fuse type: Glass / ceramics / ..., fuse type: G / 5 x 20, nom. voltage: 500 V, nominal current: 6.3 A, connection method: Screw connection, Rated cross section: 4 mm 2 , cross section: 0.14 mm 2 - 6 mm 2 , mounting type: NS 35/7,5, NS 35/15, color: blue

Commercial data

Item number	3060527
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1134
GTIN	4046356623377
Weight per piece (including packing)	16.996 g
Weight per piece (excluding packing)	16.996 g
Customs tariff number	85369095
Country of origin	DE



3060527

https://www.phoenixcontact.com/us/products/3060527

Technical data

Product properties

Product type	Fuse terminal block
Product family	UT
Number of connections	2
Number of rows	1
Potentials	1
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3

Electrical properties

Fuse type	Glass / ceramics /
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	1.02 W
Fuse	G / 5 x 20
Maximum power dissipation	max. 1.6 W (with single arrangement of the fuse terminal block in the event of overload)
	max. 1.6 W (With interconnected arrangement of several fuse terminal blocks in the event of overload)
	max. 4 W (with single arrangement of the fuse terminal block in the event of a short-circuit)
	max. 2.5 W (With interconnected arrangement of several fuse terminal blocks in the event of a short-circuit)

Connection data

Number of connections per level	2
Nominal cross section	4 mm²
Connection method	Screw connection
Screw thread	M3
Tightening torque	0.6 0.8 Nm
Stripping length	9 mm
Internal cylindrical gage	A4
Connection in acc. with standard	IEC 60947-7-3
Conductor cross-section rigid	0.14 mm² 6 mm²
Cross section AWG	26 10 (converted acc. to IEC)
Conductor cross-section flexible	0.14 mm² 6 mm²
Conductor cross-section, flexible [AWG]	26 10 (converted acc. to IEC)
Conductor cross-section flexible ultrasound-compressed	0.34 mm² 6 mm²
Conductor cross-section, flexible [AWG] ultrasound-compressed	22 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.25 mm² 4 mm²
Flexible conductor cross-section (ferrule with plastic sleeve)	0.14 mm² 4 mm²
2 conductors with same cross section, solid	0.14 mm² 1.5 mm²



3060527

https://www.phoenixcontact.com/us/products/3060527

2 conductors with same cross section, flexible	0.14 mm² 1.5 mm²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.14 mm² 1.5 mm²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ² 1.5 mm ²
Nominal current	6.3 A
Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal voltage	500 V (The voltage is determined by the fuse or selected LED display)
Nominal cross section	4 mm²

Dimensions

Width	6.2 mm
Height	57.8 mm
Depth on NS 35/7,5	73 mm
Depth on NS 35/15	80.5 mm

Material specifications

Color	blue (RAL 5015)
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Open side panel	No

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-60 °C 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)



3060527

https://www.phoenixcontact.com/us/products/3060527

Ambient temperature (assembly)	-5 °C 70 °C
Ambient temperature (actuation)	-5 °C 70 °C
Permissible humidity (operation)	20 % 90 %
Permissible humidity (storage/transport)	30 % 70 %
Standards and regulations	
Connection in acc. with standard	IEC 60947-7-3
Mounting	
Mounting type	NS 35/7,5
	NS 35/15




3060527

https://www.phoenixcontact.com/us/products/3060527

Drawings

Application drawing

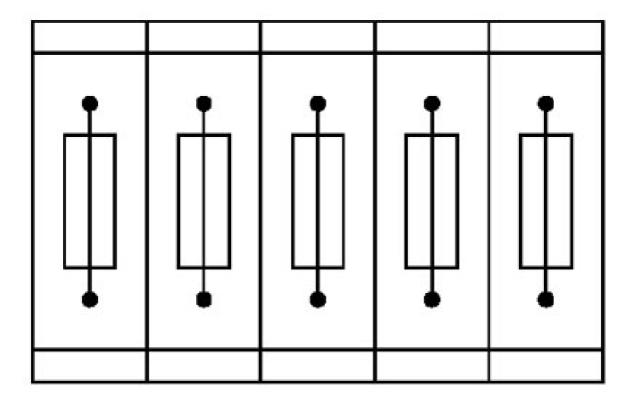


Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks



3060527

https://www.phoenixcontact.com/us/products/3060527

Application drawing

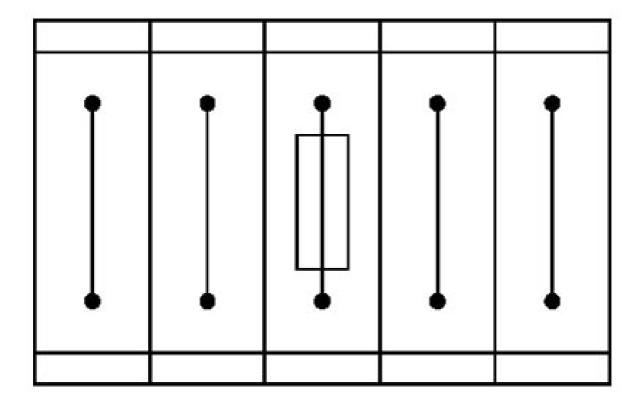


Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks



3060527

https://www.phoenixcontact.com/us/products/3060527

Circuit diagram

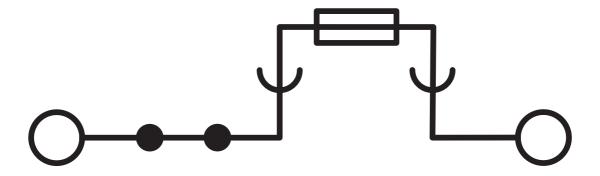



3060527

https://www.phoenixcontact.com/us/products/3060527

Approvals

🌣 To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/3060527

Approval ID: TAE00001S9



CSA

Approval ID: 13631

CB scrieme	IECEE CB Scheme Approval ID: NL-65056)			
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		500 V	6.3 A	-	0.14 - 4



cULus Recognized

Approval ID: E60425

KEUR	KEMA-KEUR Approval ID: 71-113330				
		Nominal voltage U_N	Nominal current I _N	Cross section AWG	Cross section mm ²
keine					
		500 V	6.3 A	-	0.14 - 4



LR

Approval ID: LR24100022TA



CSA

Approval ID: 13631



cULus Recognized

Approval ID: E60425



3060527

https://www.phoenixcontact.com/us/products/3060527

Classifications

ECLASS

	ECLASS-13.0	27250113	
	ECLASS-15.0	27250113	
ETIM			
	1114		
	ETIM 9.0	EC000899	
LINIODOG			
Uľ	NSPSC		
	UNSPSC 21.0	39121400	

Nov 14, 2025, 5:04□AM Page 9 (10)



3060527

https://www.phoenixcontact.com/us/products/3060527

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes	
Exemption	6(c)	
China RoHS		
Environment friendly use period (EFUP)	EFUP-50	
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	
EU REACH SVHC		
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)	
SCIP	0a4324e9-ef9b-4bf1-be0e-752c5da1af68	

Phoenix Contact 2025 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com