


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL INTERCONNECT PRODUCTS CORP. ANY REPRODUCTION OR DISCLOSURE, TO THIRD PARTIES, IN PART OR WHOLE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL INTERCONNECT PRODUCTS CORP. IS PROHIBITED.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE PER EO 23623	9/06	DEC
B	REVISED PER ECN 25187	1/08	DEC
C	REVISED PER ECN 303605	12/12	DEC
D	REVISED PER ECN 303722	1/13	DCB
E	REVISED PER ECN 305927	12/14	DCB

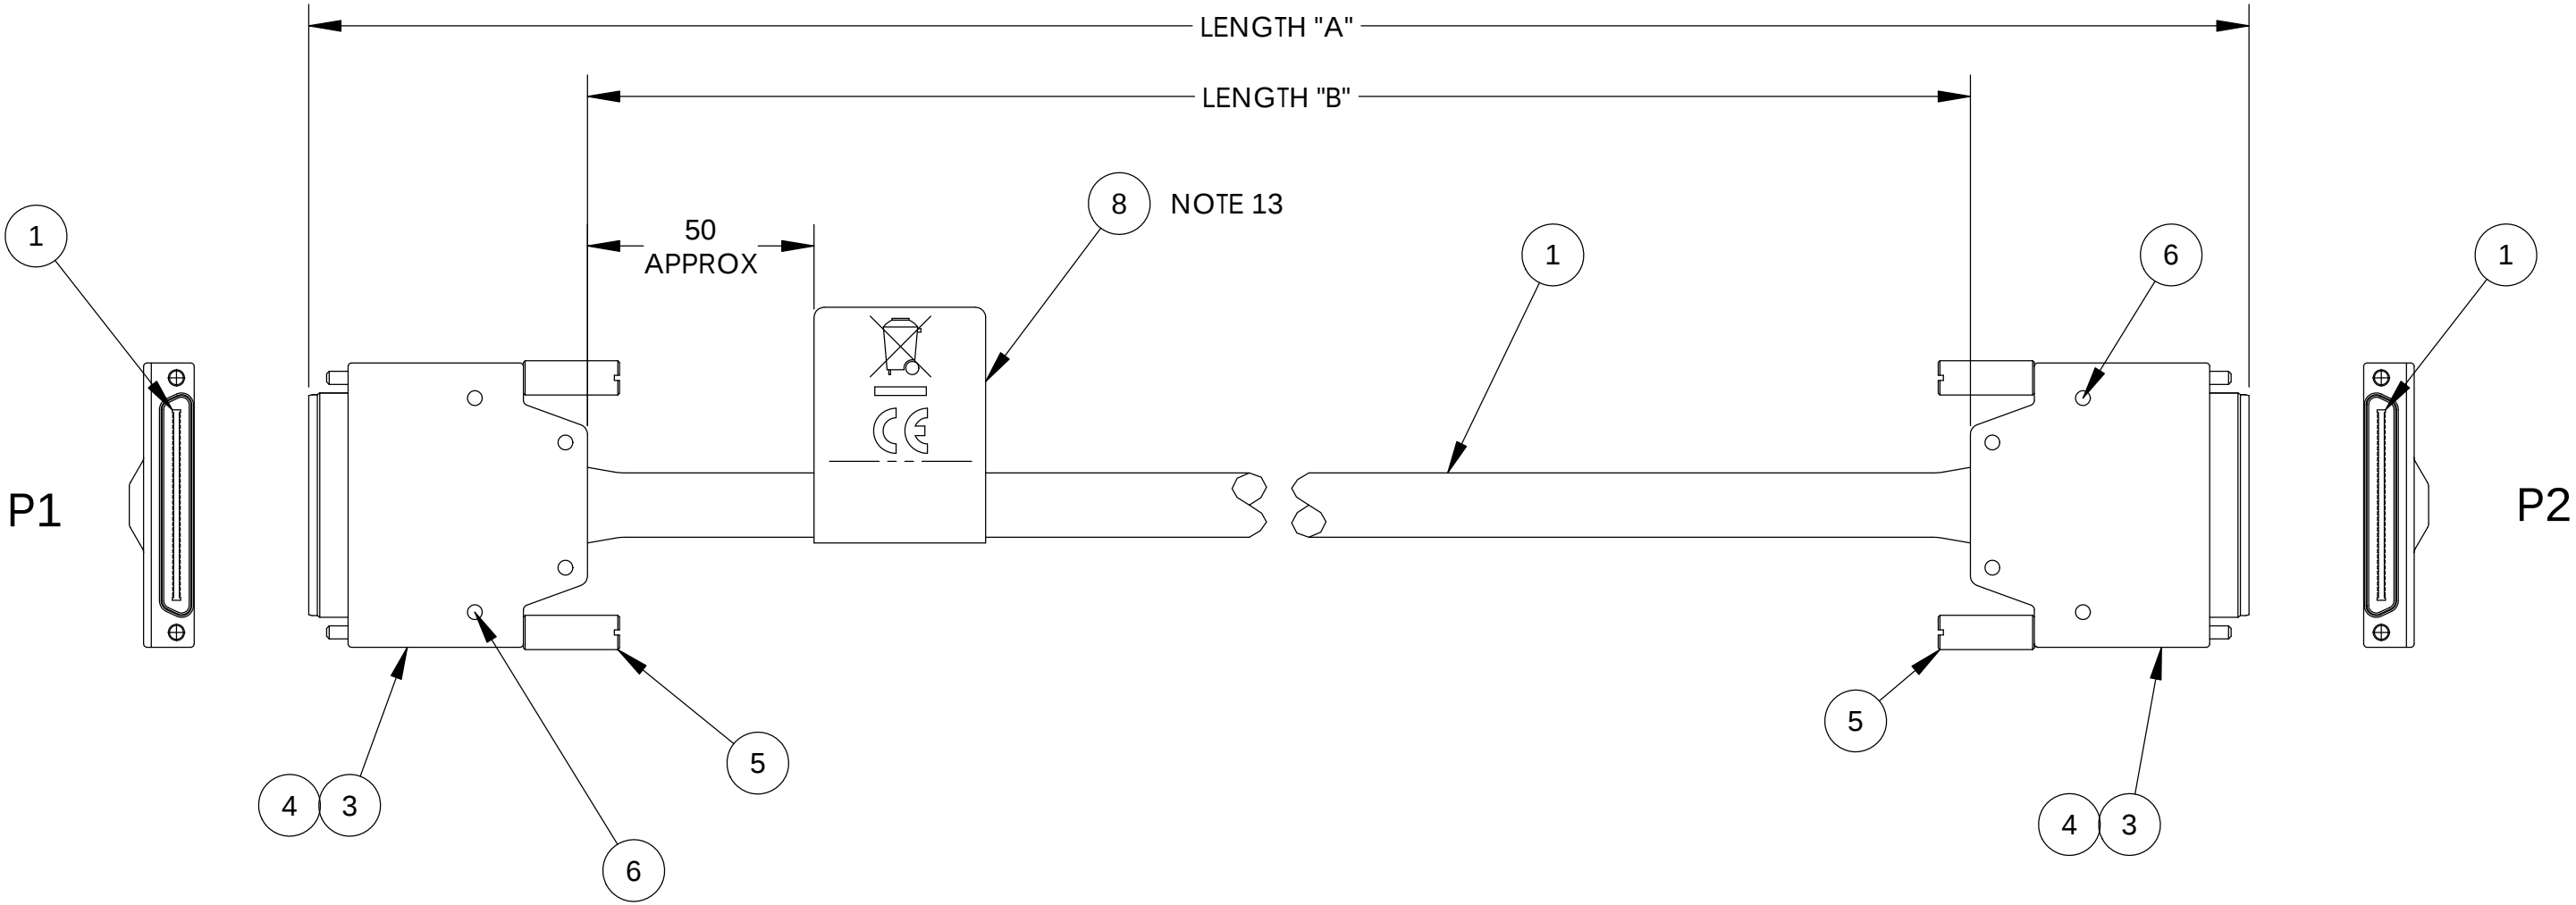

- THIS DRAWING IS RESERVED FOR AMPHENOL ACD.
- SEE CS-1099 FOR CABLE TO SHELL TERMINATION REQUIREMENTS ON P1/P2 CONNECTOR ENDS.
- CABLE MUST WITHSTAND 20 LBS. OF PULL WITHOUT DAMAGE TO WIRES OR CONNECTOR (BOTH ENDS).
- 100% SHIELDING REQUIRED FROM P1 TO P2 END.
- UL LABEL MUST BE ON THE SHIPPING CARTON PER SUBJECT 764 OF THE UL COMPONENT WIRING HARNESS (ZPFW2) FILE #E215031.
- CABLE ASSEMBLY TO BE TESTED PER CS-1089.
- WIRE ASSEMBLY PER CS-1087-04.
- SHIPPING CARTON SHALL BE MARKED WITH ACD P/N, DATE CODE, P.O. NUMBER AND QUANTITY.
- P1/P2 CONNECTOR ORIENTATION ON ASSEMBLY 56032XX01 MUST BE AS SHOWN.
- ALL MATERIALS USED IN THE MANUFACTURE OF THIS ASSEMBLY SHALL COMPLY WITH AMPHENOL REGULATED MATERIALS SPECIFICATION CS-1152.
- UNLESS STATED OTHERWISE, ALL DIMENSIONS ARE IN MILLIMETERS (MM).
- SIMILAR TO AMPHENOL SPEC 51069XXXX.
- PERMANENTLY MARK LABEL WITH 'WEEE' LOGO AND 'CE' LOGO, REF AHSI SPEC CS-1210. A ROHS2 CERTIFICATE OF COMPLIANCE MUST BE INCLUDED IN EACH SHIPPING CARTON.

AMPHENOL P/N	AMPHENOL ACD P/N	LENGTH "A"	LENGTH "B"
560320001	CS-VHDCIMX200-000.5	500 ±10	N/A
560320002	CS-VHDCIMX200-001	1000 ±20	N/A
560320003	CS-VHDCIMX200-002	2000 ±40	N/A
560320004	CS-VHDCIMX200-003	3000 ±60	N/A
560320005	CS-VHDCIMX200-005	5000 ±100	N/A
560320006	CS-VHDCIMX200-006	6000 ±120	N/A
560320007	CS-VHDCIMX200-008	8000 ±160	N/A
560320008	CS-VHDCIMX200-004	4000 ±80	N/A
560320009	CS-VHDCIMX200-001.5	1500 ±30	N/A
560320010	CS-VHDCIMX200-011	11000 ±220	N/A
560320011	CS-VHDCIMX200-001.75	N/A	1750 ±35

SPECIFICATION CONTROL DRAWING



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: DECIMALS ANGLES .X ±.X ±.5° .XX ±.01 .XXX ±.005		EAR NO. 80014-604A		Amphenol Interconnect Products Corp. 20 Valley St. Endicott, NY, 13760	
		APPROVALS	DATE		
THIRD ANGLE PROJECTION 		DRAWN D.CASHIMERE	9/06	CABLE ASSEMBLY, RND, 68P VHDCI (2X), UNIVERSAL SCSI	
		CHECKED			
		RESP ENG			
		MFG ENG			
CAD FILE: S:\SolidWorks\PE 5 DIGIT NO\56032				SIZE C DWG. NO. 56032XXXX	REV. E
				SCALE 1:1	SHEET 1 OF 1