

MQ15-X- Power male receptacle front mount

PVC 6x2,5 UL/CSA 0,25m

Art.No.: 7000-P8181-P800025

Weight: 0.051

Country of origin: DE

Model designation: MSWAQ3FV-P80_0.25

Flange male

MQ15, 6-pole

with multi-strand wire


Front mounting

Hexagon nut M20x1,5 (SW26) for flange connector included in the delivery package.


Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Further cable lengths on request.


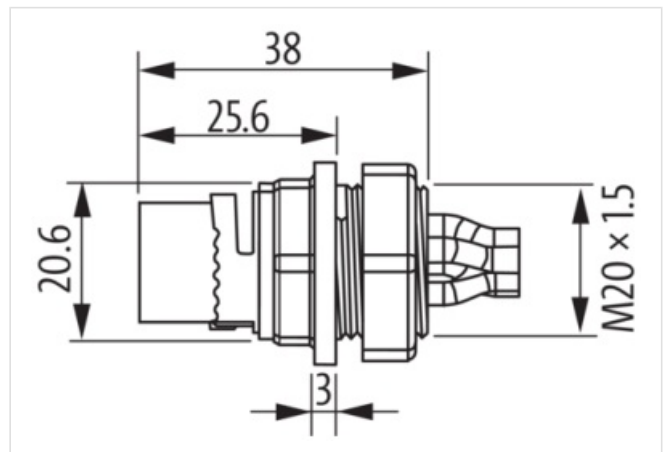
[Link to Product](#)**Illustration**

1	BK 1
2	BK 2
3	BK 3
PE	GN YE
A	BU A
B	BU B

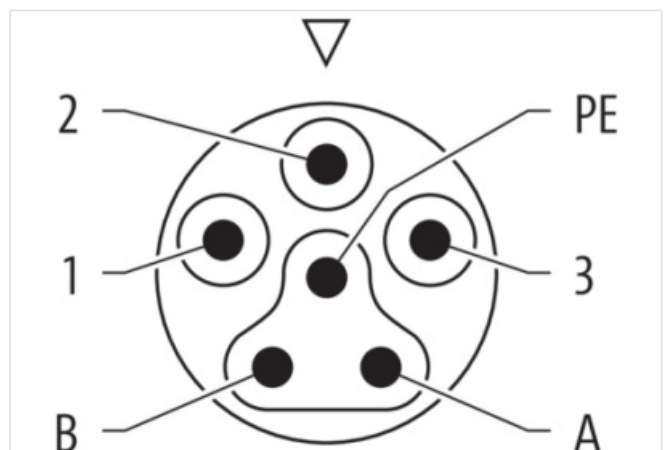

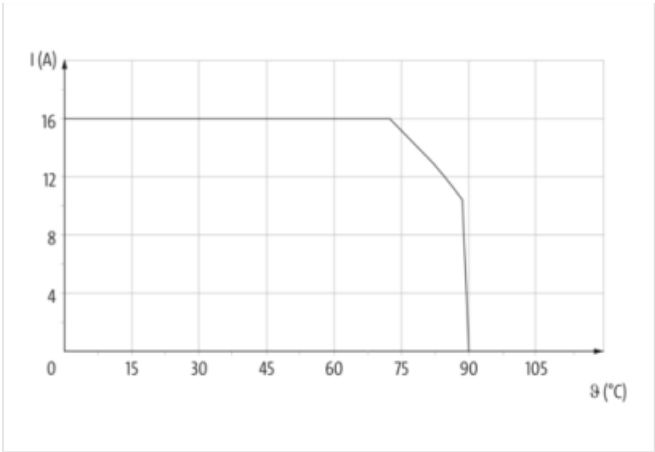

Product may differ from Image

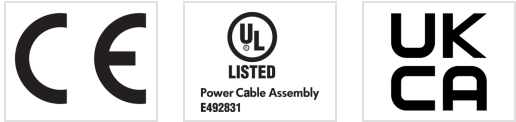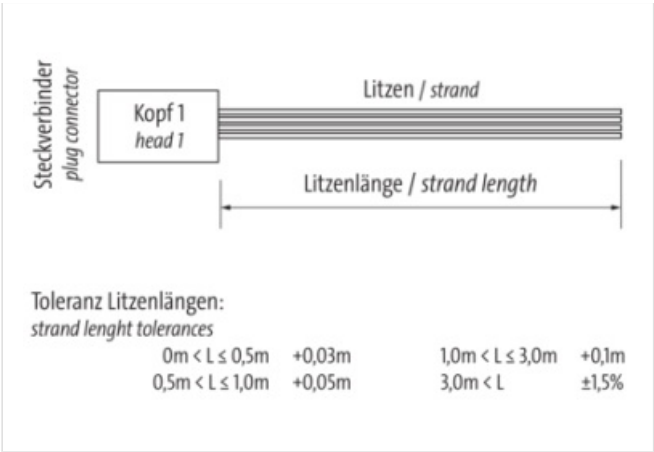

Header	
Material short text	MSWAQ3FV-P80_0.25
Cable length	0,25 m
Side 1	
Family construction form	MQ15
No. of poles	6
Coding	Type 3
Mounting method	inserted, screwed
Material contact	Copper alloy
Coating contact	silver-plated
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-P8181-P800025
GTIN	4048879590853
ECLASS-6.0	27279220
ECLASS-6.1	27279220
ECLASS-7.0	27440103
ECLASS-7.1	27440103
ECLASS-8.0	27440103
ECLASS-8.1	27440103
ECLASS-9.0	27440103
ECLASS-9.1	27440109
ECLASS-10.0.1	27440109
ECLASS-10.1	27440103
ECLASS-11.0	27440109
ECLASS-11.1	27440103
ECLASS-12.0	27440103
ECLASS-13.0	27440109
ECLASS-14.0	27440109
ETIM-5.0	EC002061
ETIM-6.0	EC002061
customs tariff number	85444290
EAN	4048879590853
Packaging unit	1

Electrical data Supply	
Operating voltage AC per power contact max.	600 V
Operating current per power contact max.	16 A
Operating voltage AC per signal contact max.	63 V
Operating voltage DC per signal contact max.	63 V
Operating current per signal contact max.	10 A
Diagnostics	
Status indication LED	no
Installation Connection	
Tightening torque	6 Nm
Mounting set	M20 x 1.5
Width across flats	SW22
Mating cycles min.	500
Installation Pin assignment	
Configuration	fully used
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP67
Protection NEMA	6P, 4, 3
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	6 kV
Material group (IEC 60664-1)	I
Mechanical data Material data	
Material housing	Brass
Coating housing	nickel plated
Material contact carrier	PA
Mechanical data Mounting data	
Looking techniques	bayonet-locking
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	70 °C
Additional condition temperature range	depending on cable quality
Important installation notes	
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Conformity	
Product standard	EN IEC 61076-2-116
Approvals	
UL 50E	yes
Electrical data Cable	
Cable identification	P80
Wire arrangement	black 1, black 2, black 3, green-yellow, blue
Material wire insulation	PVC
Amount wires	6
Outer diameter insulation	3.7 mm
Conductor crosssection (wire)	2.5 mm ²
Material conductor wire	copper stranded wire, tinned
Conductor type (wire)	Strand class 5
Nominal voltage AC max.	600 V

Withstand voltage (wire - wire)	2.5 kV
Withstand voltage (wire - jacket)	2.5 kV
