
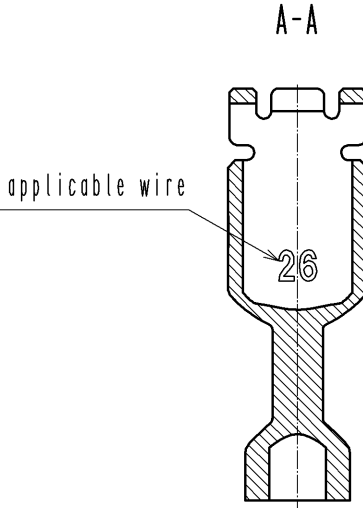
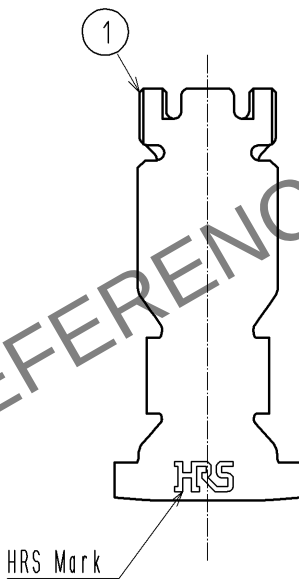
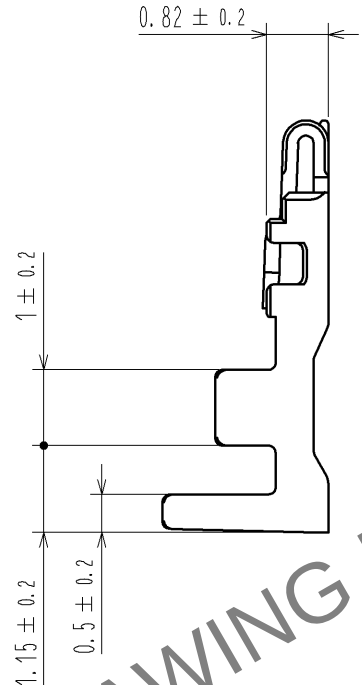


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

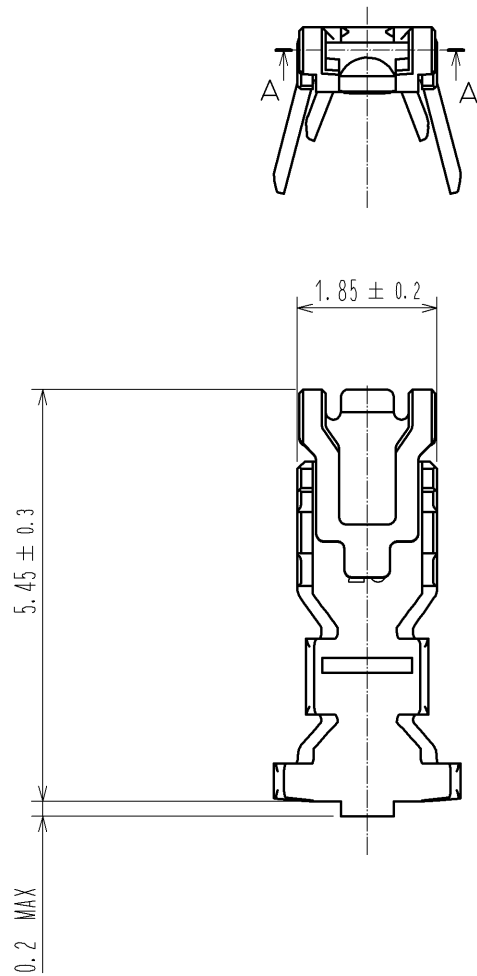

Notes
1. 1Pack : 100 contacts.
2. Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0778
For Mating/Unmating / Operation manual ETAD-H0779

				1	Copper Alloy		Surface :Tin plating 1μm MIN			
NO.	MATERIAL		FINISH , REMARKS		NO.	MATERIAL		FINISH , REMARKS		
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.			APPROVED : KI. AKIYAMA		14. 08. 01	DRAWING NO.	EDC3-358516-01			
			CHECED : HK. UMEHARA		14. 08. 01	PART NO.	DF59M-2628PC			
			DESIGNED : SZ. ONO		14. 08. 01	CODE NO.	CL667-0045-6-00			
			DRAWN : SZ. ONO		14. 08. 01		1/1			