

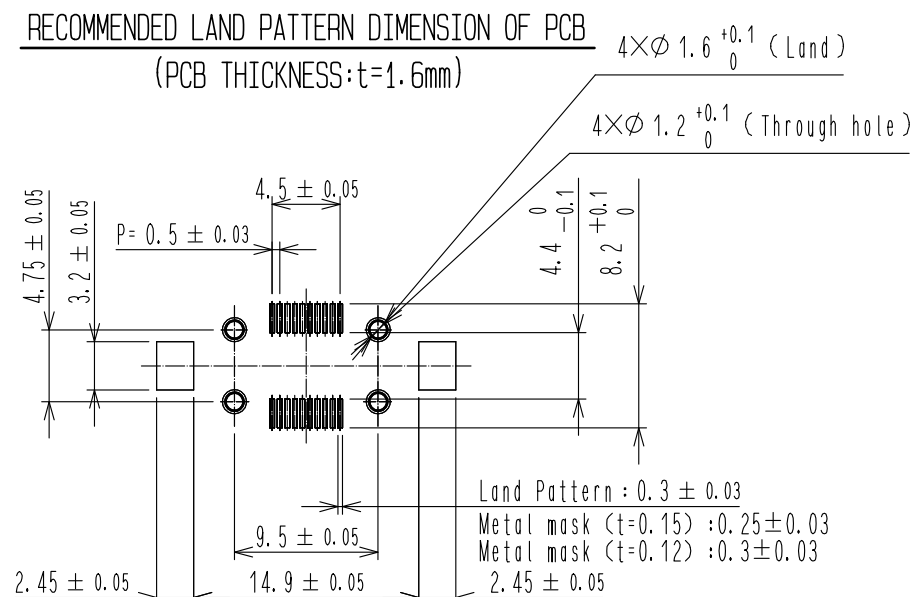
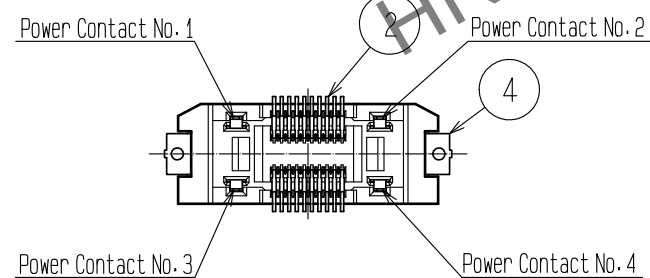
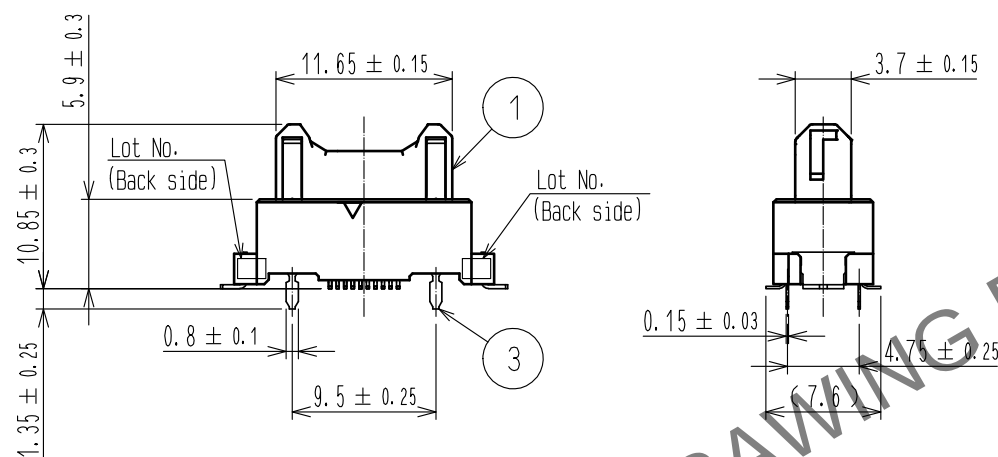


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

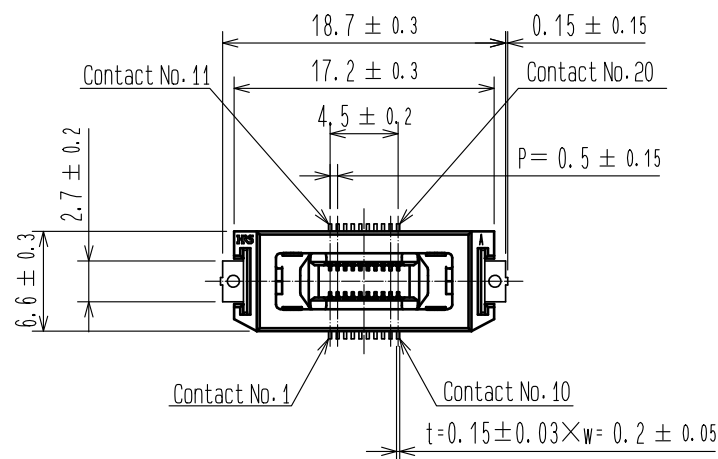


6 PCB DISTANCE (No scale)

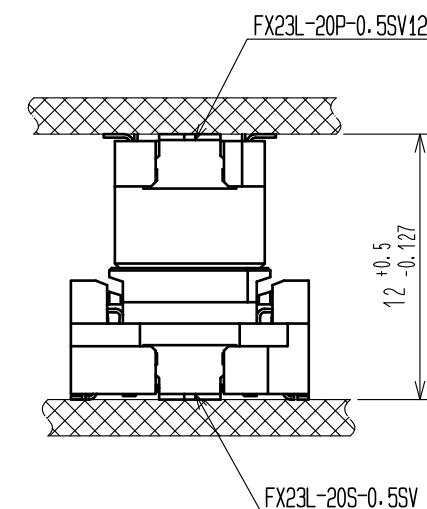

- Note
- 1 Lead CO-Planarity is 0.1mm MAX.
 - 2 This is packaged in embossed carrier tape. (300pcs/RL)
 - 3 It shows the vacuum pickup area. Remove the mylar tape before mating connectors.
 - 4 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.
 - 5 The dimensions in parentheses are for references.
 - 6 Please use the connectors within the specified PCB distance.




			7	POLYIMIDE	CTAPE FOR VACUUM PICKUP)
			6	POLYESTER	(EMBOSSSED COVER TAPE)
			5	POLYSTYRENE	(EMBOSSSED CARRIER TAPE)
2	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm	4	BRASS	TIN-PLATING 1 μm
		LEAD AREA:GOLD 0.03 μm	3	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm
		UNDER PLATING:NICKEL 1.3 μm			LEAD AREA:TIN-PLATING 1 μm
1	POLYAMIDE	BLACK UL94V-0			UNDER PLATING:NICKEL 1.3 μm
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE


	HIROSE ELECTRIC CO., LTD.	APPROVED :NH. NAKATA	17. 04. 10	DRAWING NO.	EDC-358057-20-00
		CHECKED :HT. YAMAGUCHI	17. 04. 10	PART NO.	FX23L-20P-0. 5SV12(20)
		DESIGNED :TS. OONO	17. 04. 10	CODE NO.	CL573-2201-4-20
		DRAWN :TS. OONO	17. 04. 10		 1/

Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

2 Drawing for packing(2:1)

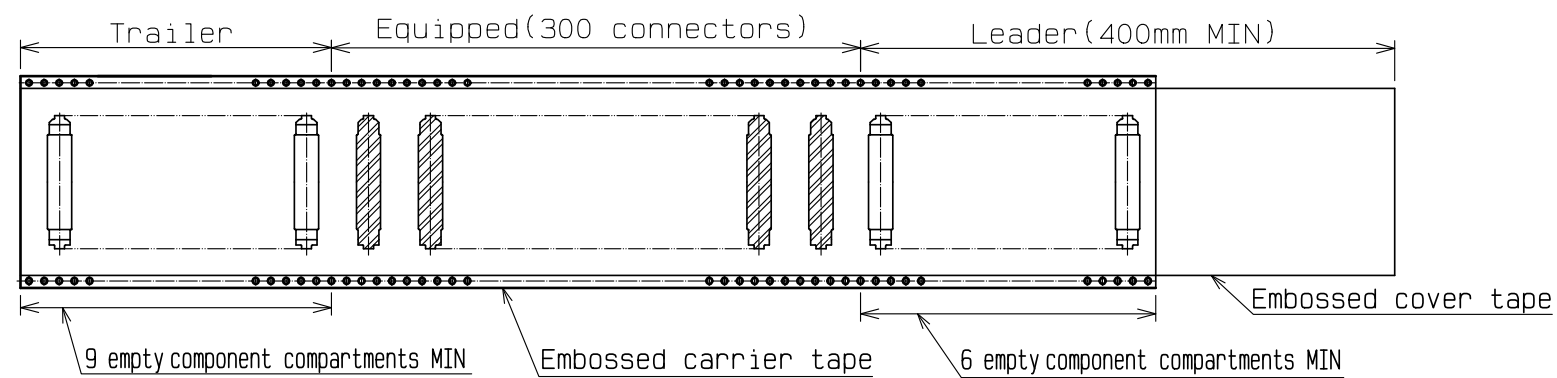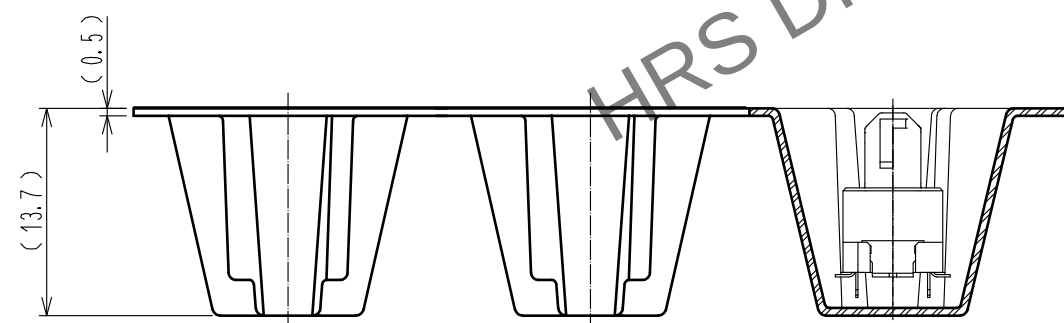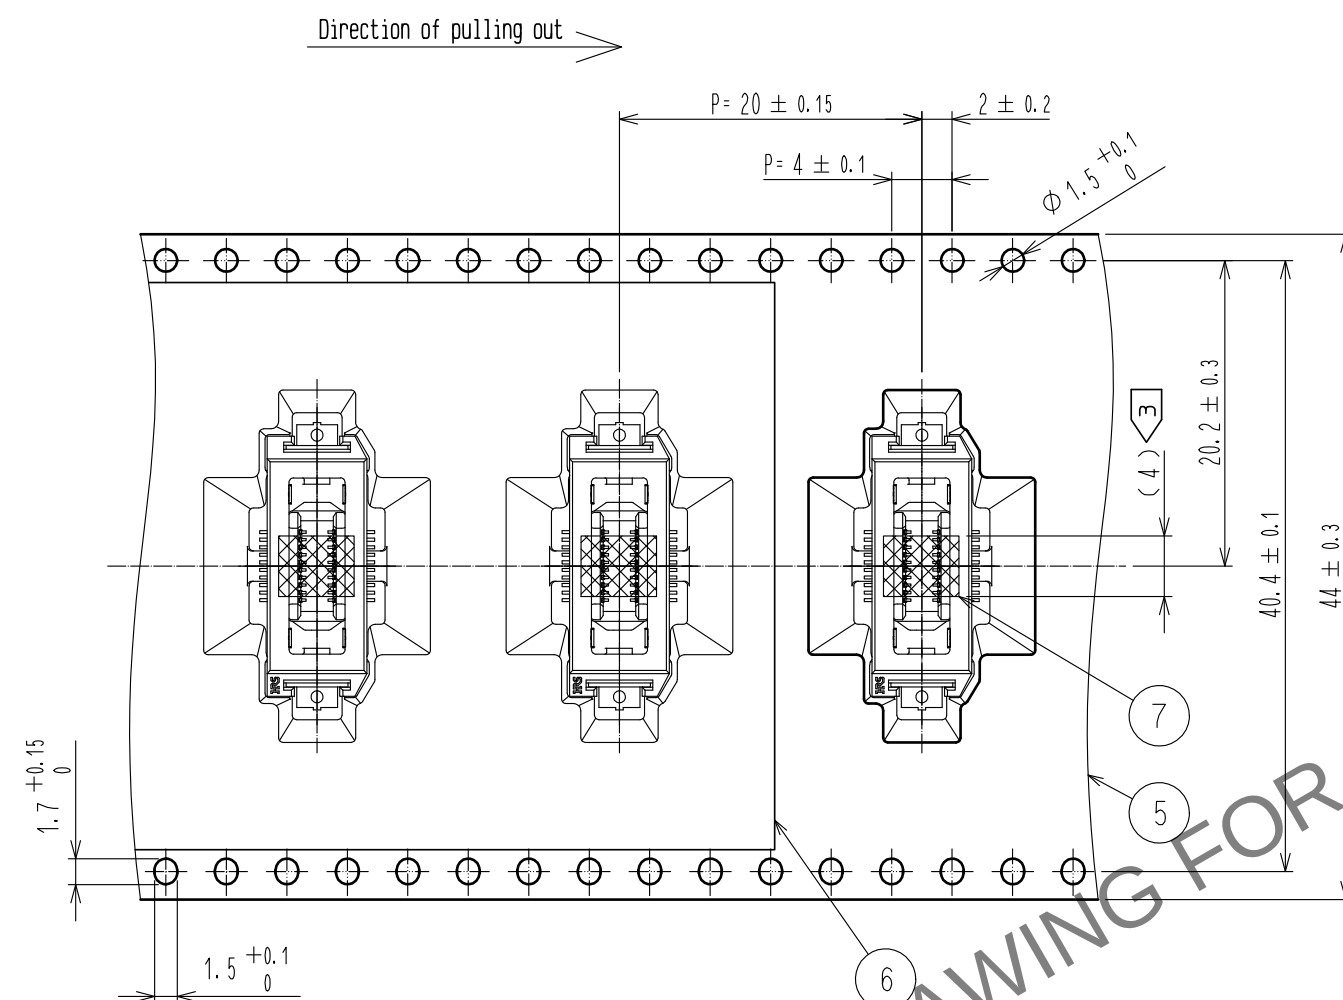

REEL DIMENSION(No scale)

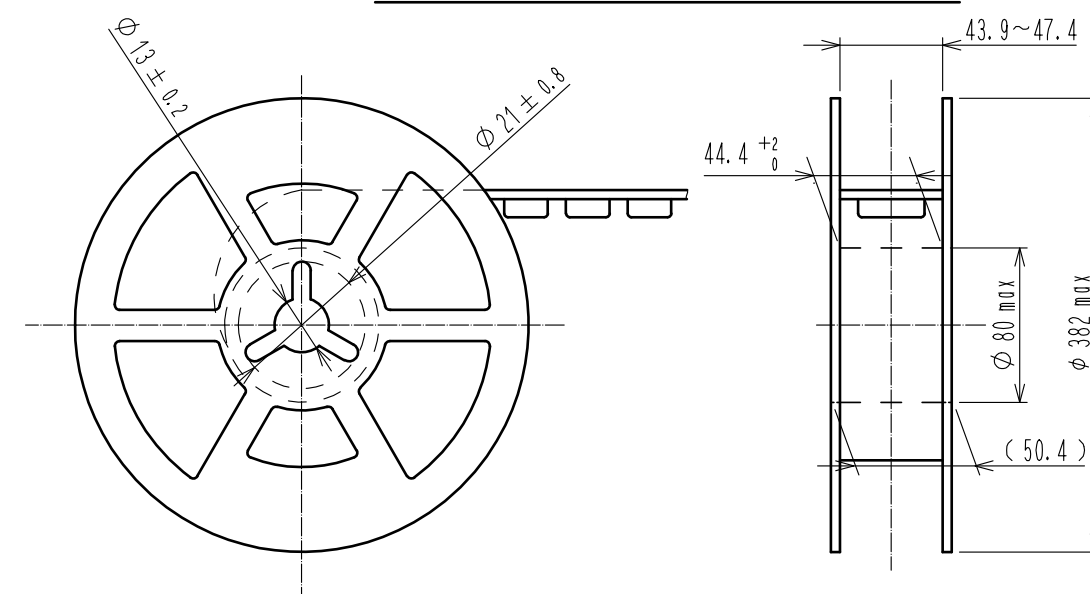

HRS

DRAWING NO.	EDC-358057-20-00
PART NO.	FX23L-20P-0.5SV12(20)
CODE NO.	CL573-2201-4-20

2/2