



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

A

A ± 0.3

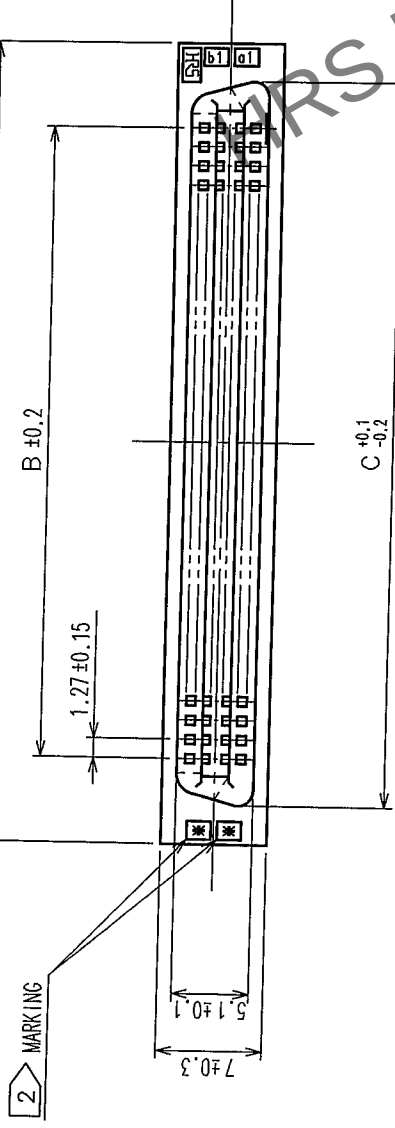



RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)

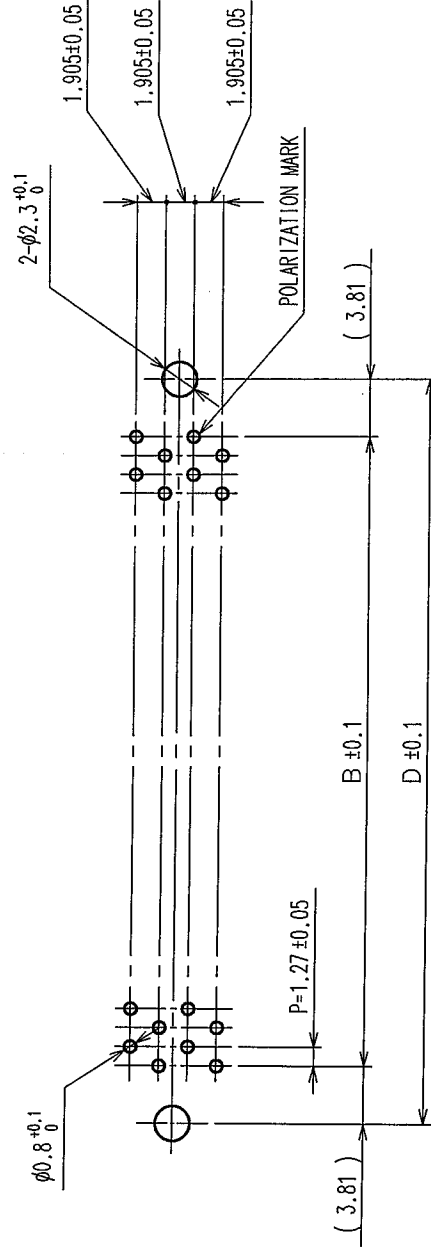

B

3 LOT NO. MARKING



POLARIZATION MARK

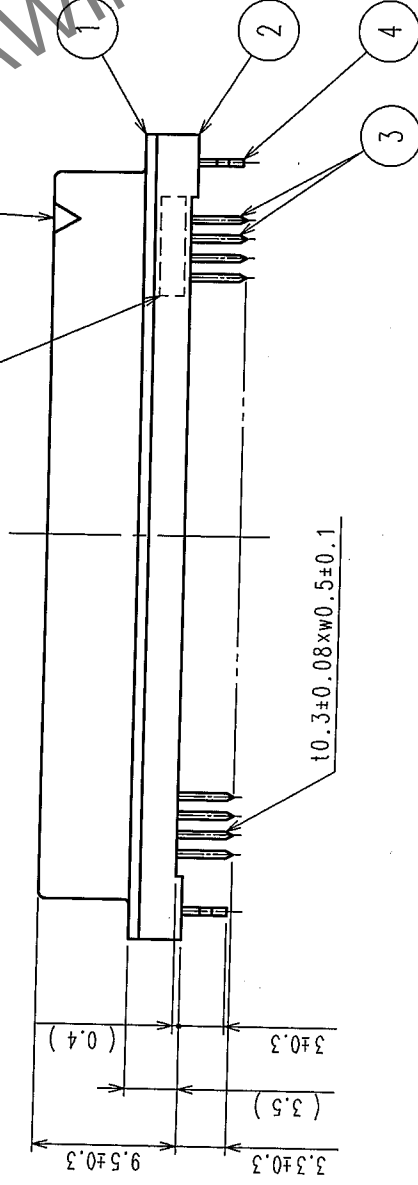

HRS No.	PART No.	1	A	B	C	D	2
FX2CA-20S-1.27DSAL(71)	CL572-2551-0-71	20	22.75	11.43	17.63	19.05	10
FX2CA-32S-1.27DSAL(71)	CL572-2552-2-71	32	30.37	19.05	25.25	26.67	16
FX2CA-40S-1.27DSAL(71)	CL572-2553-5-71	40	35.45	24.13	30.33	31.75	20
FX2CA-52S-1.27DSAL(71)	CL572-2554-8-71	52	43.07	31.75	37.95	39.37	26
FX2CA-60S-1.27DSAL(71)	CL572-2555-0-71	60	48.15	36.83	43.03	44.45	30
FX2CA-68S-1.27DSAL(71)	CL572-2556-3-71	68	53.23	41.91	48.11	49.53	34
FX2CA-80S-1.27DSAL(71)	CL572-2557-6-71	80	60.85	49.53	55.73	57.15	40
FX2CA-100S-1.27DSAL(71)	CL572-2558-9-71	100	73.55	62.23	68.43	69.85	50
FX2CA-120S-1.27DSAL(71)	CL572-2559-1-71	120	86.25	74.93	81.13	82.55	60

D

D ± 0.2

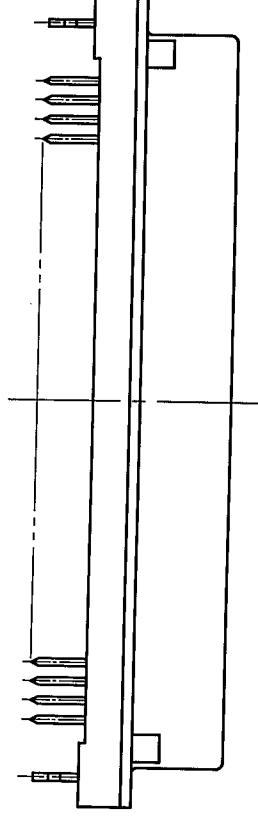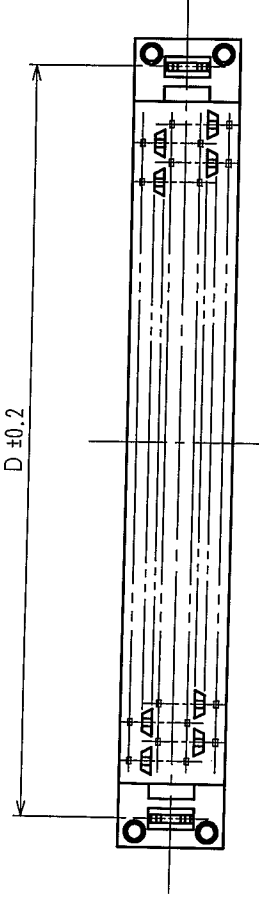

NOTE 1 NUMBER OF PIN.

2 INDICATIONS.

3 SURFACE INDICATED LOT NO. SHALL BE OPTIONAL.

4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

4	PHOSPHOR BRONZE	TIN PLATED	3	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.2 μ m min
1,2	POLYAMIDE	BLACK			DIP AREA: TIN-PLATING 2 μ m min
		UL94V-0			UNDER PLATING: NICKEL 2 μ m min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)			DESIGNED		
			CHECKED		
			APPROVED		
			RELEASED		
DRAWING NO.			PART NO.		
EDC3-083064-21			FX2CA-*S-1.27DSAL(71)		
SCALE			CODE NO.		
FREE			CL572		
UNITS					
mm					

1

2

3

4

5

6

7

8